

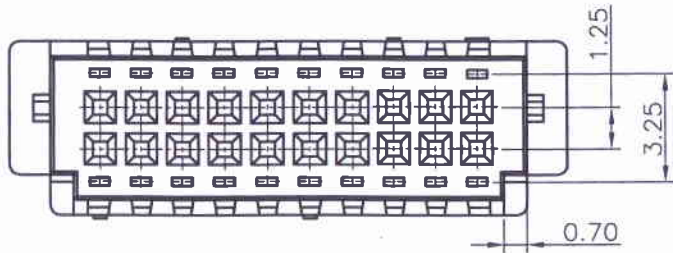
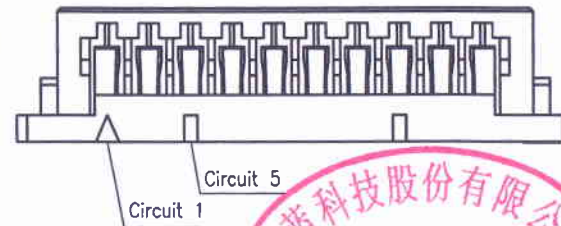



RoHS

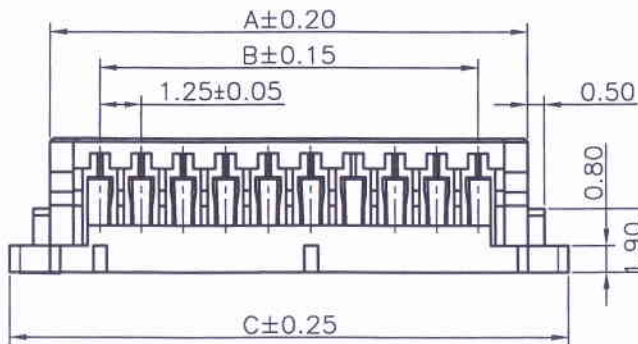

Specifications:

Rated Voltage : 100V AC/DC
 Rated Current : 1A AC,DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 500MΩ(MIN.)
 Temperature Range : -25°C~+85°C

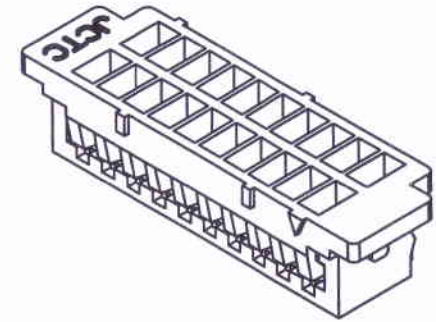


Dimensional Ordering Information:			
Circuits Part No	Dimensions		
	A	B	C
2x5P	8.00	5.00	10.40
2x6P	9.25	6.25	11.65
2x7P	10.50	7.50	12.90
2x8P	11.75	8.75	14.15
2x9P	13.00	10.00	15.40
2x10P	14.25	11.25	16.65
2x15P	20.50	17.50	22.90
2x20P	26.75	23.75	29.15
2x25P	33.00	30.00	35.40

11252H00-2xNPX

① ② ③ ④

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
Blank : Natural type

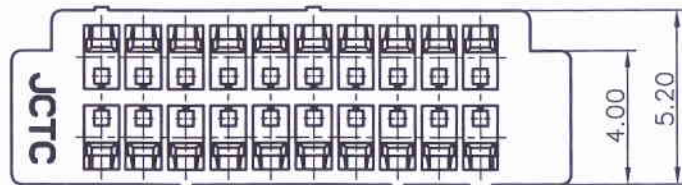

Suitable for JCTC 11252 series terminal

Part No.	Material	Color
11252H00-2xNP	Nylon 66,UL94V-0	Natural
11252H00-2xNPJ	Nylon 66,UL94V-0	Gray
11252H00-2xNPB	Nylon 66,UL94V-0	Brown
11252H00-2xNP-HF	Nylon 66,UL94V-0	Natural
11252H00-2xNPJ-HF	Nylon 66,UL94V-0	Gray

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO: 11252H00-2xNPX-XX
C1	HR1107130110	11.07.13	LINEAR	1:1			
C2	新增颜色	14.04.11	ANGLES	APPROVED			
C3	HN1506020089	15.06.03	0.0±0.25 X° REF±6°	DESIGNER			REV: C4 SHEET: 1/1
C4	变更公司名称	17.01.02	0.00±0.15 X° ±3°	DRAWN	邓群庄	17.01.02	
			0.00±0.08 X° X'±2°	TITLE: DF13 1.25mm PITCH HOUSING			

JCTC 胜蓝科技股份有限公司
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司