


RoHS

Dimensional Ordering Information:				
Circuits Part No	Dimensions			
	A	B	C	D
2P	1.25	4.40	3.50	
3P	2.50	5.65	4.75	
4P	3.75	6.90	6.00	
5P	5.00	8.15	7.25	
6P	6.25	9.40	8.5	5.00
7P	7.50	10.65	9.75	6.25
8P	8.75	11.90	11.00	7.50
9P	10.00	13.15	12.25	8.75
10P	11.25	14.40	13.50	10.00
12P	13.75	16.90	16.00	12.50
15P	17.50	20.65	19.75	16.25
20P	23.75	26.90	26.00	22.50
25P	30.00	33.15	32.25	28.75
26P	31.25	34.40	33.50	30.00
30P	36.25	39.40	38.50	35.00

11253H00-NPX-HF  
① ② ③④ ⑤

- ① Series No.
- ② W90 : Side Contact  
W00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)  
Blank : Natural type
- ⑤ HF : Halogen Free

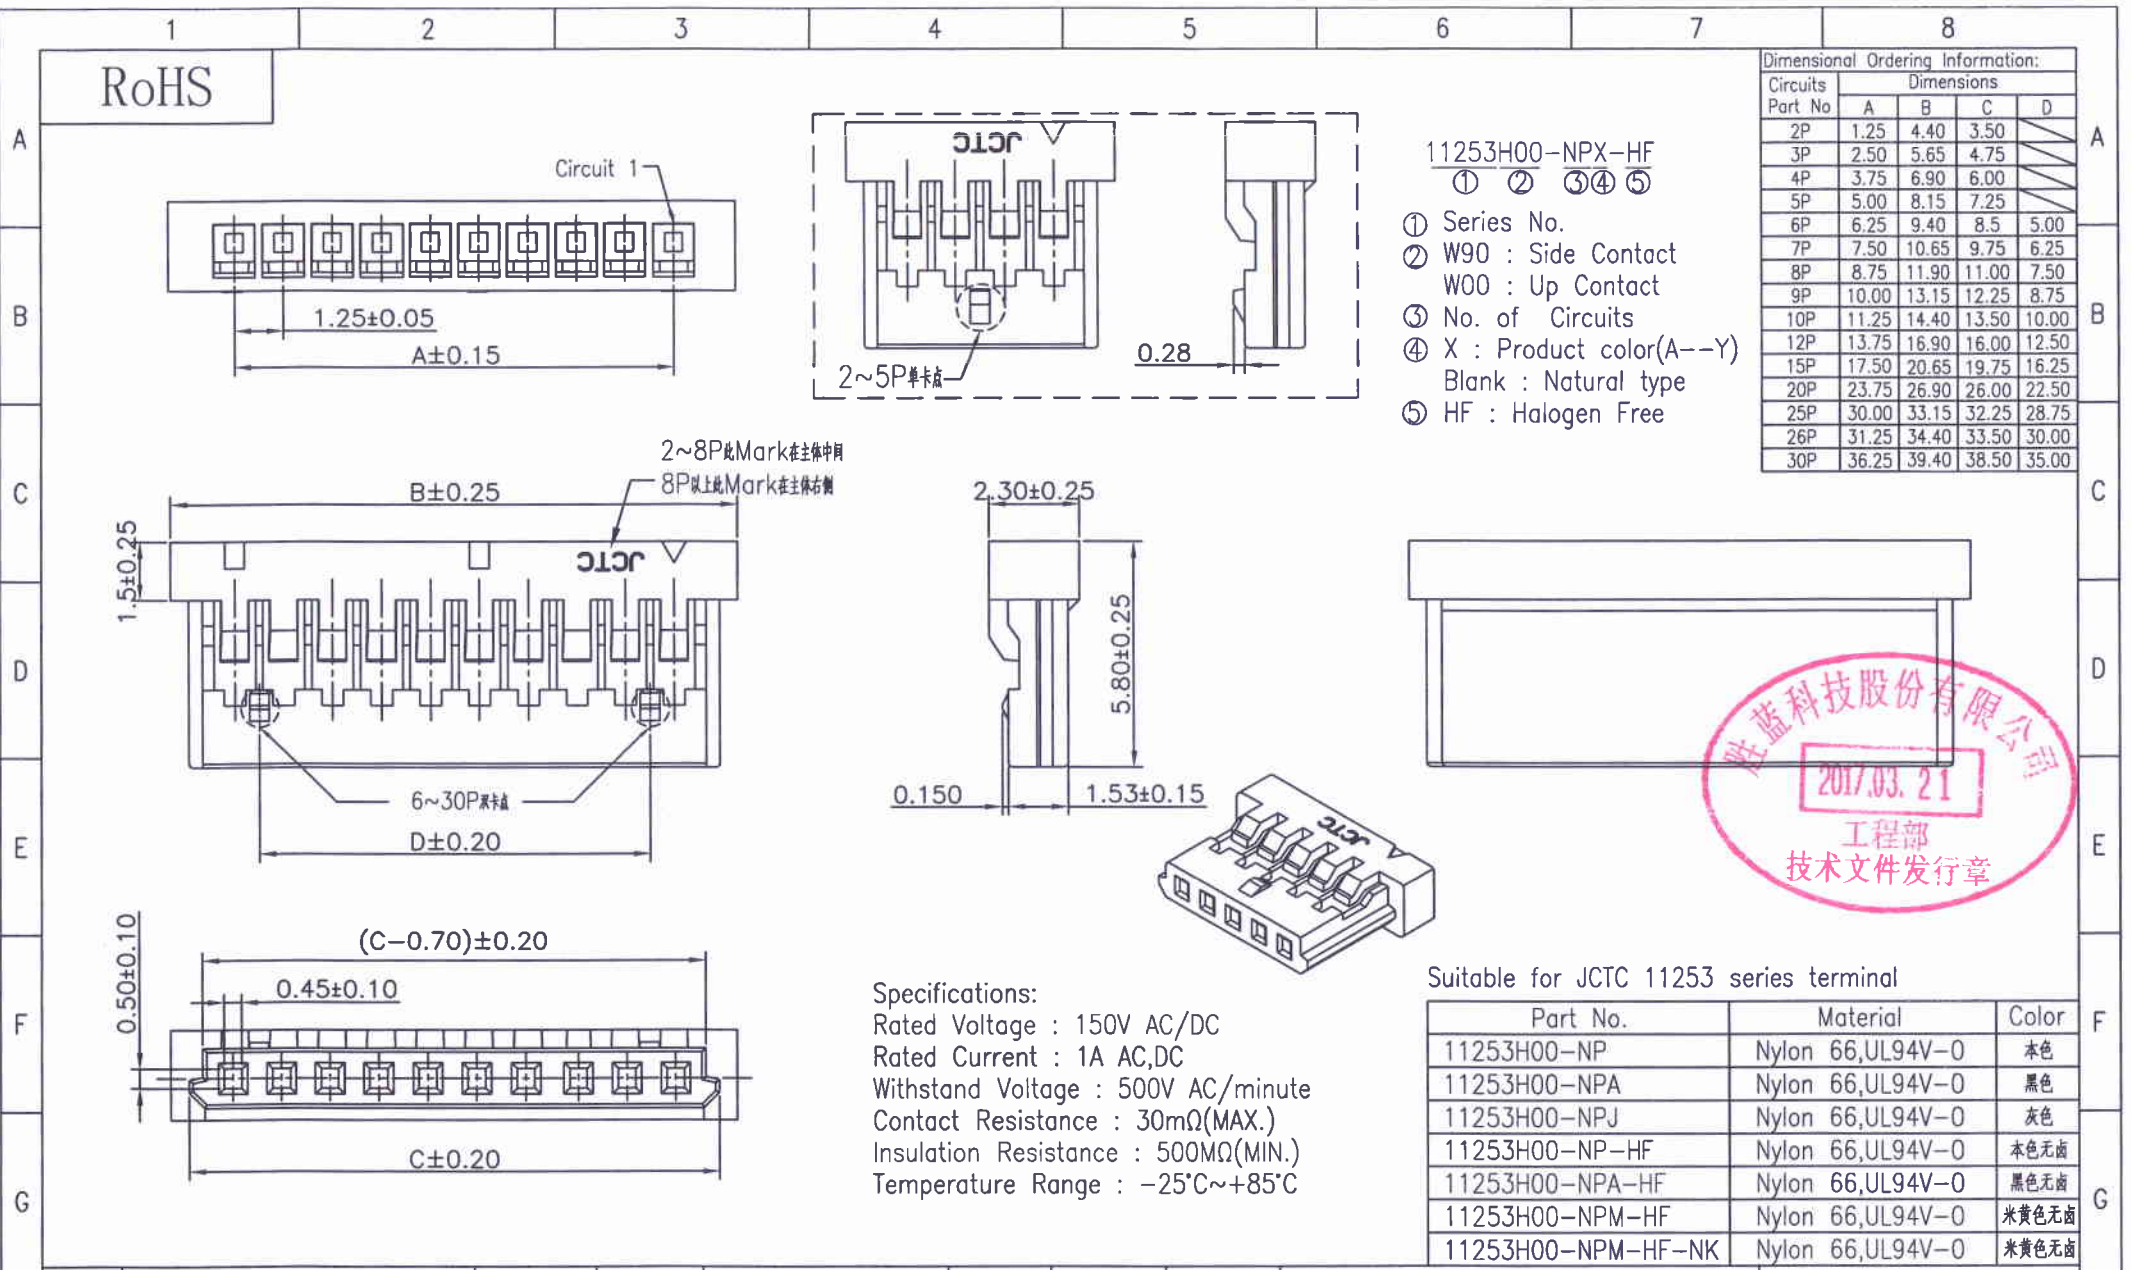

Specifications:  
 Rated Voltage : 150V AC/DC  
 Rated Current : 1A AC,DC  
 Withstand Voltage : 500V AC/minute  
 Contact Resistance : 30mΩ(MAX.)  
 Insulation Resistance : 500MΩ(MIN.)  
 Temperature Range : -25°C~+85°C

Suitable for JCTC 11253 series terminal

Part No.	Material	Color
11253H00-NP	Nylon 66,UL94V-0	本色
11253H00-NPA	Nylon 66,UL94V-0	黑色
11253H00-NPJ	Nylon 66,UL94V-0	灰色
11253H00-NP-HF	Nylon 66,UL94V-0	本色无卤
11253H00-NPA-HF	Nylon 66,UL94V-0	黑色无卤
11253H00-NPM-HF	Nylon 66,UL94V-0	米黄色无卤
11253H00-NPM-HF-NK	Nylon 66,UL94V-0	米黄色无卤

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	<b>JCTC®</b> 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司  TITLE: DF14 1.25mm PITCH HOUSING	PART. NO:
D2	HR1407020099	14. 07. 02	LINER	1:1				11253H00-NPX-XX
D3	新增2P规格	15. 11. 18	0.0±0.25	APPROVED				DWG. NO:
D4	HR1605110060	16. 05. 17	0.00±0.15	DESIGNER				ENDE05
D5	更换公司名称	17. 03. 14	0.000±0.08	DRAWN	邓群庄	17. 03. 14		REV: D5 SHEET: 1/1