

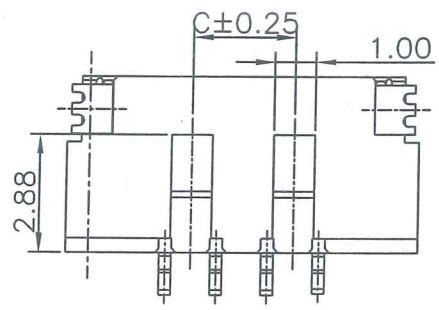
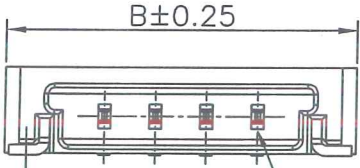




1.25±0.10 A±0.20 0.30±0.03

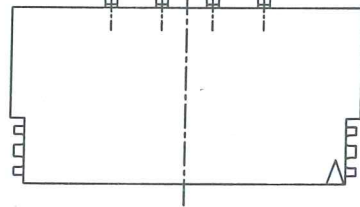

1.25±0.10 A±0.10 Circuit 1 0.70±0.10 1.90

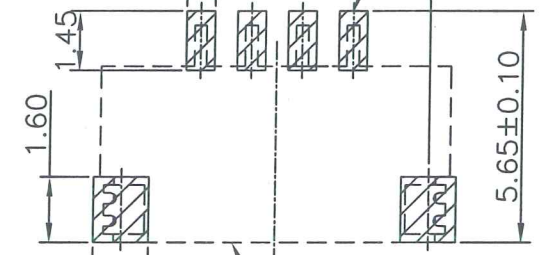

P.C.B. LAYOUT

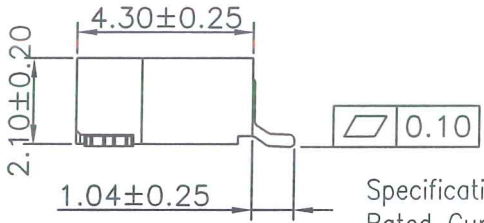

11256W90-NPX-B-S-HF

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color (A--Y)
Blank : Natural type
- ⑤ B: B type
- ⑥ S: SMT type
- ⑦ HF: Halogen Free



Specifications:
 Rated Current : 1A AC,DC
 Rated Voltage : 150V AC/DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 500MΩ(MIN.)
 Temperature Range : -35°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

Dimensional Ordering Information:			
Circuits Part No	Dimensions		
	A	B	C
4P	3.75	8.60	2.50
5P	5.00	9.85	3.75
6P	6.25	11.10	5.00

Part No.	Material	Color	Pin Material	Solder Tabs
11256W90-NP-B-S	High temperature plastic,UL94V-0	Natural(Beige)	Phosphor Bronze/Gold-plated	Brass/Gold-flash
11256W90-NPA-B-S	High temperature plastic,UL94V-0	Natural(Black)	Phosphor Bronze/Gold-plated	Brass/Gold-flash
11256W90-NPA-B-S-HF	High temperature plastic,UL94V-0	Natural(Black)	Phosphor Bronze/Gold-plated	Brass/Gold-flash
11256W90-NP-B-S-2E-HF	High temperature plastic,UL94V-0	Natural(Beige)	Phosphor Bronze/Tin-plated	Brass/Tin-flash

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	 JCTC ® TERMINAL&CONNECTORS
C0	新图面发行	14.05.23		LINEAR	ANGLES	APPROVED	Nelson	21.05.13	11256W90-NPX-B-S	ENDE05	
C1	WN1605040052	16.05.04	0.0±0.25	X° REF±6°	DESIGNER	vm	21.05.13	TITLE:	1.25mm PITCH WAFER		
C2	变更公司名称	17.03.16	0.00±0.15	X° ±3°	DRAWN	QYX	21.05.13				
C3	换图框发行	21.05.13	0.000±0.08	X° X'±2°							

REV: C3 SHEET: 1/1