


Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

Part No	A	B	C
2P	--	4.10	3.70
3P	3.00	5.60	5.20
4P	4.50	7.10	6.70
5P	6.00	8.60	8.20
6P	7.50	10.10	9.70
7P	9.00	11.60	11.20
8P	10.50	13.10	12.70
9P	12.00	14.60	14.20
10P	13.50	16.10	15.70
11P	15.00	17.60	17.20
12P	16.50	19.10	18.70
13P	18.00	20.60	20.20
14P	19.50	22.10	21.70
15P	21.00	23.60	23.20

11500H00-NP X-HF-NK
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ A: Product color(A--Y)
Blank : Natural type
- ⑤ HF: Halogen Free
- ⑥ NK, 17 No Mark

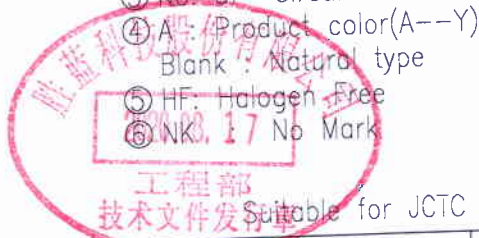

Suitable for JCTC 11500 series terminal

Part No.	Material	Color
11500H00-NP-NK	Nylon 66,UL 94V-0	Natural(White)
11500H00-NPA-NK	Nylon 66,UL 94V-0	Black
11500H00-NP-HF-NK	Nylon 66,UL 94V-0	Natural(White)
11500H00-NPA-HF-NK	Nylon 66,UL 94V-0	Black

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	PART NO: 11500H00-NPX-NK	DWG. NO: ENDE05
C0	新图面发行	14.03.24	LINEAR	APPROVED	张振坤	2008.12	TITLE: 1.50mm PITCH HOUSING	REV: C3
C1	HN1608150120	16.08.15	0.0±0.25	DESIGNER	张振坤	2008.12		
C2	更新公司名称	17.06.27	0.00±0.15	DRAWN	张振坤	20.08.12		
C3	换图框发行	20.08.12	0.000±0.08					

JCTC[®]
 TERMINAL&CONNECTORS

REV: C3 SHEET: 1/1