

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

A

B



C

D


E

F

G

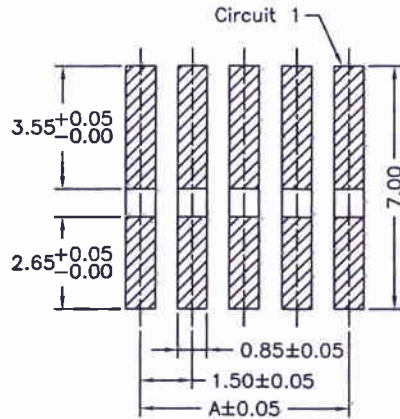



PCB LAYOUT



SPECIFICATIONS


Current Rating: 3A AC,DC  
 Voltage Rating: 350V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Pin Material: Brass/Tin-plated  
 Material: LCP,UL94V-0  
 Color: Natural(Beige)

The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

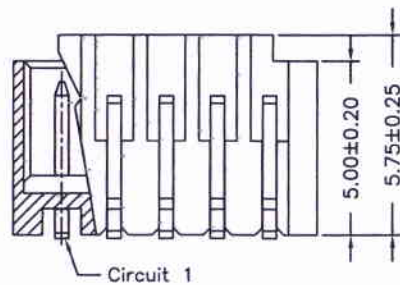

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
11500W00-2P-S	1.50	4.30
11500W00-3P-S	3.00	5.80
11500W00-4P-S	4.50	7.30
11500W00-5P-S	6.00	8.80
11500W00-6P-S	7.50	10.30
11500W00-7P-S	9.00	11.80
11500W00-8P-S	10.50	13.30
11500W00-9P-S	12.00	14.80
11500W00-10P-S	13.50	16.30
11500W00-11P-S	15.00	17.80
11500W00-12P-S	16.50	19.30
11500W00-13P-S	18.00	20.80
11500W00-14P-S	19.50	22.30
11500W00-15P-S	21.00	23.80



11500W00-NP-S

① ② ③ ④

- ① Series No.
- ② W90 : Side Contact  
W00 : Up Contact
- ③ No. of Circuits
- ④ S : SMT TYPE

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART NO:
A0	NEW REV	19.07.18	LINEAR	ANGLES	1:1	APPROVED			11500W00-NP-S
			0.0±0.25	X° REF±6°		DESIGNER	19.07.18	DWG. NO:	
			0.00±0.15	X° ±3°		DRAWN	19.07.18	ENDE05	
			0.000±0.08	X° X'±2°				REV: A0 SHEET: 1/1	

1 2 3 4 5 6 7 8