
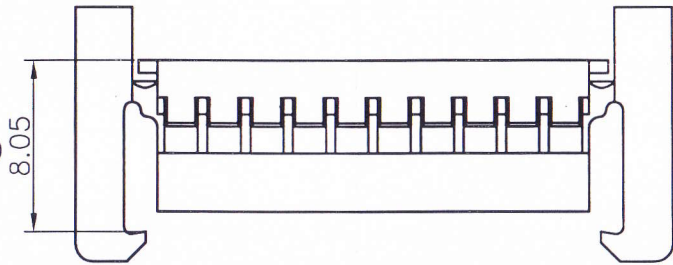
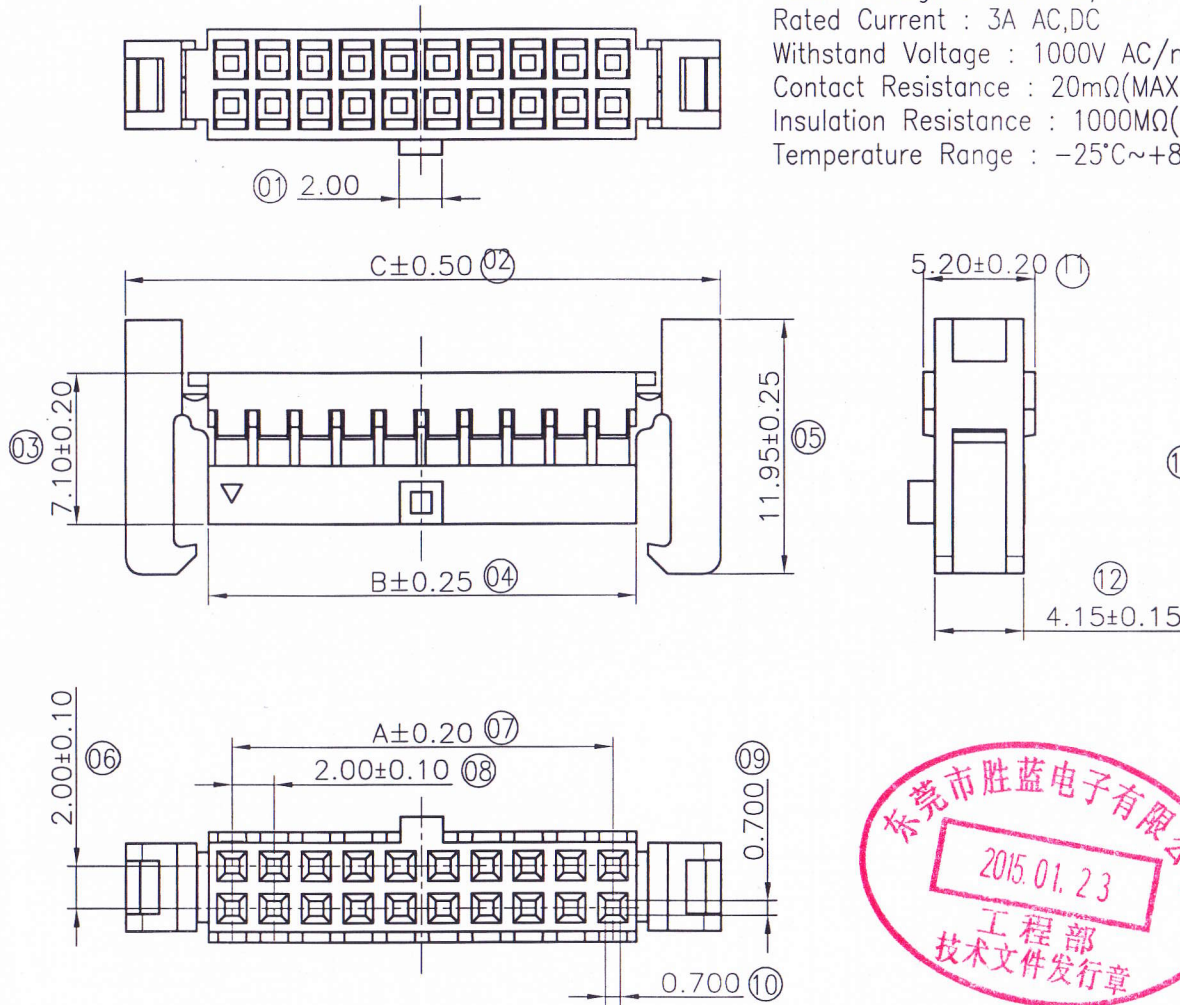


环保物料

Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C

12012H00-2xNPA-L-HF
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ A : Product color(A--Y)
A : Black type
- ⑤ L: Lock TYPE
- ⑥ HF: Halogen Free



Circuit	Dimensions			Circuit	Dimensions		
	A	B	C		A	B	C
2x3P	4.00	6.20	14.00	2x15P	28.00	30.20	38.00
2x4P	6.00	8.20	16.00	2x16P	30.00	32.20	40.00
2x5P	8.00	10.20	18.00	2x17P	32.00	34.20	42.00
2x6P	10.00	12.20	20.00	2x18P	34.00	36.20	44.00
2x7P	12.00	14.20	22.00	2x19P	36.00	38.20	46.00
2x8P	14.00	16.20	24.00	2x20P	38.00	40.20	48.00
2x9P	16.00	18.20	26.00	2x21P	40.00	42.20	50.00
2x10P	18.00	20.20	28.00	2x22P	42.00	44.20	52.00
2x11P	20.00	22.20	30.00	2x23P	44.00	46.20	54.00
2x12P	22.00	24.20	32.00	2x24P	46.00	48.20	56.00
2x13P	24.00	26.20	34.00	2x25P	48.00	50.20	58.00
2x14P	26.00	28.20	36.00				



Part No.	Material	Color
12012H00-2xNP-L-HF	Nylon 66,UL94V-0	Natural(White)
12012H00-2xNPA-L-HF	Nylon 66,UL94V-0	Black

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE
C0	新图面发行	13.01.08	LINEAR	1:1		
C1	增加PIN位规格	13.05.22	0.0±0.25	ANGLES		
C2	新增规格	15.01.23	0.00±0.15	X° REF±6°	APPROVED	1/23/2015
			0.000±0.08	X° ±3°	DESIGNER	伍文聪 15.01.23
				X° X'±2°	DRAWN	伍文聪 15.01.23

JCTC [®] <input type="checkbox"/> 苏州伟聚 <input type="checkbox"/> 东莞胜景 TERMINAL&CONNECTORS ■ 东莞胜蓝	PART. NO:	12012H00-2xNPA-L-HF	
	DWG. NO:	ENDE05	
	REV:	C2	SHEET: 1/1
	TITLE:	2.0mm PITCH HOUSING -- LOCK TYPE	