

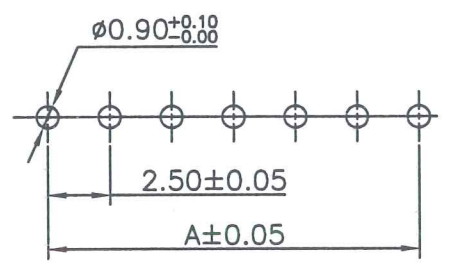
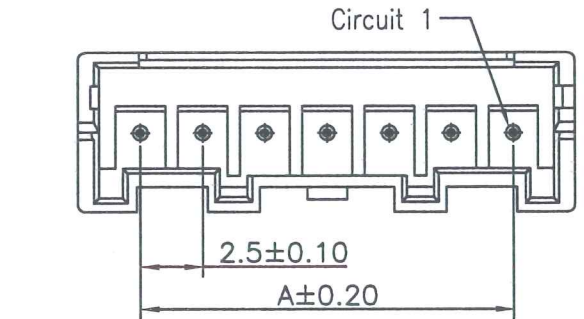
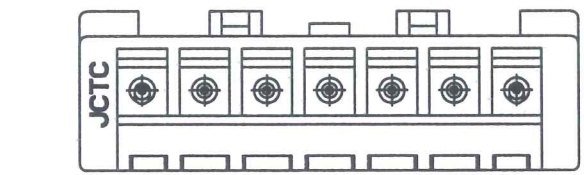
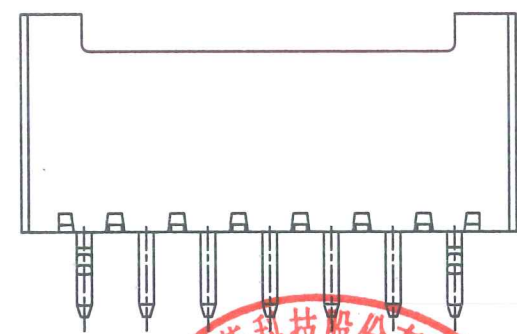


图号: 1

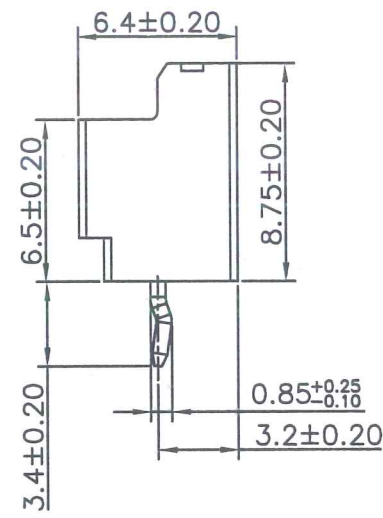

P.C.B. LAYOUT

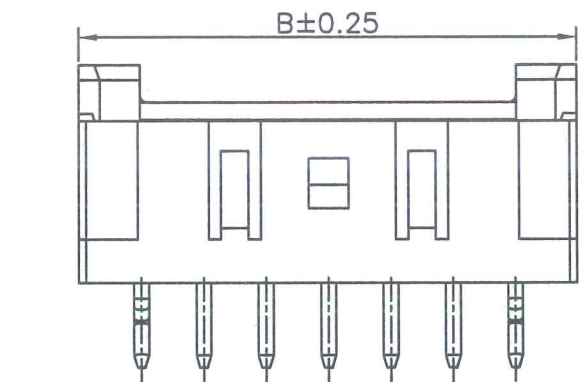


Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 10mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

12505W00-NP-H1

① ② ③ ④

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ H1 : High temperature plastic,UL94V-0



Circuits Part No	Dimensions	
	A	B
2P	--	7.50
3P	5.00	10.00
4P	7.50	12.50
5P	10.00	15.00
6P	12.50	17.50
7P	15.00	20.00
8P	17.50	22.50
9P	20.00	25.00
10P	22.50	27.50
11P	25.00	30.00
12P	27.50	32.50
13P	30.00	35.00
14P	32.50	37.50
15P	35.00	40.00



Part No.	Insulator	Contact	Color
12505W00-NP-H1	Nylon 9T,UL94V-0/无铅	Brass/Tin-plated	Natural

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART. NO.:	DWG. NO.:
C0	新图面发行	13. 12. 16	LINEAR	ANGLES	1:1	Nelson	21.04.14	12505W00-NP-H1	ENDE05
C1	更新公司名称	17. 03. 28	0.0±0.25	X° REF±6°	APPROVED	wn	21.04.14	TITLE: 2.50mm PITCH DIP TYPE WAFER	
C2	更新图框	21. 04. 14	0.00±0.15	X° ±3°	DESIGNER	JIA	21. 04. 14		
			0.000±0.08	X° X'±2°	DRAWN				

JCTC[®]
 TERMINAL&CONNECTORS

REV: C2 SHEET: 1/1