
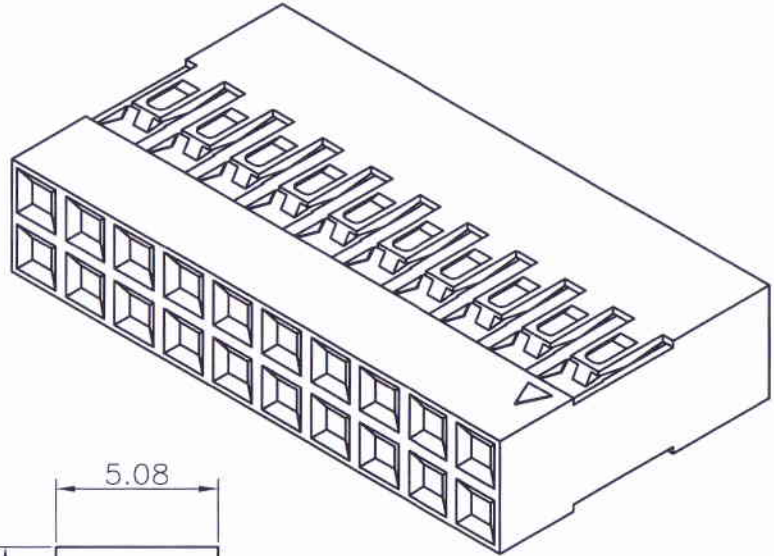


1 2 3 4 5 6 7 8

A

A

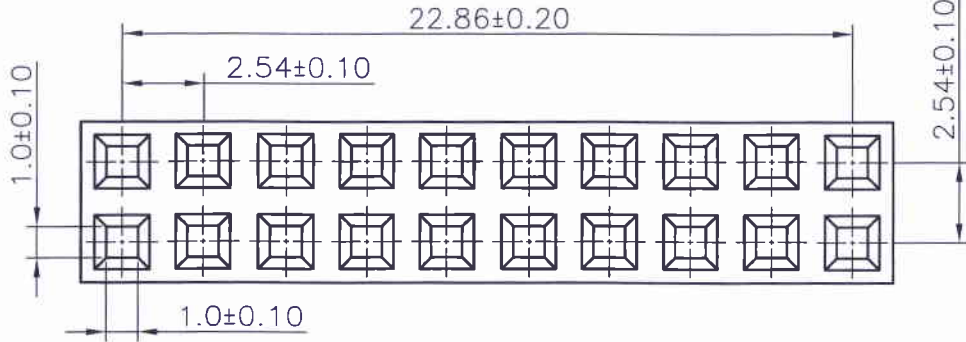

B



B

C

C

D

D

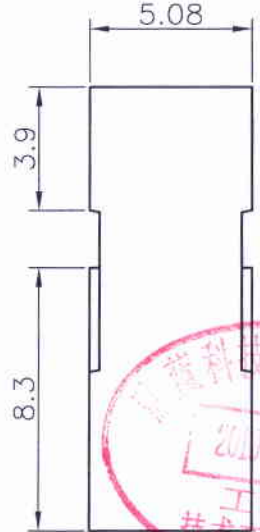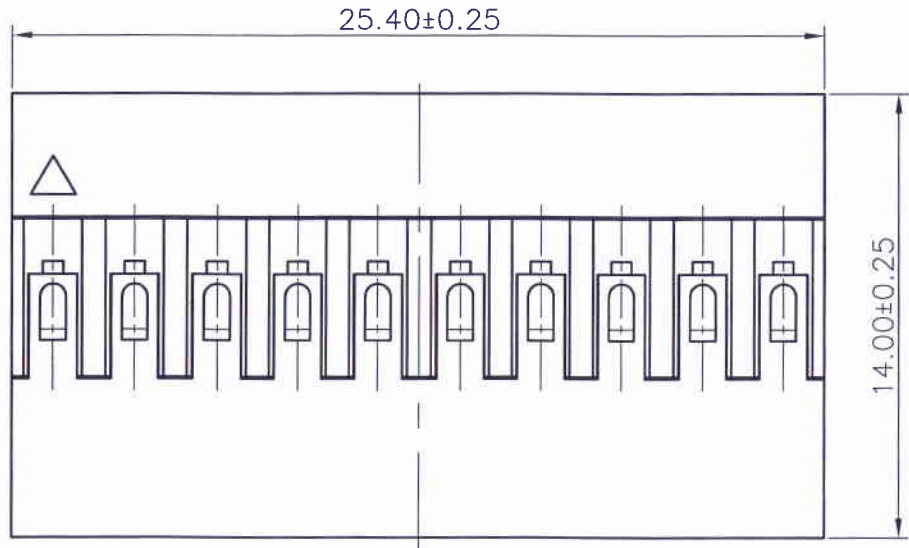

Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 Pitch Between Poles : 2.54mm
 The product using material and processing must conform to the *WI-PZ-142* HSF technical standard control requirements



12541H00-2x10PA-002

- ① Series No.
- ② H90 : Side Contact
- ③ No. of Circuits
- ④ A : Product color(A--Y)
- H00 : Up Contact
- Blank : Natural type

Suitable for JCTC 12541 series terminal △C1

Part No.	Material	Notes
12541H00-2x10PA-002	Nylon 66,UL 94V-0	黑色无卤

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO:	
C0	新图面发行	10.05.07		L. LINEAR	ANGLES	1:1 <th>APPROVED</th> <th>12541H00-2x10PA-002</th>				APPROVED	12541H00-2x10PA-002
C1	HR1911250282	19.11.25	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	伍文聪	19.11.25	DWG. NO:		ENDE05
			SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	伍文聪	19.11.25	TITLE:		DB 双排 2.54mm PITCH HOUSING
									REV:	C1	SHEET: 1/1

1 2 3 4 5 6 7 8

H

H