

1 2 3 4 5 6 7 8

A

B

C

D


E

F


G

H

Circuit 1

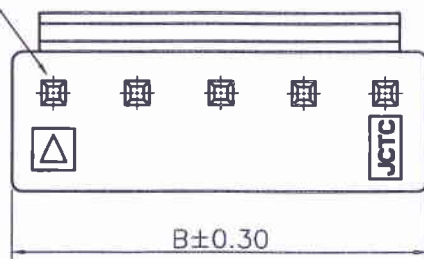

Conn. profile

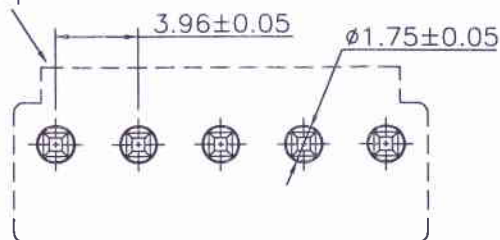

Recommended P.C.B Layout

Specifications:

Rated Voltage : 250V AC/DC

Rated Current : 7A AC,DC

Withstand Voltage : 1500V AC/minute

Contact Resistance : 10mΩ(MAX.)




Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -25°C~+85°C

Contact: Brass/Tin-plated

Material: HTN,UL94V-0 Halogen Free

The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

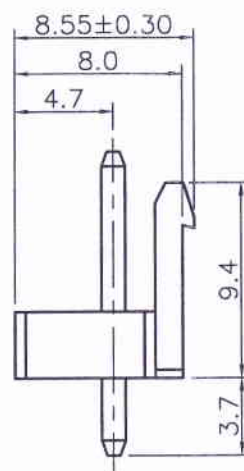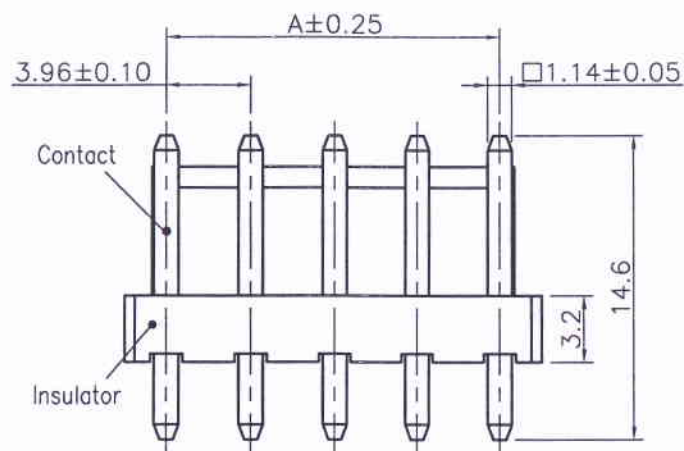

Circuit	Dimensions	
	A	B
2P	--	7.92
3P	7.92	11.88
4P	11.88	15.84
5P	15.84	19.80
6P	19.80	23.76
7P	23.76	27.72
8P	27.72	31.68
9P	31.68	35.64
10P	35.64	39.60
11P	39.60	43.56
12P	43.56	47.52
13P	47.52	51.48
14P	51.48	55.44
15P	55.44	59.40



Part No.	Material	Color
13962W00-NP-H1-HF	HTN,UL94V-0 Brass/Tin plated	Natural

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司		PART. NO:
A0	新图面发行	17.08.16	LINEAR	1:1	APPROVED	17.08.16			13962W00-NP-H1-HF
			0.0±0.25		DESIGNER	17.08.16	TITLE: 3.96mm Pitch Dip Type 180° Wafer		DWG. NO:
			0.00±0.15		DRAWN	17.08.16			ENDE05
			0.000±0.08						REV: A0 SHEET: 1/1

1 2 3 4 5 6 7 8