

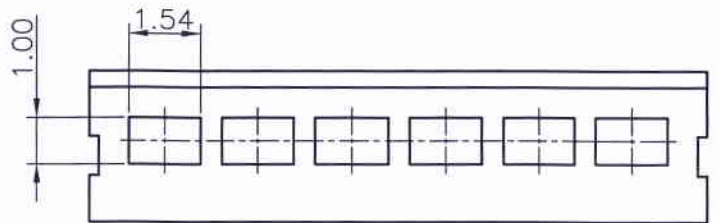
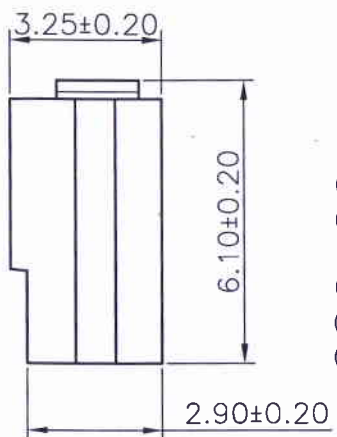
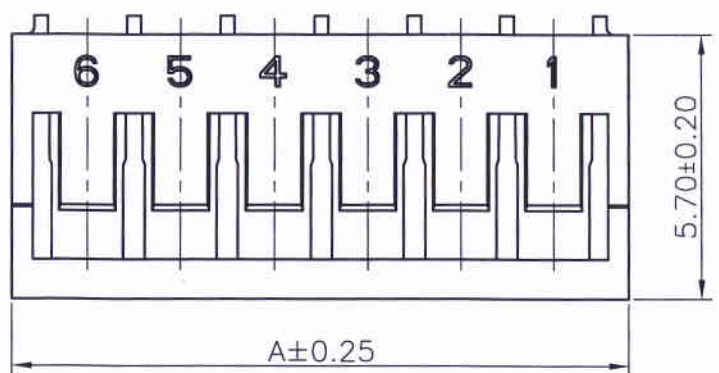
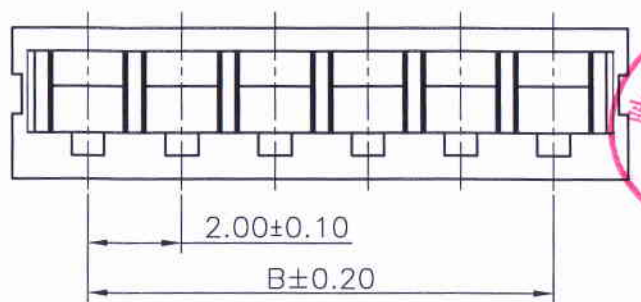


RoHS

Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 2A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C

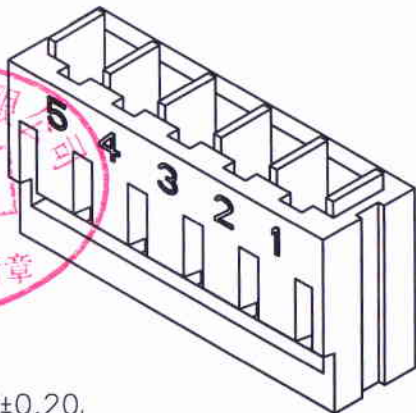

22001H00-NP-S1-HF
 ① ② ③ ④ ⑤

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ S1 : S1 Type
- ⑤ HF : Halogen Free

| Circuits No. | Dimensions | |
|--------------|------------|-------|
| | A | B |
| 2P | 5.30 | 2.00 |
| 3P | 7.30 | 4.00 |
| 4P | 9.30 | 6.00 |
| 5P | 11.30 | 8.00 |
| 6P | 13.30 | 10.00 |
| 7P | 15.30 | 12.00 |
| 8P | 17.30 | 14.00 |
| 9P | 19.30 | 16.00 |
| 10P | 21.30 | 18.00 |
| 11P | 23.30 | 20.00 |
| 12P | 25.30 | 22.00 |
| 13P | 27.30 | 24.00 |
| 14P | 29.30 | 26.00 |
| 15P | 31.30 | 28.00 |
| 16P | 33.30 | 30.00 |
| 17P | 35.30 | 32.00 |
| 18P | 37.30 | 34.00 |
| 19P | 39.30 | 36.00 |
| 20P | 41.30 | 38.00 |

Suitable for JCTC 22001 series terminal

| Part No. | Material | Color |
|-------------------|------------------|-------|
| 22001H00-NP-S1 | Nylon 66,UL94V-0 | 本色 |
| 22001H00-NP-S1-HF | Nylon 66,UL94V-0 | 无卤材料 |

22001H00-17P-S1-HF 料号

| REV. | REVISION RECORD | DATE | GENERAL TOLERANCES | SCALE: | NAME | DATE | PART. NO: 22001H00-NP-S1-XX |
|------|-----------------|----------|--------------------|-----------|----------|----------|------------------------------------|
| C1 | TR1007080041 | 10.07.08 | LINEAR | 1:1 | | | |
| C2 | HN1107190111 | 11.07.19 | ANGLES | APPROVED | 伍文聪 | 17.05.10 | |
| C3 | HN1103280018 | 12.03.28 | 0.0±0.25 | X° REF±6° | DESIGNER | | TITLE: SAN 2.00mm PITCH HOUSING |
| C4 | HR1705020052 | 17.05.10 | 0.00±0.15 | X° ±3° | DRAWN | 伍文聪 | |
| | | | 0.000±0.08 | X° X'±2° | | | REV: C4 SHEET: 1/1 |

JCTC 胜蓝科技股份有限公司
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司