







RoHS

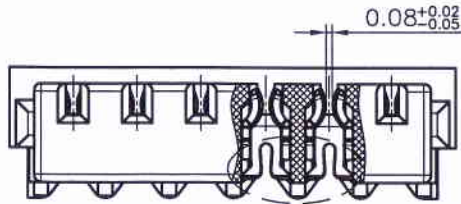

SECTION: A-A

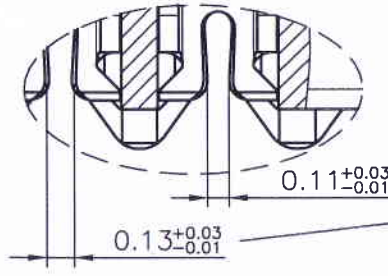

SEC: A-A
SCALE: 2.5:1

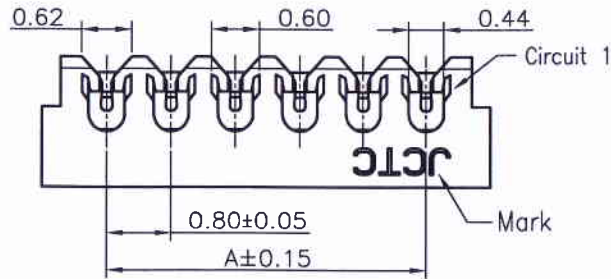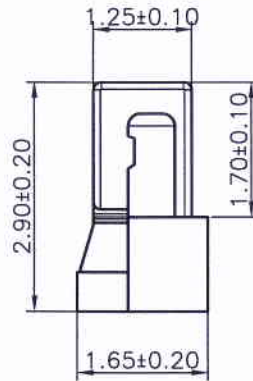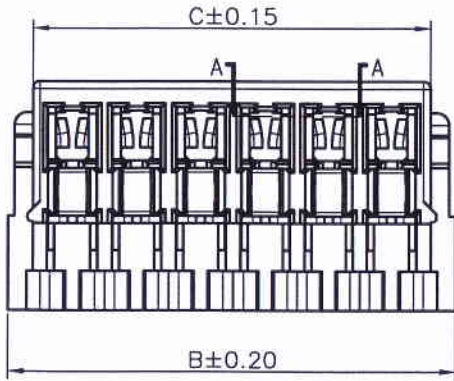

Specifications:
 Rated Voltage : 30V AC/DC
 Rated Current : 0.5A AC/DC
 Withstand Voltage : 200V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 Applicable Wire: AWG #34
 Insulation O.D.: 0.32mm

Dimensional Ordering Information:			
Circuits Part No	Dimensions		
	A	B	C
2P	0.80	2.40	1.78
3P	1.60	3.20	2.58
4P	2.40	4.00	3.38
5P	3.20	4.80	4.18
6P	4.00	5.60	4.98
7P	4.80	6.40	5.78
8P	5.60	7.20	6.58
9P	6.40	8.00	7.38
10P	7.20	8.80	8.18
11P	8.00	9.60	8.98

50801H00-NP-HF-34
 ① ② ③ ④ ⑤

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ HF : Halogen Free
- ⑤ 34 : AWG #34



Part No.	Material	Color	Terminal Material
50801H00-NP-HF-34	Nylon 66,UL94V-0	Natural(White)	Phosphor Bronze/Tin-plated

REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	JCTC® 胜蓝科技股份有限公司	PART NO:
C0	换图框发行	10.11.08			LINEAR				TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	50801H00-NP-HF-34
C1	变更公司名称	17.03.20			ANGLES					DWG NO:
					0.0±0.25	X° REF±6°				ENDE05
					0.00±0.15	X° ±3°				REV: C1
					0.00±0.08	X° X'±2°				SHEET: 1/1
							DESIGNER	17.03.20	TITLE:	
							DRAWN	卢小锋	JST0.8 刺破0.80mm PITCH HOUSING	