

1

2

3

4

5


6

7


8

A

A

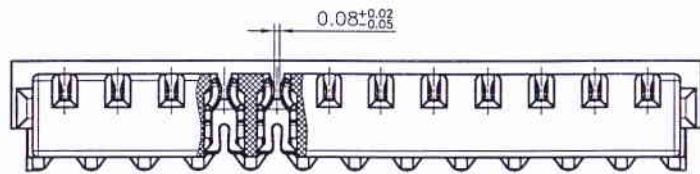

SECTION: A-A

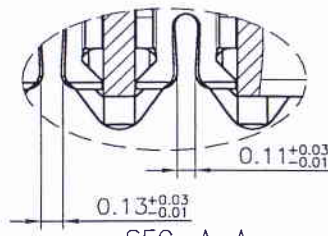

SEC: A-A
SCALE: 2.5:1

Specifications:

Rated Voltage : 30V AC/DC

Rated Current : 0.5A AC,DC

Withstand Voltage : 200V AC/minute

Contact Resistance : 30mΩ(MAX.)

Insulation Resistance : 100MΩ(MIN.)

Temperature Range : -25°C~+85°C

Applicable Wire: AWG #34

Insulation O.D.: 0.32mm



The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

B

B

C

C

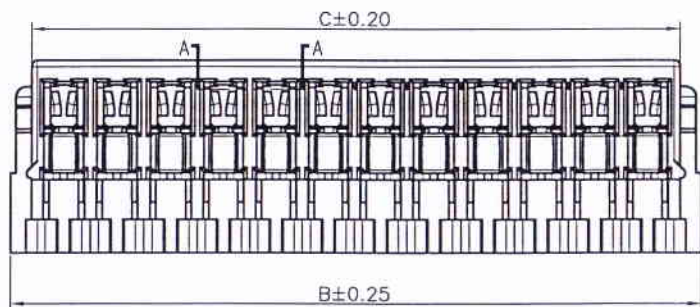


50801H00-NPX-5G-HF-34-S4

① ② ③④⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
A : Black type
- ⑤ 5G : Gold-plated 15u"
- ⑥ HF : Halogen Free
- ⑦ 34 : AWG #34
- ⑧ S4 : S4 Type

E

E

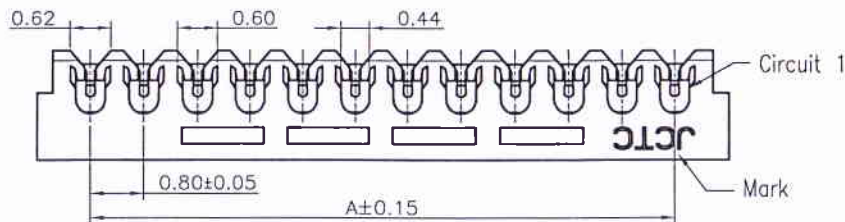

Dimensional Ordering Information:			
Circuits	Dimensions		
Part No	A	B	C
12P	8.80	11.20	9.78
14P	10.40	12.80	11.38

F

F

G

G

Part No.	Material	Color	Terminal Material
50801H00-NP-5G-HF-34-S4	Nylon 66,UL94V-0	Natural(White)	Phosphor Bronze/Gold-plated 15u"
50801H00-NPA-5G-HF-34-S4	Nylon 66,UL94V-0	Black	Phosphor Bronze/Gold-plated 15u"

H

H

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO.:
AO	新图面发行	17.12.01	LINEAR 0.0±0.25	1:1	APPROVED			
			ANGLES X° REF±6°		DESIGNER			DWG. NO.:
			0.00±0.15		DRAWN			ENDE05
			X° ±3°					REV: AO SHEET: 1/1
			UNIT: MM					
			SIZE: A4					
			0.000±0.08					
			X° X'±2°					

1

2

3

4

5

6

7

8