

50801W00-NPX-S-NC-S1-R
① ② ③④⑤⑥ ⑦ ⑧

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ A : Product color(A--Y)
Blank : Natural type
- ⑤ S: SMT Type
- ⑥ NC: No Cap
- ⑦ S1 : S1 Type
- ⑧ R : Reel pack





Specifications:
 Rated Voltage : 30V AC/DC
 Rated Current : 0.5A AC,DC
 Withstand Voltage : 200V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements



Dimensional Ordering Information:			
Circuits Part No	Dimensions		
	A	B	C
5P	3.20	4.30	6.20

Part No.	Material	Color	Pin Material	Solder Tabs
50801W00-5P-S-NC-S1-R	Nylon 6T,UL94V-0	Beige	Phosphor Bronze/Matte Tin-plated	Brass/Matte Tin-plated

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART NO:
A0	新图面发行	17.12.13	LINEAR ANGLES	1:1				50801W00-NPX-S-NC-S1-R
			0.0±0.25 X° REF±6°	APPROVED				DWG. NO:
			0.00±0.15 X° ±3°	DESIGNER	卢小锋	17.12.13		ENDE05
			0.000±0.08 X° X'±2°	DRAWN	卢小锋	17.12.13		REV: A0 SHEET: 1/2
							TITLE:	0.8刺破 180° WAFER CONN

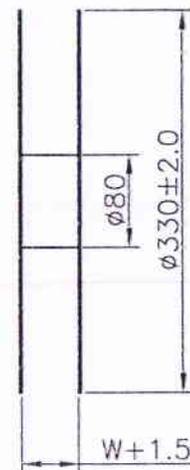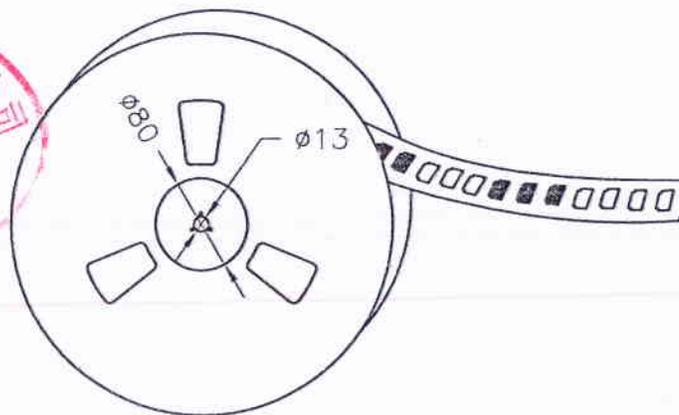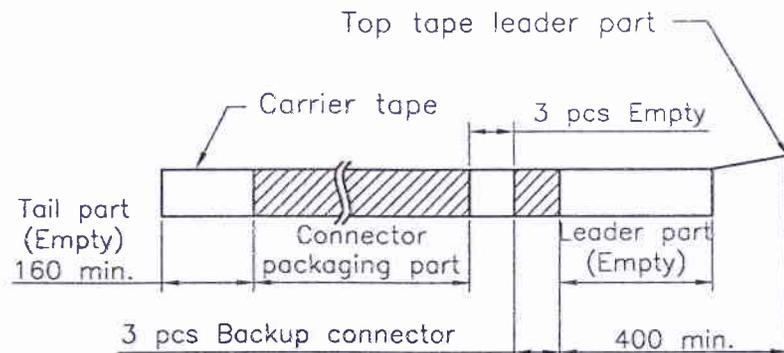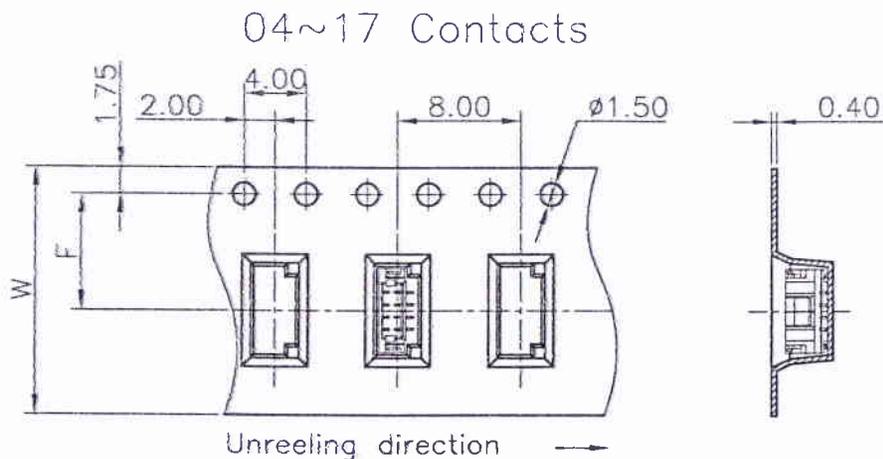

NOTE:
Material: Transparent
Anti-static Polystyrene.

Number of Contacts	W±0.3	F±0.1	Q'ty/Reel
05P	16	7.50	2,000

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE:	NAME	DATE	JGTC ® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO:
A0	新图面发行	17.12.13		0.00±0.15	X° REF±6°	1:1	APPROVED			
			0.00±0.15	X° ±3°		DESIGNER	卢小锋	17.12.13		DWG. NO:
			0.000±0.08	X° X'±2°		DRAWN				ENDE05
										REV: A0 SHEET: 2/2