




The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

Specifications:
 Current Rating : 2A AC,DC
 Rated Voltage : 125V AC/DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Temperature Range: -25°C ~ +85°C

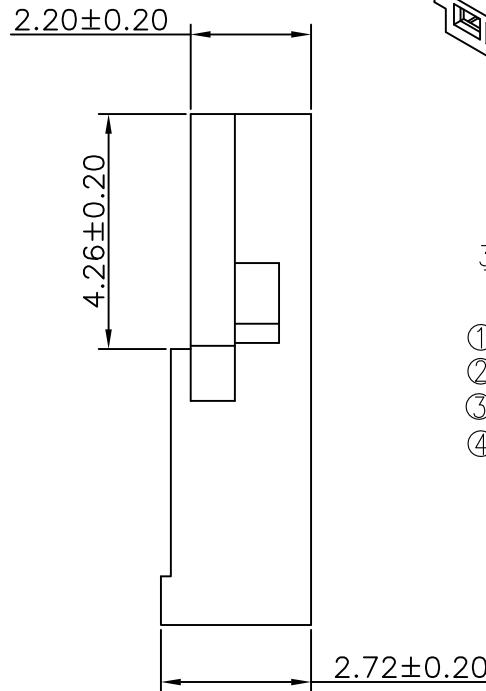

PIN	DIM. (mm)		
	A	B	C
02	2.00	4.60	6.60
03	4.00	6.60	8.60
04	6.00	8.60	10.60
05	8.00	10.60	12.60
06	10.00	12.60	14.60
07	12.00	14.60	16.60
08	14.00	16.60	18.60
09	16.00	18.60	20.60
10	18.00	20.60	22.60
11	20.00	22.60	24.60
12	22.00	24.60	26.60
13	24.00	26.60	28.60
14	26.00	28.60	30.60
15	28.00	30.60	32.60
16	30.00	32.60	34.60

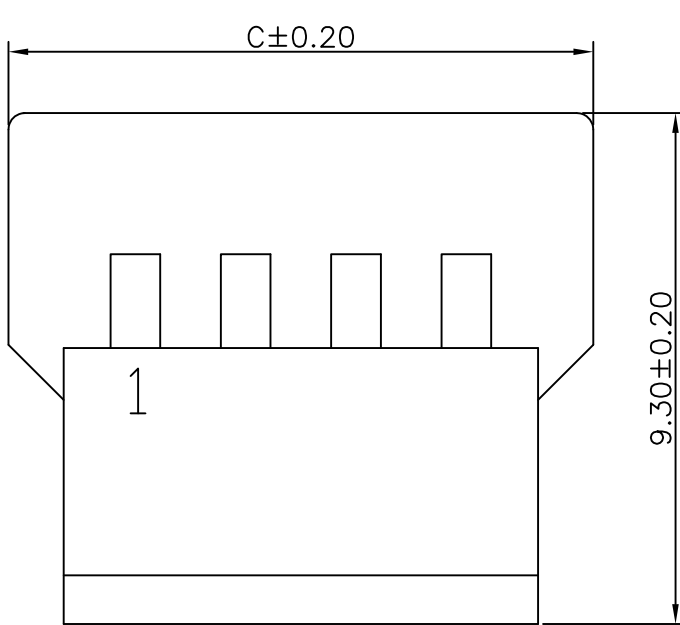

32001HF0-NP-W3
 ① ② ③ ④

- ① Series No.
- ② HF0 : Female
- ③ No. of Circuits
- ④ W3: W3 Type

Part No.	Material	Color
32001HF0-NP-W3	PBT,UL94V-0	Natural(White)

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO: 32001HF0-NP-W3	DWG. NO: ENDE05	 TERMINAL&CONNECTORS
C0	新图面发行	2013. 09. 17		LINEAR	ANGLES	APPROVED					
C1	更新图框发行	2021. 05. 08	0. 0±0. 25	X° REF±6°	DESIGNER	TITLE: 2. 00mm pitch Female Housing	REV: C1	SHEET: 1/1			
			UNIT: MM	0. 00±0. 15	X° ±3°	DRAWN					
			SIZE: A4	0. 000±0. 08	X° X'±2°						