
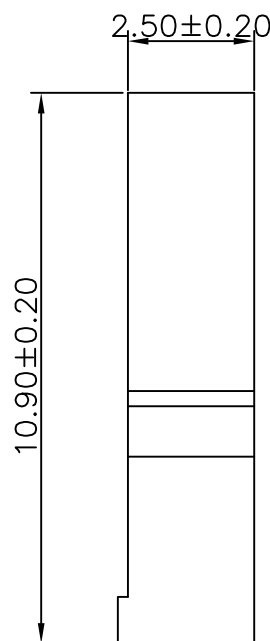
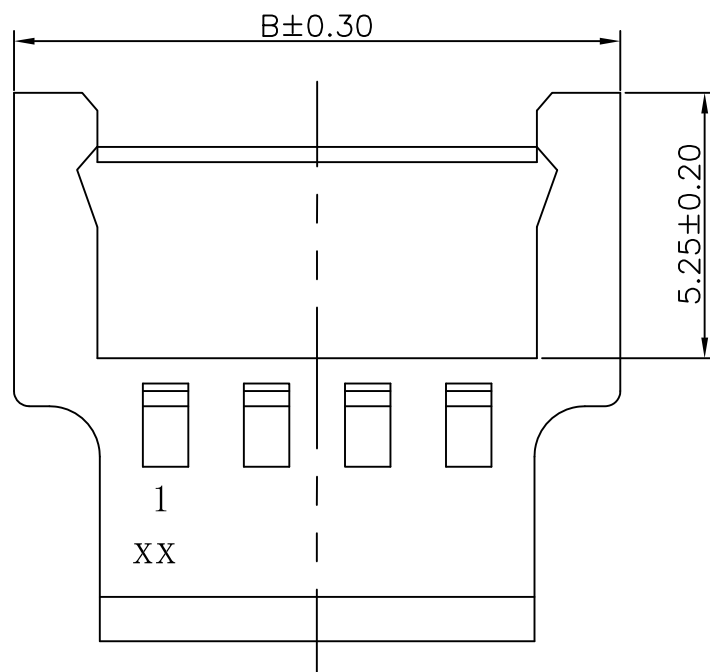
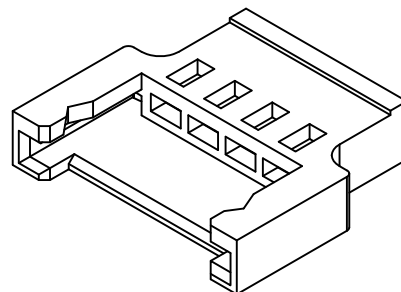


The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

Specifications:
 Current Rating : 2A AC,DC
 Rated Voltage : 125V AC/DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Temperature Range: -25°C ~ +85°C

Dimensional Ordering Information

Part No	A	B
2P	--	8.10
3P	4.00	10.10
4P	6.00	12.10
5P	8.00	14.10
6P	10.00	16.10
7P	12.00	18.10
8P	14.00	20.10
9P	16.00	22.10
10P	18.00	24.10
11P	20.00	26.10
12P	22.00	28.10
13P	24.00	30.10
14P	26.00	32.10
15P	28.00	34.10
16P	30.00	36.10

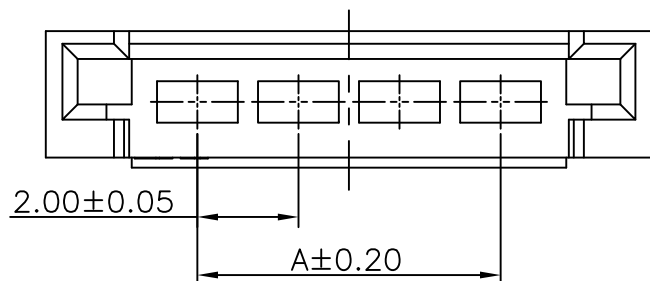

32001HMO-NP-W3

① ② ③ ④

- ① Series No.
- ② HMO: male
- ③ No: of Circuits
- ④ W3: W3 Type

Part No.	Material	Color
32001HMO-NP-W3	PBT,UL 94V-0	Natural(White)

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO: 32001HMO-NP-W3	DWG. NO: ENDE05	 TERMINAL&CONNECTORS
C0	新图面发行	13. 09. 17		LINEAR	ANGLES	APPROVED					
C1	更新图框发行	21. 05. 08	0. 00±0. 25	X° REF±6°	DESIGNER	TITLE: 2. 00mm pitch Male Housing	REV: C1	SHEET: 1/1			
			UNIT: MM	0. 00±0. 15	X° ±3°	DRAWN					
			SIZE: A4	0. 000±0. 08	X° X'±2°						