

Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 5A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 10mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

33001H00-2xNPX-F-HF-NK
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② H00: Up Contact
- ③ No. of Circuits
- ④ X: Product color (A--Y)
Blank: Natural type
A: Black
- ⑤ F: F Type
- ⑥ HF: Halogen Free
- ⑦ NK: No. Mark

Circuits Part No	Dimensions	
	A	B
2x1P	--	3.85
2x2P	3.00	6.85
2x3P	6.00	9.85
2x4P	9.00	12.85
2x5P	12.00	15.85
2x6P	15.00	18.85
2x7P	18.00	21.85
2x8P	21.00	24.85
2x9P	24.00	27.85
2x10P	27.00	30.85
2x11P	30.00	33.85
2x12P	33.00	36.85





Part No.	Material	Color
33001H00-2xNPA-F-HF-NK	Nylon 66,UL94V-0	Black

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE
A0	新图面发行	19.04.20	LINER 0.0±0.25	1:1	APPROVED	19.09.24
			ANGLES 0.00±0.15		DESIGNER	
			0.00±0.08		DRAWN	

PART. NO.	DWG. NO.	REV.	SHEET:
33001H00-2xNPX-F-HF-NK	ENDE05	A0	1/2

JGTC® 胜蓝科技股份有限公司
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司
 TITLE: 3.00mm PITCH HOUSING (双排)

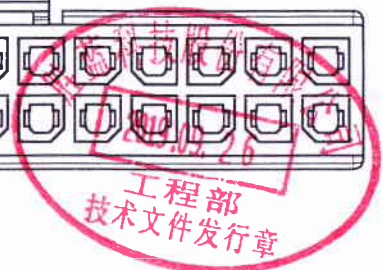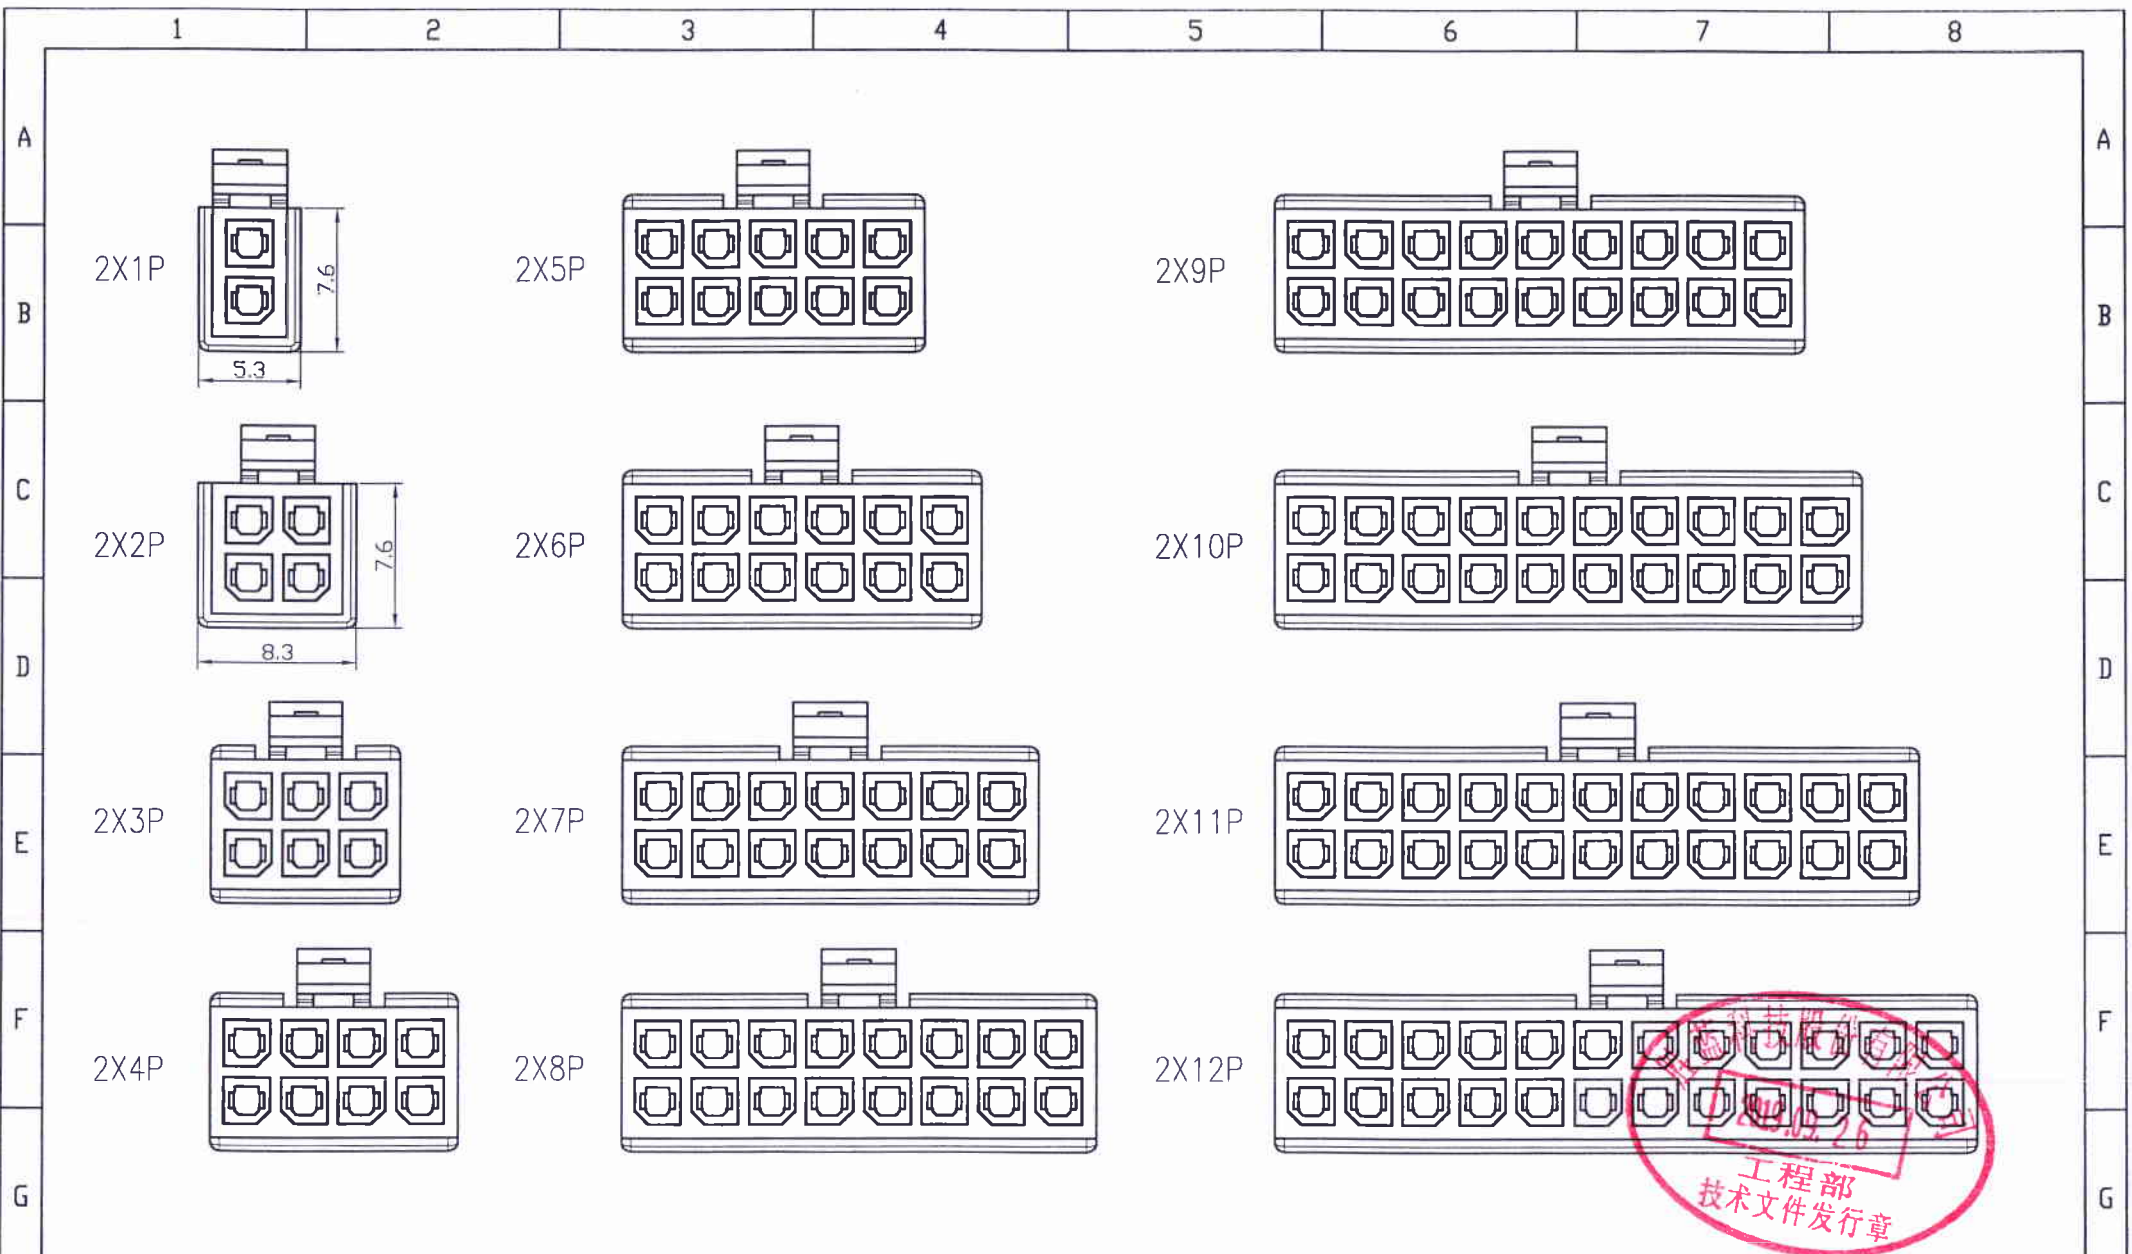

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	JCTC ® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO:
A0	新图面发行	19.04.20		LINEAR	ANGLES	1:1	APPROVED			
			UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	伍文聪	19.09.24		DWG. NO:
			SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	伍文聪	19.04.20	TITLE: 3.00mm PITCH HOUSING (双排)	ENDE05
										REV: A0 SHEET: 2/2