





RoHS

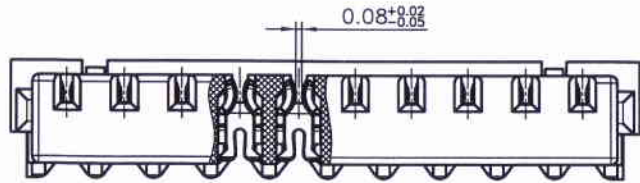

SECTION: A-A


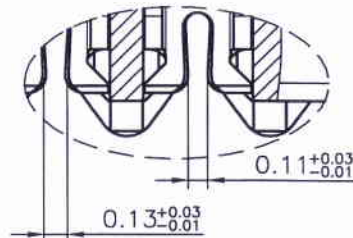


SEC: A-A
SCALE: 2.5:1

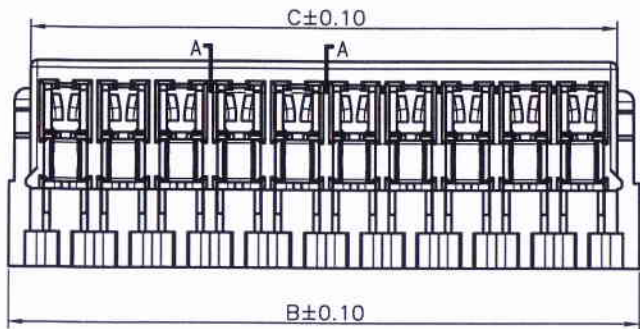

Specifications:
 Rated Voltage : 30V AC/DC
 Rated Current : 0.5A AC,DC
 Withstand Voltage : 200V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 Applicable Wire: AWG #34
 Insulation O.D.: 0.32mm

Dimensional Ordering Information:			
Circuits Part No	Dimensions		
	A	B	C
2P	0.80	2.40	1.78
3P	1.60	3.20	2.58
4P	2.40	4.00	3.38
5P	3.20	4.80	4.18
6P	4.00	5.60	4.98
7P	4.80	6.40	5.78
8P	5.60	7.20	6.58
9P	6.40	8.00	7.38
10P	7.20	8.80	8.18
11P	8.00	9.60	8.98

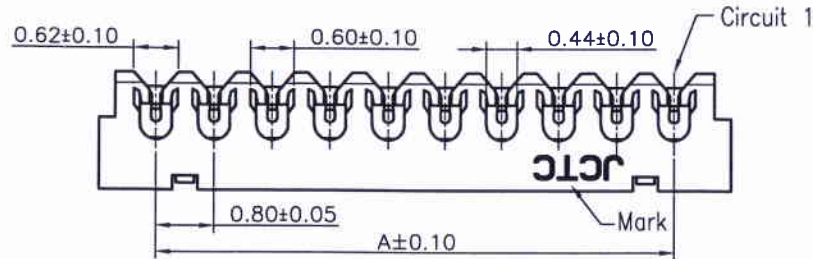

DETAIL "A"
SCALE: 2:1

50801H00-NP-5A-HF-34-S5

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ 5A : Gold-flash
- ⑤ HF : Halogen Free
- ⑥ 34 : AWG #34
- ⑦ S5 : S5 Type

Part No.	Material	Color	Terminal Material
50801H00-NP-5A-HF-34-S5	Nylon 66,UL94V-0	Natural(White)	Phosphor Bronze/Gold-flash

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO: 50801H00-NP-5A-HF-34-S5
C0	换图框发行	13. 12. 04	LINEAR	1:1	APPROVED		
C1	变更公司名称	17. 03. 20	0.0±0.25	X° REF±6°	DESIGNER		
			UNIT: MM	0.00±0.15	X° ±3°	TITLE:	REV: C1 SHEET: 1/1
			SIZE: A4	0.000±0.08	X° X'±2°	JST0.8刺破 0.80mm PITCH HOUSING	

1

2

3

4

5

6

7

8