




RoHS

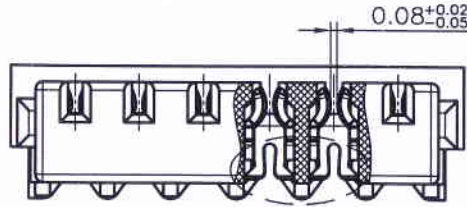

SECTION: A-A



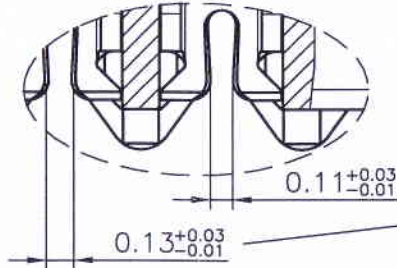


SEC: A-A  
SCALE: 2.5:1



Specifications:  
 Rated Voltage : 30V AC/DC  
 Rated Current : 0.5G AC,DC  
 Withstand Voltage : 200V AC/minute  
 Contact Resistance : 30mΩ(MAX.)  
 Insulation Resistance : 100MΩ(MIN.)  
 Temperature Range : -25°C~+85°C  
 Applicable Wire: AWG #34  
 Insulation O.D.: 0.32mm

Dimensional Ordering Information:			
Circuits Part No	Dimensions		
	A	B	C
2P	0.80	2.40	1.78
3P	1.60	3.20	2.58
4P	2.40	4.00	3.38
5P	3.20	4.80	4.18
6P	4.00	5.60	4.98
7P	4.80	6.40	5.78
8P	5.60	7.20	6.58
9P	6.40	8.00	7.38
10P	7.20	8.80	8.18
11P	8.00	9.60	8.98

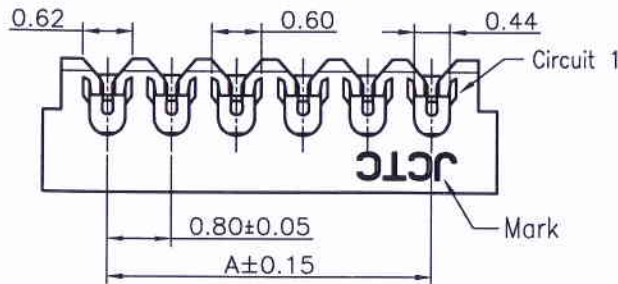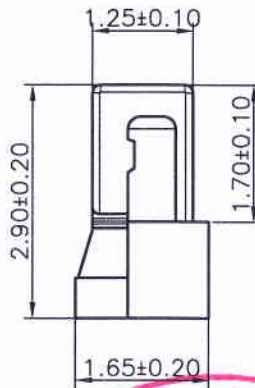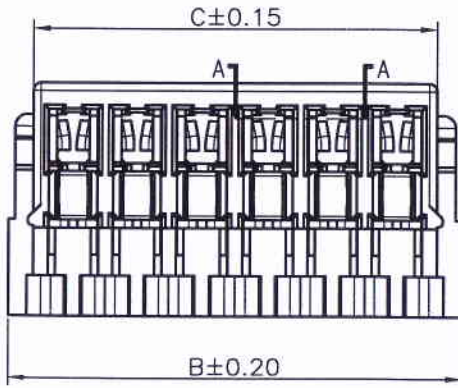

50801H00-NPX-5G-HF-34  
 ① ② ③④ ⑤ ⑥ ⑦

- ① Series No.
- ② H90 : Side Contact  
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)  
Blank : Natural type
- ⑤ 5G : Gold-plated 15u"
- ⑥ HF : Halogen Free
- ⑦ 34 : AWG #34



Part No.	Material	Color	Terminal Material
50801H00-NP-5G-HF-34	Nylon 66,UL94V-0	White	Phosphor Bronze/Gold-plated 15u"
50801H00-NPA-5G-HF-34	Nylon 66,UL94V-0	Black	Phosphor Bronze/Gold-plated 15u"

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO: 50801H00-NPX-5G-HF-34
A0	新图面发行	16.06.15	LINEAR	1:1			
A1	变更公司名称	17.03.20	0.0 ± 0.25	APPROVED			
			0.00 ± 0.15	DESIGNER			REV: A1 SHEET: 1/1
			0.000 ± 0.08	DRAWN	卢小锋	17.03.20	

**JCTC**® 胜蓝科技股份有限公司  
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司  
 TITLE: JST刺破 0.80mm PITCH HOUSING