




RoHS

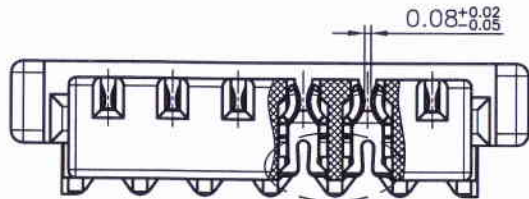

SECTION: A-A


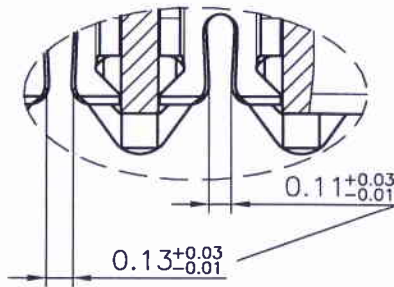


SEC: A-A
SCALE: 2.5:1



Specifications:
 Rated Voltage : 30V AC/DC
 Rated Current : 0.5A AC,DC
 Withstand Voltage : 200V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C


Dimensional Ordering Information:			
Circuits Part No	Dimensions		
	A	B	C
2P	0.80	3.20	1.78
3P	1.60	4.00	2.58
4P	2.40	4.80	3.38
5P	3.20	5.60	4.18
6P	4.00	6.40	4.98
7P	4.80	7.20	5.78
8P	5.60	8.00	6.58
9P	6.40	8.80	7.38
10P	7.20	9.60	8.18
11P	8.00	10.40	8.98

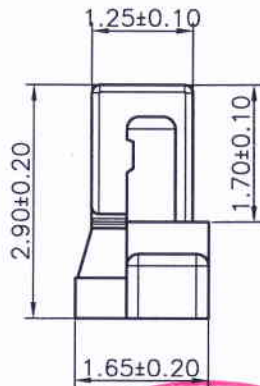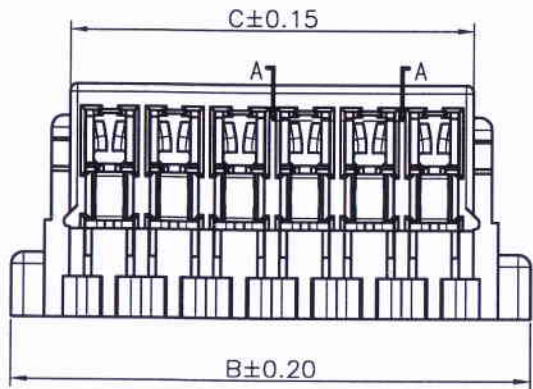

50801H00-NP-T-HF-34

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ T : Mount type
- ⑤ HF : Halogen Free
- ⑥ 34 : AWG #34

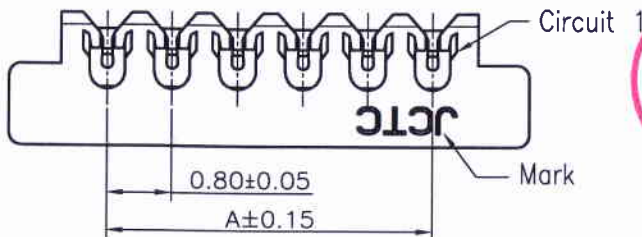

Applicable Wire: AWG #34(Insulation O.D.: 0.32mm)

Part No.	Material	Color	Terminal Material
50801H00-NP-T-HF-34	Nylon 66,UL94V-0	本色无齿	Phosphor Bronze/Tin-plated

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART NO:
CO	换图框发行	11.10.21	LINEAR	1:1	APPROVED			50801H00-NP-T-HF-34
C1	变更公司名称	17.03.20	0.0±0.25	X° REF±6°	DESIGNER			
			UNIT: MM	0.00±0.15	X° ±3°	DRAWN		DWG. NO:
			SIZE: A4	0.000±0.08	X° X'±2°			ENDE05
								REV: C1 SHEET: 1/1