






RoHS

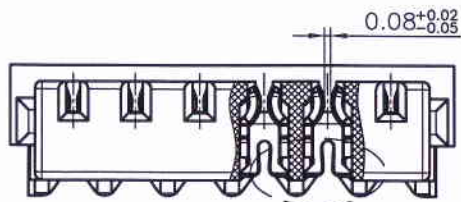

SECTION: A-A

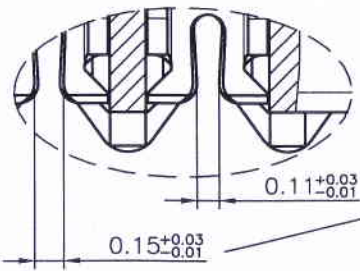

SEC: A-A
SCALE: 2.5:1

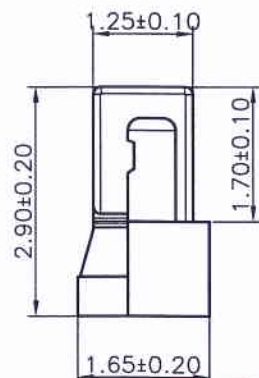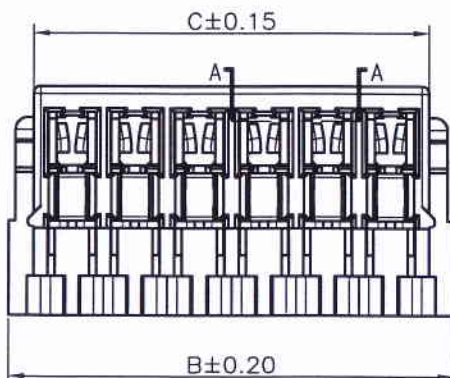


Specifications:
 Rated Voltage : 30V AC/DC
 Rated Current : 0.5A AC,DC
 Withstand Voltage : 200V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C

Dimensional Ordering Information:			
Circuits Part No	Dimensions		
	A	B	C
2P	0.80	2.40	1.78
3P	1.60	3.20	2.58
4P	2.40	4.00	3.38
5P	3.20	4.80	4.18
6P	4.00	5.60	4.98
7P	4.80	6.40	5.78
8P	5.60	7.20	6.58
9P	6.40	8.00	7.38
10P	7.20	8.80	8.18
11P	8.00	9.60	8.98

50801H00-NP-5G-HF

① ② ③ ④ ⑤

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ 5G : Gold-Plated
- ⑤ HF : Halogen Free

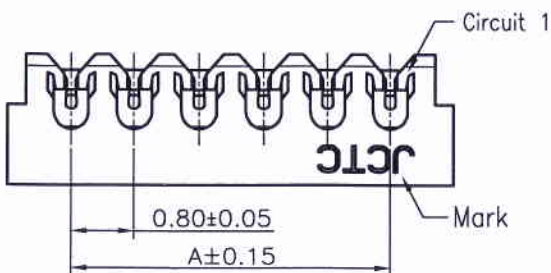

Applicable Wire: AWG #32(Insulation O.D.: 0.38mm)

Part No.	Material	Color	Terminal Material	备注
50801H00-NP-5G-HF	Nylon 66,UL94V-0	本色无卤	Phosphor Bronze/Gold-Plated	镀全金 15u"

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART NO: 50801H00-NP-5G-XX
C0	换图框发行	09.11.25	LINEAR	1:1			
C1	TN1007150042	10.07.15	0.0±0.25	APPROVED			
C2	TN1011080123	10.11.08	0.00±0.15	DESIGNER			
C3	变更公司名称	17.03.20	0.000±0.08	DRAWN	卢小锋	17.03.20	

JCTC 胜蓝科技股份有限公司
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司

TITLE:
 JST0.8 刺破0.80mm PITCH HOUSING

DWG. NO:	REV:	SHEET:
ENDE05	C3	1/1