




RoHS

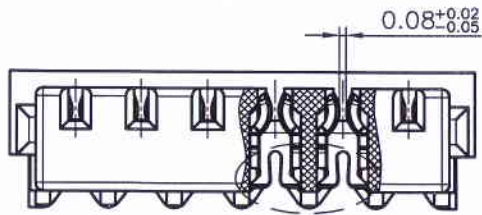

SECTION: A-A


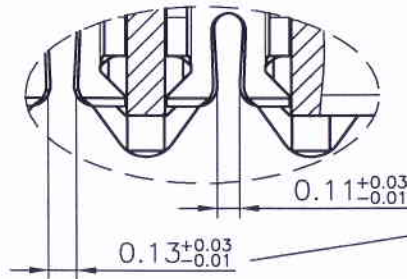


SEC: A-A
SCALE: 2.5:1




Specifications:
 Rated Voltage : 30V AC/DC
 Rated Current : 0.5A AC,DC
 Withstand Voltage : 200V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 Applicable Wire: AWG #34
 Insulation O.D.: 0.32mm

Dimensional Ordering Information:			
Circuits Part No	Dimensions		
	A	B	C
2P	0.80	2.40	1.78
3P	1.60	3.20	2.58
4P	2.40	4.00	3.38
5P	3.20	4.80	4.18
6P	4.00	5.60	4.98
7P	4.80	6.40	5.78
8P	5.60	7.20	6.58
9P	6.40	8.00	7.38
10P	7.20	8.80	8.18
11P	8.00	9.60	8.98

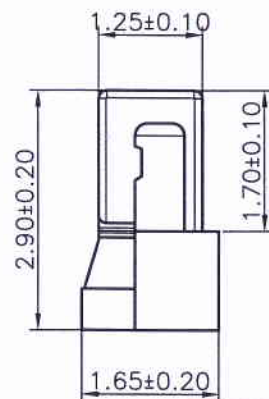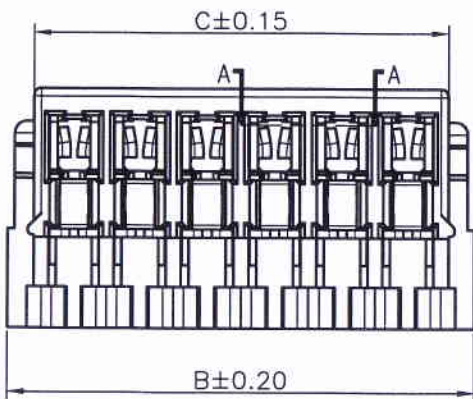

50801H00-NPX-5A-HF-34
 ① ② ③④ ⑤ ⑥ ⑦

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
Blank : Natural type
- ⑤ 5A : Gold-flash
- ⑥ HF : Halogen Free
- ⑦ 34 : AWG #34

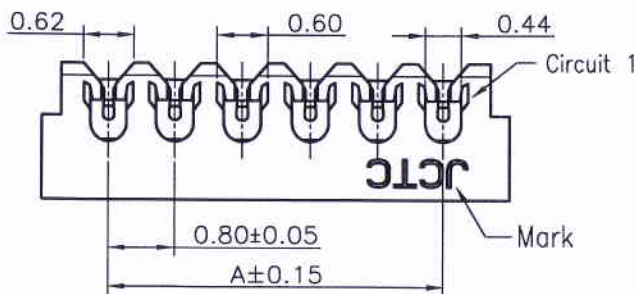

Part No.	Material	Color	Terminal Material
50801H00-NP-5A-HF-34	Nylon 66,UL94V-0	Natural(White)	Phosphor Bronze/Gold-flash
50801H00-NPA-5A-HF-34	Nylon 66,UL94V-0	Natural(Black)	Phosphor Bronze/Gold-flash

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO:
C0	换图框发行	10.12.17	L: 0.0±0.25	1:1	APPROVED			50801H00-NPX-5A-HF-34
C1	HN1311250201	13.11.25	ANGLES: X° REF±6°	DESIGNER		DWG. NO:		
C2	变更公司名称	17.03.20	X° ±3°	DRAWN	卢小锋	17.03.20	ENDE05	
			UNIT: MM	0.00±0.15			TITLE:	REV: C2
			SIZE: A4	0.000±0.08			JST0.8 刺破0.80mm PITCH HOUSING	SHEET: 1/1