







RoHS

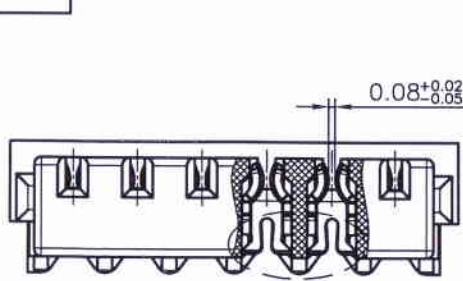

SECTION: A-A

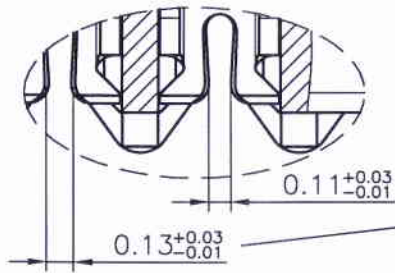

SEC: A-A  
SCALE: 2.5:1

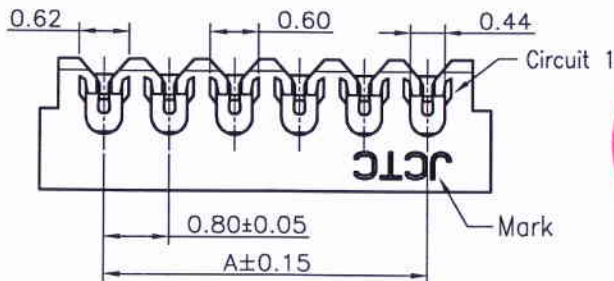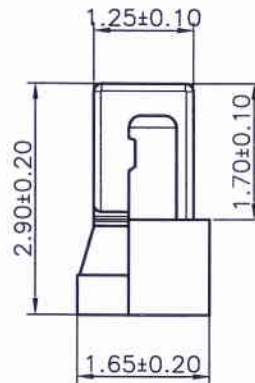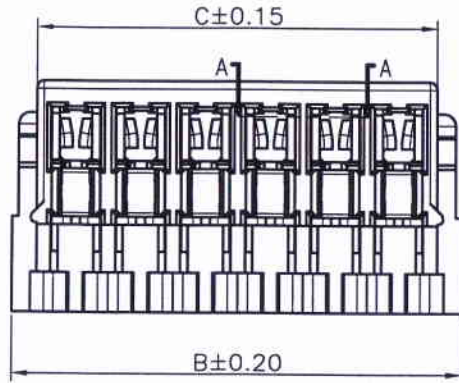

Specifications:  
 Rated Voltage : 30V AC/DC  
 Rated Current : 0.5A AC,DC  
 Withstand Voltage : 200V AC/minute  
 Contact Resistance : 30mΩ(MAX.)  
 Insulation Resistance : 100MΩ(MIN.)  
 Temperature Range : -25°C~+85°C  
 Applicable Wire: AWG #34  
 Insulation O.D.: 0.32mm

Dimensional Ordering Information:			
Circuits Part No	Dimensions		
	A	B	C
2P	0.80	2.40	1.78
3P	1.60	3.20	2.58
4P	2.40	4.00	3.38
5P	3.20	4.80	4.18
6P	4.00	5.60	4.98
7P	4.80	6.40	5.78
8P	5.60	7.20	6.58
9P	6.40	8.00	7.38
10P	7.20	8.80	8.18
11P	8.00	9.60	8.98

50801H00-NP-5A-34

① ② ③ ④ ⑤

- ① Series No.
- ② H90 : Side Contact  
H00 : Up Contact
- ③ No. of Circuits
- ④ 5A : Gold-flash
- ⑤ 34 : AWG #34



Part No.	Material	Color	Terminal Material
50801H00-NP-5A-34	Nylon 46,UL94V-0	Natural(White)	Phosphor Bronze/Gold-flash

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO: 50801H00-NP-5A-34
CO	换图框发行	10.11.08	LINEAR	1:1			
C1	变更公司名称	17.03.20	ANGLES	APPROVED			
			0.0±0.25	DESIGNER			
			X° REF±6°	DRAWN			
			UNIT: MM				
			0.00±0.15				
			SIZE: A4				
			0.000±0.08				
			X° X'±2°				

**JCTC** 胜蓝科技股份有限公司  
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司  
 TITLE: JST0.8 刺破0.80mm PITCH HOUSING

DWG. NO:	REV:	SHEET:
ENDE05	C1	1/1