



RoHS

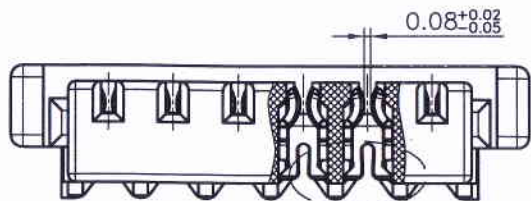



SECTION: A-A

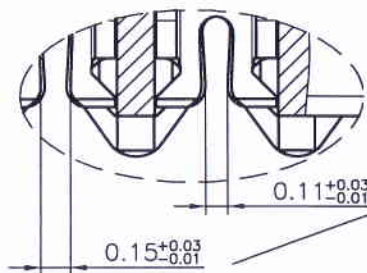

SEC: A-A
SCALE: 2.5:1

Specifications:
 Rated Voltage : 30V AC/DC
 Rated Current : 0.5A AC,DC
 Withstand Voltage : 200V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C


Dimensional Ordering Information:			
Circuits Part No	Dimensions		
	A	B	C
2P	0.80	3.20	1.78
3P	1.60	4.00	2.58
4P	2.40	4.80	3.38
5P	3.20	5.60	4.18
6P	4.00	6.40	4.98
7P	4.80	7.20	5.78
8P	5.60	8.00	6.58
9P	6.40	8.80	7.38
10P	7.20	9.60	8.18
11P	8.00	10.40	8.98

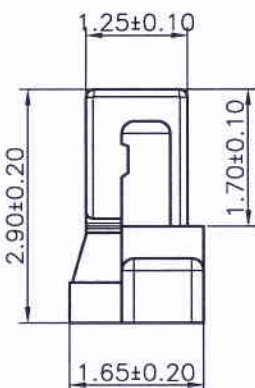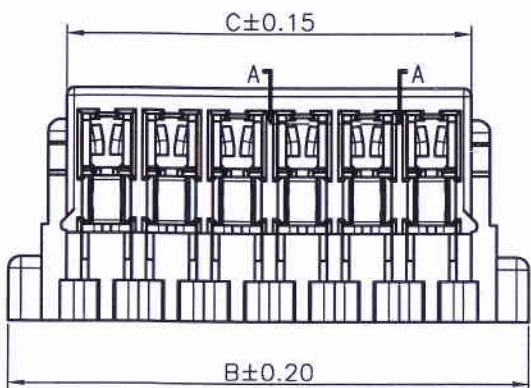

50801H00-NPA-T5A-HF

① ② ③④⑤⑥⑦

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ A : Product color(A--Y)
Blank : Natural type
- ⑤ T : Mount type
- ⑥ 5A : Gold-flash
- ⑦ HF : Halogen Free

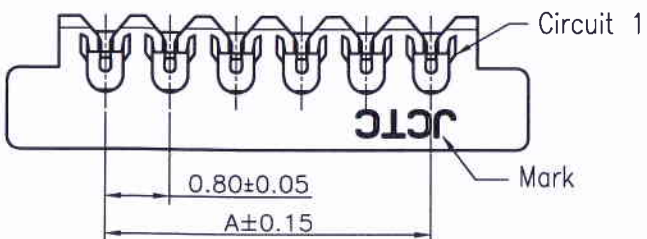

Applicable Wire: AWG #32(Insulation O.D.: 0.38mm)

Part No.	Material	Color	Terminal Material	备注
50801H00-NP-T5A	Nylon 46,UL94V-0	本色	Phosphor Bronze/Gold-flash	镀全金1u''
50801H00-NP-T5A-HF	Nylon 66,UL94V-0	本色无卤	Phosphor Bronze/Gold-flash	镀全金1u''
50801H00-NPA-T5A-HF	Nylon 66,UL94V-0	黑色无卤	Phosphor Bronze/Gold-flash	镀全金1u''

REV.	REVISION RECORD	DATE	UNIT	SIZE	GENERAL TOLERANCES	SCALE:	NAME	DATE	TITLE:	PART. NO:	
C1	新增黑色无卤规格	10.06.05	MM	M4	LINEAR	1:1	[Signature]	17.03.20	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	50801H00-NPX-T5A-XX	
C2	TN1007150042	10.07.15			ANGLES	APPROVED					
C3	TN1011080123	10.11.08			0.00±0.15	X° REF±6°					DESIGNER
C4	变更公司名称	17.03.20			0.000±0.08	X° X'±2°					DRAWN
										DWG. NO:	
										ENDE05	
										REV: C4	
										SHEET: 1/1	