




RoHS

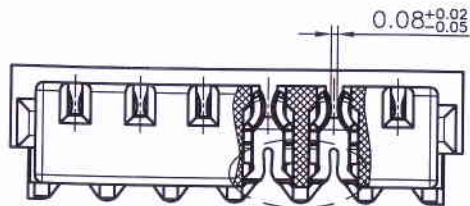

SECTION: A-A



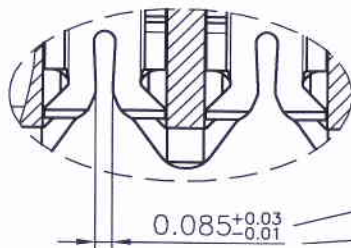


SEC: A-A
SCALE: 2.5:1



Specifications:
 Rated Voltage : 30V AC/DC
 Rated Current : 0.5A AC,DC
 Withstand Voltage : 200V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 Applicable Wire: AWG #36
 Insulation O.D.: 0.29mm

Dimensional Ordering Information:			
Circuits Part No	Dimensions		
	A	B	C
2P	0.80	2.40	1.78
3P	1.60	3.20	2.58
4P	2.40	4.00	3.38
5P	3.20	4.80	4.18
6P	4.00	5.60	4.98
7P	4.80	6.40	5.78
8P	5.60	7.20	6.58
9P	6.40	8.00	7.38
10P	7.20	8.80	8.18
11P	8.00	9.60	8.98

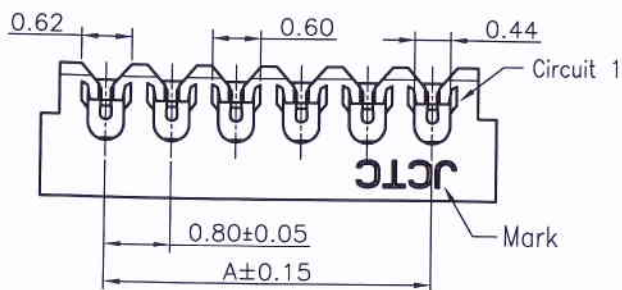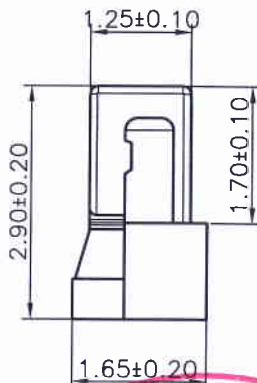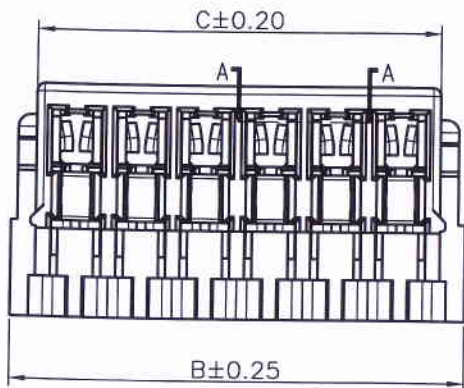

50801H00-NPX-5A-HF-36

① ② ③④ ⑤ ⑥ ⑦

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
Blank : Natural type
- ⑤ 5A : Gold-flash
- ⑥ HF : Halogen Free
- ⑦ 36 : AWG #36



Part No.	Material	Color	Terminal Material
50801H00-NP-5A-HF-36	Nylon 66,UL94V-0	Natural(White)	Phosphor Bronze/Gold-flash
50801H00-NPA-5A-HF-36	Nylon 66,UL94V-0	Natural(Black)	Phosphor Bronze/Gold-flash

REV.	REVISION RECORD	DATE	UNIT: MM
A0	新图面发行	15. 06. 30	0.00±0.15
A1	变更公司名称	17. 03. 30	0.00±0.08

GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
LINER	ANGLES	APPROVED	卢小锋	2017.03.30
0.0±0.25	X° REF±6°	DESIGNER	卢小锋	17.03.30
0.00±0.15	X° ±3°	DRAWN	卢小锋	17.03.30
0.00±0.08	X° X'±2°			

JCTC® 胜蓝科技股份有限公司
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司
 TITLE: JST刺破 0.80mm PITCH HOUSING

PART. NO:	50801H00-NPX-5A-HF-36
DWG. NO:	ENDE05
REV:	A1
SHEET:	1/1