
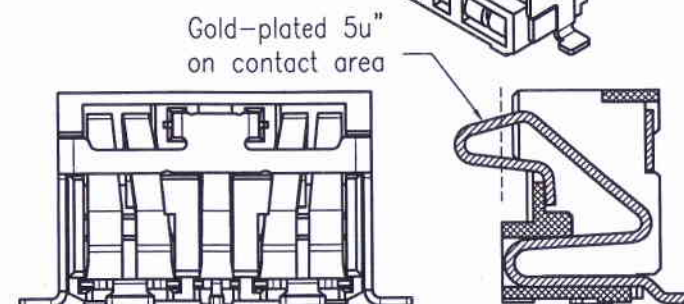
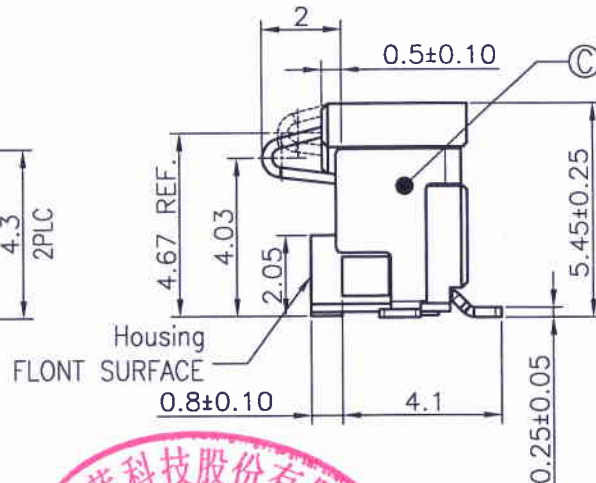
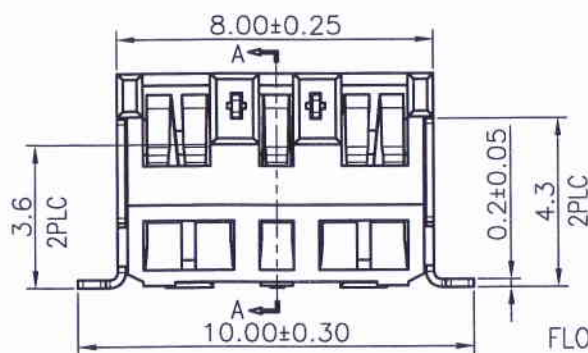
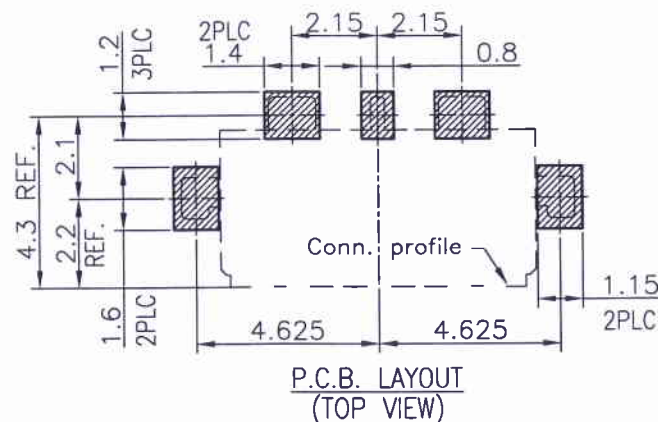


RoHS

Need hang Mylar
(FOR PICK AND
PLACE SYSTEMS)

Specifications:
Rated Voltage : 30V AC/DC
Rated Current : 3A AC,DC
Withstand Voltage : 500V AC/minute
Contact Resistance : 30mΩ(MAX.)
Insulation Resistance : 100MΩ(MIN.)
Temperature Range : -40°C~+85°C

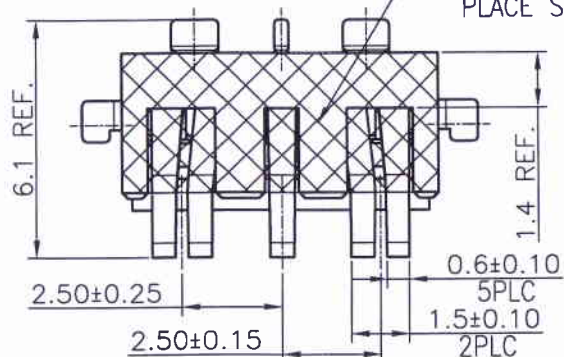


52004H00-3P

① ② ③

- ① Series No.
② H90 : Side Contact
H00 : Up Contact
③ No. of Circuits

SEC: A-A
Gold-flash
on solder area

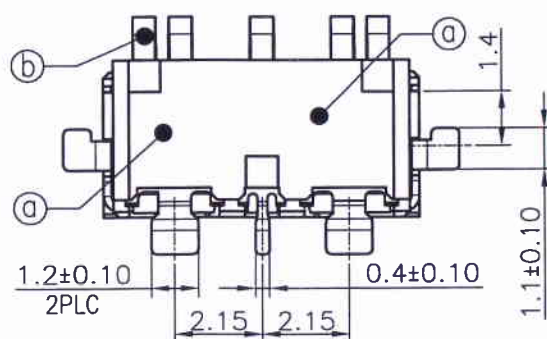

Part No.

52004H00-3P

No.	Description	Material	Color
a	Insulator	LCP,UL94V-0	Black
b	Terminal	Phosphor Bronze/Gold-plated 5u" on contact area,Gold-flash on solder area	--
c	Solder Tabs	Brass/Mist Tin-plated	--

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE
C0	新图面发行	10.04.14	LINEAR	1:1		
C1	按客户图面重标尺寸	10.10.09	0.0±0.25	APPROVED		
C2	端子由镀半金锡改为镀全金	11.05.06	X° REF±6°	DESIGNER		
C3	变更公司名称	17.03.20	0.00±0.15	DRAWN	卢小锋	17.03.20
			0.000±0.08			

JCTC® 胜蓝科技股份有限公司
TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司

TITLE:

3P 电池座

PART NO:

52004H00-3P

DWG. NO:

ENDE05




REV:

C3




SHEET: 1/2

RoHS

3 Contacts

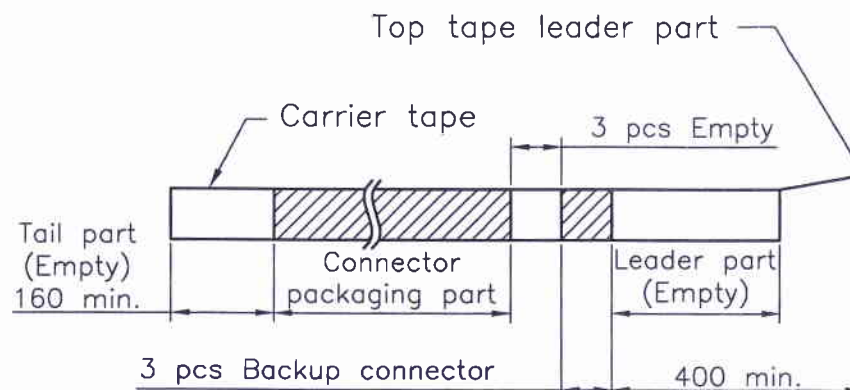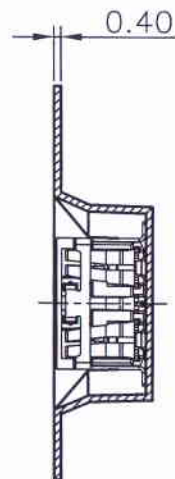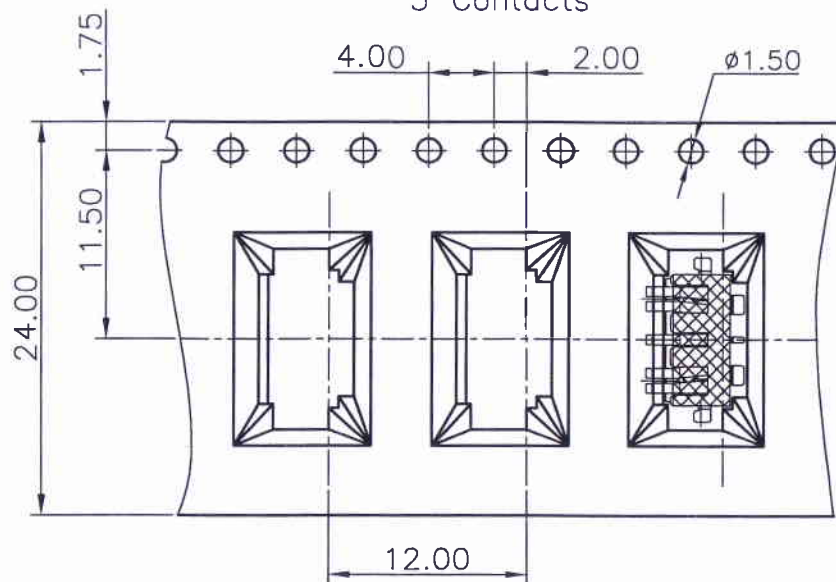

Unreeling direction →

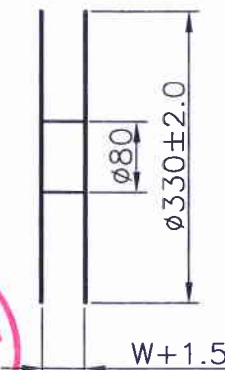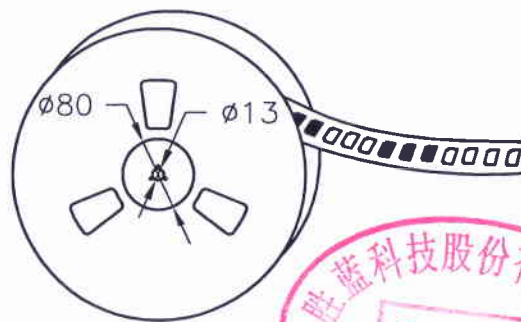

NOTE:

Material: Black or Transparent
Anti-static Polystyrene.

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
3P	24	11.50		1,000

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE
C0	新图面发行	10.10.09	LINEAR	1:1		
C1	变更公司名称	17.03.20	ANGLES			
			0.0±0.25			
			X° REF±6°			
			UNIT: MM			
			0.00±0.15			
			X° ±3°			
			SIZE: A4			
			0.000±0.08			
			X° X'±2°			

JCTC 胜蓝科技股份有限公司
TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司

TITLE: 3P 电池座

PART. NO:	52004H00-3P
DWG. NO:	ENDE05
REV:	C1
SHEET:	2/2