



REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	 JCTC ® TERMINAL&CONNECTORS
A0	新图面发行	2019. 11. 23		LINEAR	ANGLES	APPROVED			80601W00-2X74PA-SF-001	ENDE05	
			0.00±0.20	X° ±3°	DESIGNER			TITLE:			
			SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	Wang_jr	2019. 11. 23	SLIMSAS 8X V/T SOCKET	REV: A0	

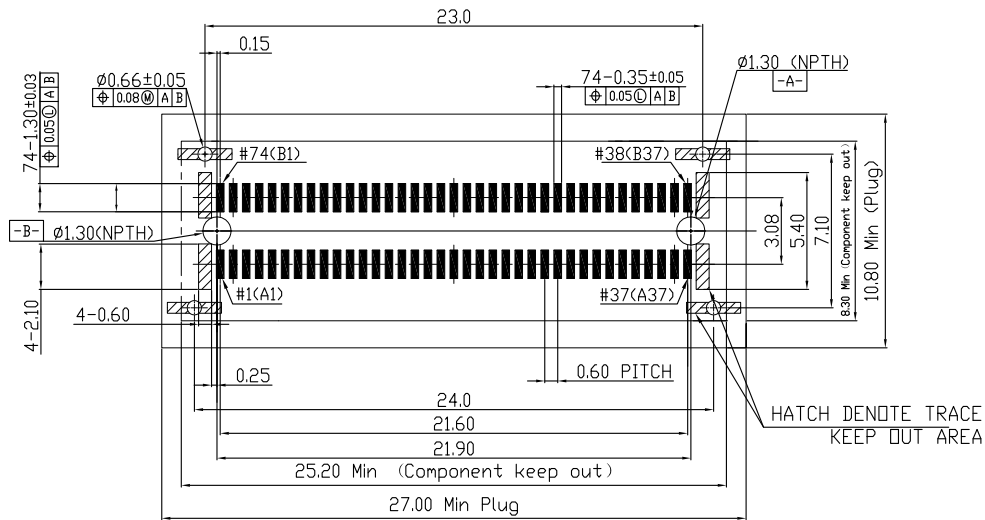

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

PACKING SPEC

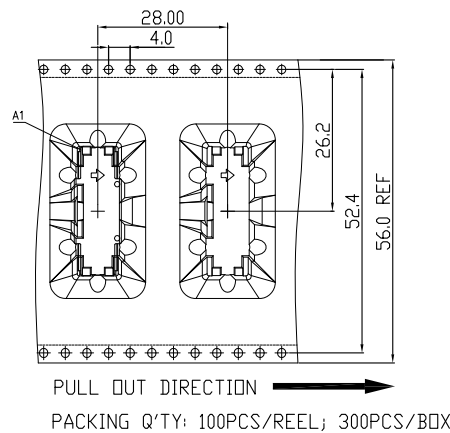

SPECIFICATIONS:


- Material And Finish:
 - Insulater: High Temperature Thermoplastic UL94 V-0, Black.
 - Contact: Copper Alloy.
 - Gold Plated Over Nickel Plated On Mating Area.
 - Matte Tin Plated Over Nickel On Solder Area.
 - Latch: Stainless Steel.
 - Nickel Plated Overall.
- Electrical Specification
 - Contact Resistance: 20m Ohms Max.
 - Insulation Resistance: 1000M Ohms Min. At 100V DC For 60 Seconds.
 - Withstanding Voltage: 300V Min. DC For 60 Seconds.
 - Voltage Rating: 30V AC.
 - Current Rating: 0.5A Per Pin.
- Mechanical Specification
 - Latch Retention Force: 50N Min.
 - Mating Force: 40N Max.
 - Unmating Force: 30N Max.
 - Durability: 250 Cycles.
- Environmental Specification
 - Operating Temperature: -40° ~ +85°C.
 - Temperature Rise: 30°C Max.

5. P/N ORDER

SLIMSAS SERIAL 8 0601W 0 0-2X74P A-S F-X 0 1

SERIAL NUMBER: 1,2,.....
 CONTACT PLATED: 0:30U" 1:15U"
 DIP LENGTH 0: 1.50mm; A: 2.20mm
 B: 3.00mm C: 4.20mm
 F: WITH LOCATING POST
 S: SMT TYPE
 HSG COLOR: X: NATURAL A: BLACK
 CONTACT NUMBER:
 74P: 74PIN CONTACT
 2X: DOUBLE ROW CONTACT
 3X: THREE ROW CONTACT

H:HOUSE
 W:ASSEMBLY PRODUCT
 0: 180° 1: 90°
 0: UL94V-0;
 1:UL94V-1;

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART. NO:	DWG. NO:	 TERMINAL&CONNECTORS	
A0	新图面发行	2019. 11. 23	LINEAR	ANGLES	1:1			80601W00-2X74PA-SF-001	ENDE05		
			0.0±0.30	X° REF±6°	APPROVED						
			0.00±0.20	X° ±3°	DESIGNER						
			UNIT: MM		DRAWN	Wang_jr	2019. 11. 23	TITLE:		REV: A0	SHEET: 2/2
			SIZE: A4	0.000±0.10				SLIMSAS 8X V/T SOCKET			