

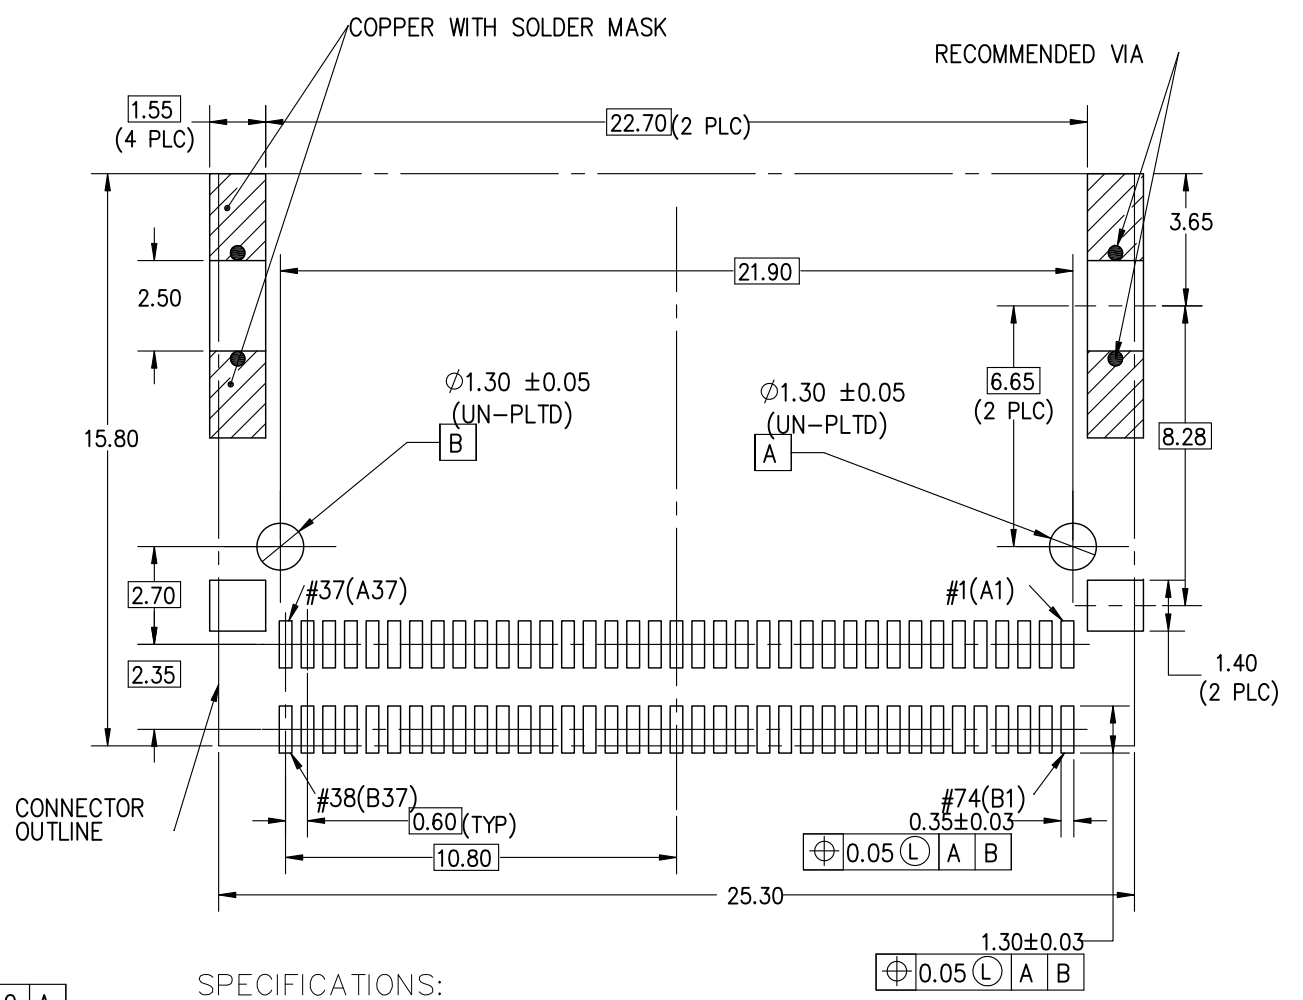
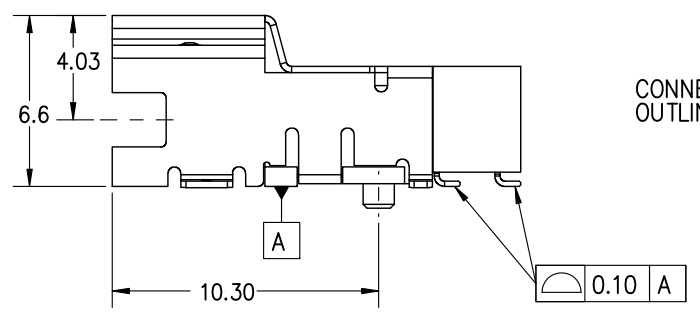
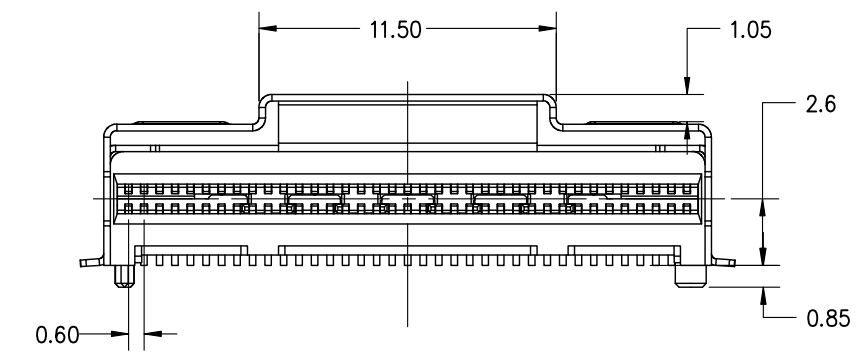
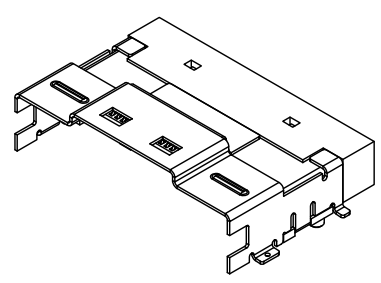


1 2 3 4 5 6 7 8

A B C D E F G H

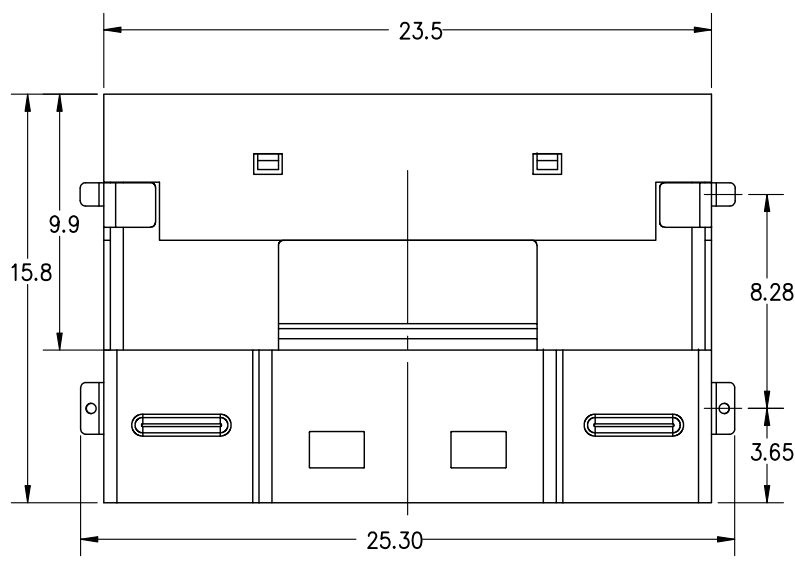

- SPECIFICATIONS:**
- Material And Finish:
 - Insulator: High Temperature Thermoplastic UL94 V-0, Black.
 - Contact: Copper Alloy.
 - Gold Plated Over Nickel Plated On Mating Area.
 - Matte Tin Plated Over Nickel On Solder Area.
 - Latch: Stainless Steel.
 - Nickel Plated Overall.
 - Electrical Specification
 - Contact Resistance: 20m Ohms Max.
 - Insulation Resistance: 1000M Ohms Min. At 100V DC For 60 S
 - Withstanding Voltage: 300V Min. DC For 60 Seconds.
 - Voltage Rating: 30V AC.
 - Current Rating: 0.5A Per Pin.
 - Mechanical Specification
 - Latch Retention Force: 50N Min.
 - Mating Force: 40N Max.
 - Unmating Force: 30N Max.
 - Durability: 250 Cycles.
 - Environmental Specification
 - Operating Temperature: -40° ~ +85°C.
 - Temperature Rise: 30°C Max.
 - RoHS Compliant.

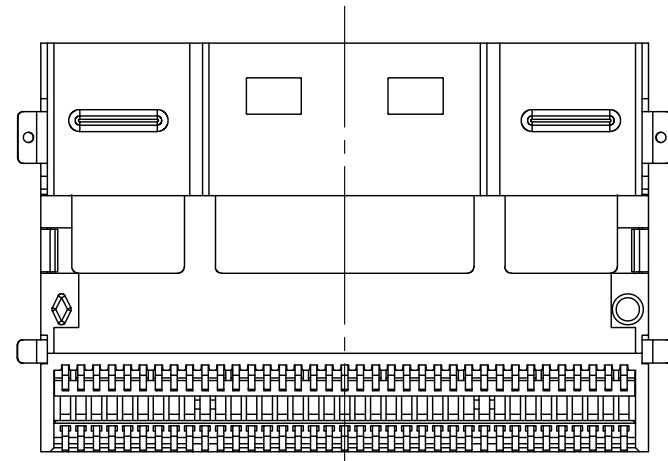

6. P/N ORDER

8 0601W 1 0-2X74P A-S F-X 0 6

SLIMSAS SERIAL
 PDUCT PITCH
 100j; 1.00mm pitch #1 Type;
 0601; 0.60mm pitch #1 Type;

HHOUSE
 W: ASSEMBLY PRODUCT
 0: 180° 1: 90°
 D: UL94V-0;
 1: UL94V-1;

PLATINED CODE
 CONTACT PLATED 0: 30U"
 S: SMT
 F: WITH LOCATING POST
 S: SMT TYPE
 HSG COLOR: A: BLACK

CONTACT NUMBER:
 74P: 74PIN CONTACT
 2X: DOUBLE ROW CONTACT
 3X: THREE ROW CONTACT

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	 TERMINAL&CONNECTORS
A0	新图面发行	2020. 04. 17		LINEAR	ANGLES	APPROVED			80601W10-2X74PA-SF-S06	ENDE05	
			0.0±0.30	X° REF±6°	DESIGNER			TITLE:			
			UNIT: MM	0.00±0.20	X° ±3°	DRAWN	KEVIN L	2021. 01. 05	SLIMSAS X8 R/A SOCKET	REV: A0	
			SIZE: A4	0.000±0.10	X° X'±2°						

1 2 3 4 5 6 7 8