
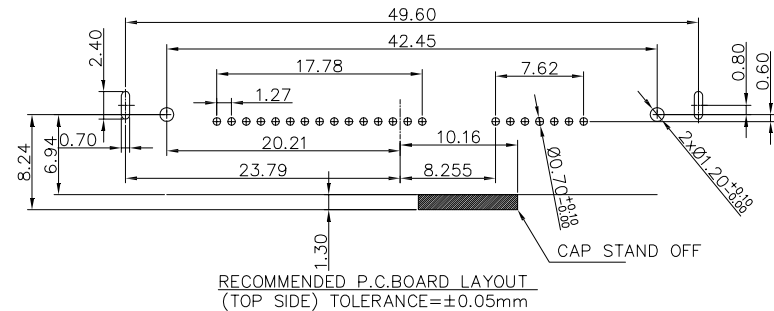

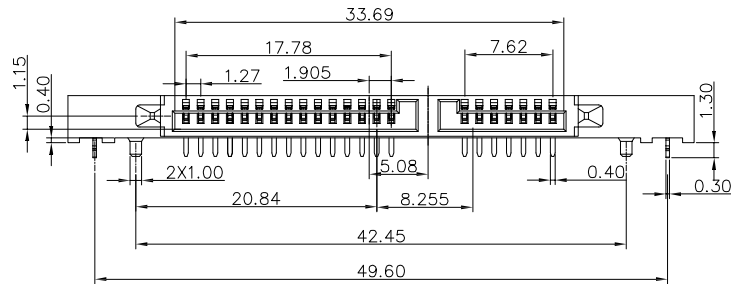


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

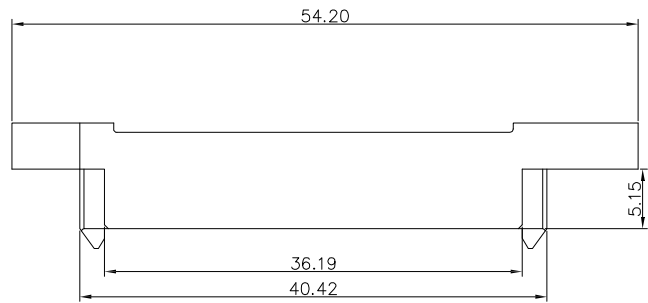

RECOMMENDED P.C.BOARD LAYOUT (TOP SIDE) TOLERANCE=±0.05mm

▨ PATTERN SOLDER AREA    ▤ PATTERN PROHIBITED AREA

P/N: WL SA F 9-15 1 1 A 0 005

CONNECTOR: SA-SATA      COLOR: A-BLACK

MALE FEMALE: F-FEMALE      PLATING: 1-G/F, 3-5U", 5-15U", 6-30U"

ANGLE: 9-90°      TERMPOINT: 1-DIP

PIN Q'PY: 15PIN

NOTES.

1.MATERIAL:

1.1 HOUSING: HIGH TEMPERATURE THERMOPLASTIC, GLASS FIBER FILLED, UL94V-0, BLACK.

1.2 CAP: HIGH TEMPERATURE THERMOPLASTIC, GLASS FIBER FILLED, UL94V-0, BLACK.

1.3 TERMINAL: COPPER ALLOY.


1.4 HOOK:BRASS.


2. FINISH:

2.1 TERMINAL: NICKEL UNDERPLATING OVER ALL.GOLD FLASH ON CONTACT AREA, MATTE TIN 100u" ON SOLDER AREA.

2.2 HOOK:NICKEL PLATING OVER ALL.MATTE TIN 100u" ON SOLDER AREA.

3. HALOGEN FREE & RoHS COMPLIANT PRODUCTS.

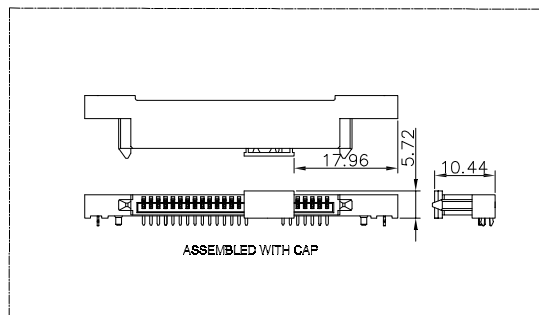

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:
AO	NEW RELEASE	22.05.09	LINEAR	ANGLES	1:1	Wang_jr	22.05.09	WLSAF9-1511A0005	ENDE05
			0.0±0.35	X'REF±6°	APPROVED	Han_Gao	22.05.09	TITLE: CONN,SATA HDD RECEPTACLE REVERSR R/A DIP HOOK,C/H H=2.30mm	 WanLian Teconology Co., Ltd
			0.00±0.25	X'±3°	DESIGNER	LanXuan_Hou	22.05.09		
			0.000±0.10	X'X' ±2°	DRAWN				
			UNIT:mm						REV: A0
			SIZE: A4						SHEET: 1/1