The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

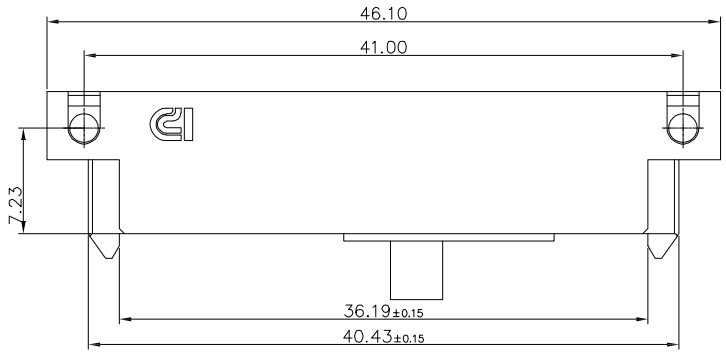



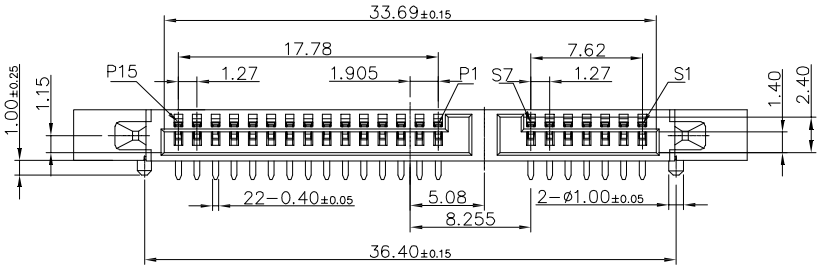



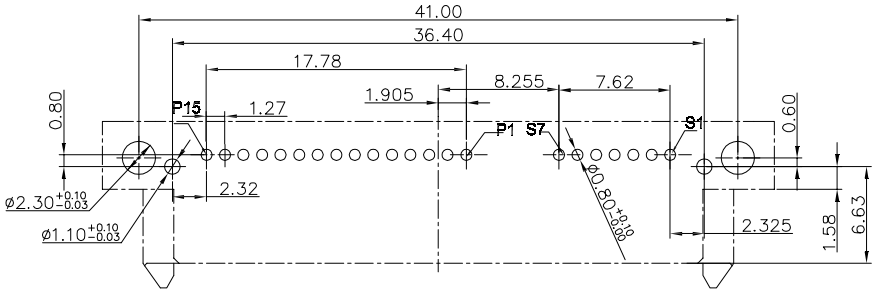

RECOMMEND PCB LAYOUT

PCB H=1.00MM TOLERANCE:±0.05

NOTES:

1. MATERIAL:
   - 1.1 HOUSING: HIGH TEMPERATURE THERMOPLASTIC, GLASS FIBER FILLED UL94V-0, COLOR BLACK
   - 1.2 CAP: HIGH TEMPERATURE THERMOPLASTIC, GLASS FIBER FILLED UL94V-0, COLOR BLACK
   - 1.3 TERMINAL: COPPER ALLOY
   - 1.4 NUT: BRASS
2. PLATING:
   - 2.1 TERMINAL:
     UNDERPLATED: NICKEL UNDERPLATING OVER ALL.
     GOLD FLASH ON CONTACT AREA, MATTE TIN 100u" ON SOLDER AREA.
   - 2.2 NUT:
     UNDERPLATED: NICKEL PLATING OVER ALL.
3. HALOGEN FREE & RoHS COMPLIANT PRODUCTS.
4. DATE CODE: * ** *
   - * LOT NO.
   - ** WEEK
   - * YEAR

P/N: WL SA F 9-15 1 1 A 0 007

- CONNECTOR: SA-SATA
- MALE FEMALE: F-FEMALE
- ANGLE: 9-90°
- PIN Q'PY: 15PIN
- TERMIPOINT: 1-DIP
- PLATING: 1-G/F, 3-5U", 5-15U", 6-30U"
- COLOR: A-BLACK

REV.	REVISION RECORD	DATE
A0	NEW RELEASE	22.05.09

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.35	X°REF±6°
UNIT: mm 0.00±0.25	X°±3°
SIZE: A4 0.000±0.10	X°X' ±2°

SCALE: 1:1	NAME	DATE
APPROVED	Wang_jr	22.05.09
DESIGNER	Han_Gao	22.05.09
DRAWN	LanXuan_Hou	22.05.09

PART.NO: WLSAF9-1511A0007

DWG.NO: ENDE05

TITLE: CONN,SATA HDD RECEPTACLE REVERSR R/A DIP WITH NUT,C/H=1.70mm

万连科技 WanLian Teconology Co., Ltd

REV: A0 SHEET: 1/1