


RoHS Compliant

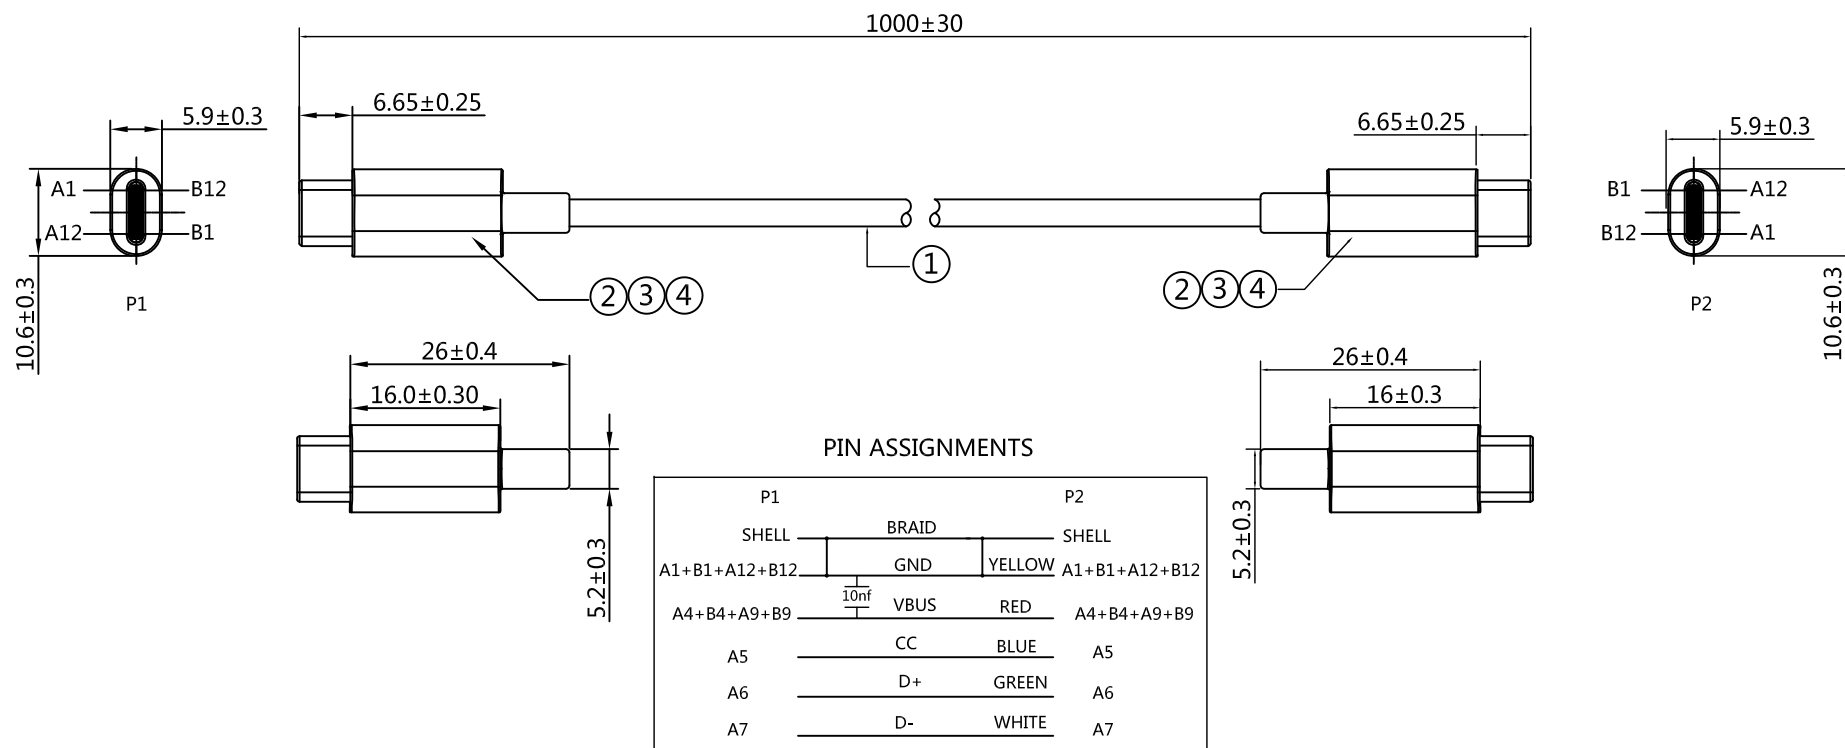


ELECTRICAL TEST:

1. OPEN OR SHORT,INTERMITTENCE 100% TEST
2. HI-POT:300V DC/0.1SEC
3. INSULATION RESISTANCE:10MΩ MIN
4. CURRENT: 3A MAX.
5. CONDUCTIVE RESISTANCE: 2Ω MAX.


④	OUTER MOLDING	TPE WHITE	8G
③	INNER MOLDING	LD-PE TRANSPARENT	4G
②	TYPE-C PLUG	TYPE C 2.0 PLASTIC WHITE ,UL 94V-0 CONTACT PLATED G/F, WITH PCBA 10nf , SHELL PLATED NICKEL.	2SET
①	RAW CABLE	30AWG*2C+30AWG*1C+24AWG*1C+22AWG*1C+AB OD:3.6±0.15mm TPE JACKET COLOR: WHITE	1M
NO.	NAME	SPECIFICATION STANDARD	QT'Y

						一般公差 GENERAL TOLERANCE		绘 图 DR.	Larry	 JCTC[®] Shenglan Technology Co LTD <small>TERMINAL & CONNECTORS</small>	料号 PART NO. JCT069-F005		
						X.X ±0.5	X' ±5'	校 对 CHK.	Larry		文件编号 NUMBER		
						X.XX ±0.3	X.X' ±3'	审 核 CHK.	Wyj		ENDCA08		
X0	20.03.12	NEW EDITION	Wyj	Josha		X.XXX ±0.2	▲ MAJOR DIM.	核 准 APPD.	Josha		Type C to Type C 2.0 L=1000mm		
版次REV.	日期 DATE	变 更 内 容 DESCRIPTION	审 核 CHK.	核 准 APPD.	单位UNIT mm						比例 SCALE 1:1	SHEET 1/1	版次 REV. X0


RoHS Compliant




1. PET film binding;




2. Each 4 pcs of finished products are put into a PE bag and sealed with transparent tape;





3. Take 1 pcs diaphragm;

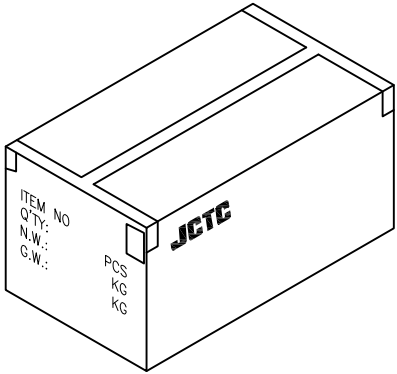

5. Put 2 bags of desiccant in each box, seal the box with transparent tape, seal the zero number box with yellow tape, and fill it with foam and other fillers.

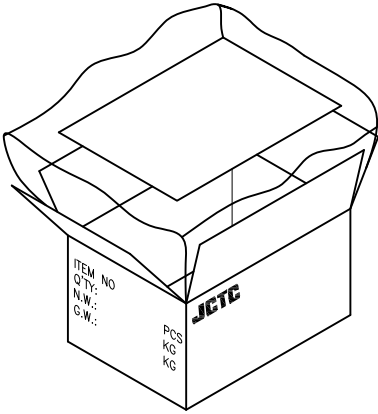

4. Carton size: L: 380mm * W: 320mm * H: 280mm; The waterproof bag is placed in the outer box in 9 layers with 40 PCs in each layer; each layer is separated by partition board, with a total of 360pcs / box;

						一般公差GENERAL TOLERANCE		绘图 DR.	wyj	JCTC® Shenglan Technology Co LTD <small>TERMINAL & CONNECTORS</small>	料号 PART NO. JCT069-F005		
						X.X ±0.15	X' ±2'	校对 CHK.	wyj		文件编号 NUMBER ENDCA08		
						X.XX ±0.05	X.X' ±1'	审核 CHK.	Josha	品名TITLE USB2.0 A to Type C L=1000mm	比例SCALE 1:1		
						X.XXX ±0.02	▲ MAJOR DIM.	核准 APPD.	Josha		SHEET 1/1		
△ X	X0	18.12.29	NEW EDITION	wyj	Josha	单位 UNIT mm						版次 REV. X0	
MARK	REV.	DATE	DESCRIPTION	CHK.	APPD.								