




RoHS Compliant

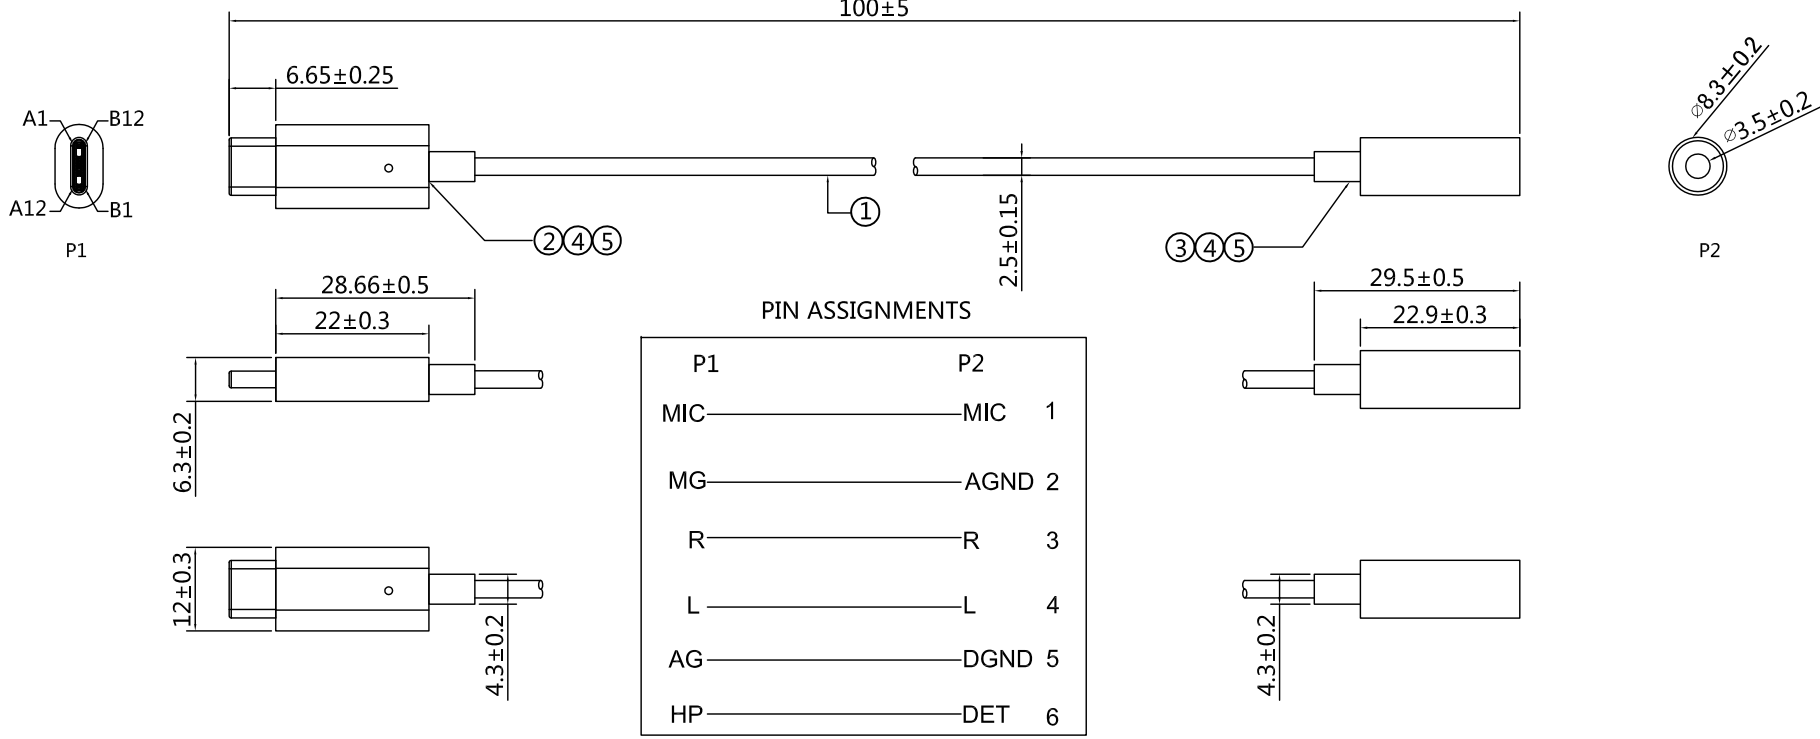

ELECTRICAL TEST:
1. OPEN OR SHORT,INTERMITTENCE 100% TEST
2. HI-POT:200V DC/0.1SEC
3. INSULATION RESISTANCE:10MΩ MIN
4. CONDUCTIVE RESISTANCE: 1Ω MAX.


⑤	OUTER MOLDING	TPE BLACK	8G
④	INNER MOLDING	LD-PE	4G
③	CONN	3.5MM JACK 6PIN ,PLASTIC BLACK , CONTACT PLATED G/F, SHELL PLATED NICKEL	1PCS
②	TYPE-C PLUG	TYPE C PLUG WITH PCBA: IC (REALTEK ALC5686) PLASTIC BLACK , CONTACT PLATED G/F, SHELL PLATED NICKEL	1PCS
①	RAW CABLE	{(35/0.05+500D)*4C+[(35/0.05+500D)*1C+S 35/0.05] } +F) OD:2.5±0.15mm TPE JACKET COLOR: BLACK	0.1M
NO.	NAME	SPECIFICATION STANDARD	QTY

					一般公差 GENERAL TOLERANCE		绘 图 DR.	Larry	<div> Shenglan Technology Co LTD</div> <div>TERMINAL & CONNECTORS</div>	料号 PART NO. JCT097-F001		
					X.X ±0.5	X* ±5"	校 对 CHK.	Larry		文件编号 NUMBER		
					X.XX ±0.3	X.X* ±3"	审 核 CHK.	Wyj		ENDCA08		
					X.XXX ±0.2	▲ MAJOR DIM.				核 准 APPD.	Joshua	比例SCALE 1:1
X0	20.03.12	NEW EDITION		Wyj	Joshua	单位UNIT mm		品名TITLE Type C to Audio L=100mm		SHEET 1/1		版次 REV. X0
版次REV.	日期 DATE	变 更 内 容 DESCRIPTION		审 核 CHK.	核 准 APPD.							
A		B		C		D		E		F		

	A	B	C	D	E	F
RoHS Compliant						
1.	PE bag specification: 1145 * W20					
2.	PE bag specification: 210 * 160, each PE bag contains 50pcs of products, the opening of the bag is folded, and the transparent tape is sealed;					
3.	Put 4 bags in each layer, with a total of 200 pcs of products in each layer					
4.	As shown in the figure, put the waterproof bag into the box with 8 layers in each box, and separate each layer with partition board. Each box contains 1600pcs of products in total;					
5.	The adhesive tape for sealing the carton must be transparent and without silk screen printing. When sealing the carton, the adhesive tape shall be of I-shape;					
6.						
7.						
8.						


2. PE bag specification: 210 * 160,
each PE bag contains 50pcs of
products, the opening of the bag is
folded, and the transparent tape is
sealed;

3. Put 4 bags in each layer, with a total of 200 pcs of products in each layer

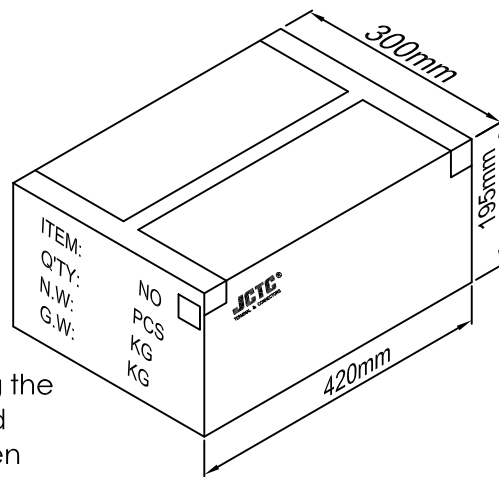

5. The adhesive tape for sealing the carton must be transparent and without silk screen printing. When sealing the carton, the adhesive tape shall be of I-shape;

4. As shown in the figure, put the waterproof bag into the box with 8 layers in each box, and separate each layer with partition board. Each box contains 1600pcs of products in total;

8						一般公差GENERAL TOLERANCE		绘 图	Larry	<div><div><div>JCTC[®]</div><div>TERMINAL & CONNECTORS</div></div><div>Shenglan Technology Co LTD</div></div>	料号 PART NO. JCT097-F001		
						X.X ±0.5	X* ±5°	校 对	Larry		文件编号 NUMBER ENDCA08		
						X.XX ±0.3	X.X* ±3°	审 核	Wyj				
	X0	20.03.12	NEW EDITION	Wyj	Josha	X.XXX ±0.2	▲MAJOR DIM.	核 准	Josha			品名TITLE Type C to Audio L=100mm	
	版次REV.	日期 DATE	变 更 内 容 DESCRIPTION	审 核 CHK.	核 准 APPD.	单位UNIT mm						比例SCALE 1:1	SHEET 1/1
A		B			C		D		E			F	