

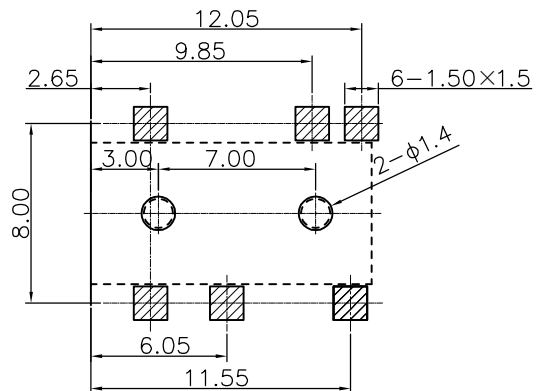


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS







RECOMMEND PCB LAYOUT
TOLERANCE ±0.05



NOTE:


- 1.MATERIAL SPECIFICATION:
1-1.HOUSING:UL94V-0,
1-2.CONTACTS:BRASS ALLOY
- 2.PLATING SPECIFICATION:
2-1.CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
- 3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING:0.5A
3-2.VOLTAGE RATING:30V MAX
3-3.CONTACT RESISTANCE: 50 millioHM (Initial) Max.
3-4.INSULATION RESISTANCE: 100 MEGOHM Min.
3-5.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.
- 4.ENVIRONMENTAL PERFORMANCE
OPERATING TEMPERATURE: -20°C~+85°C.

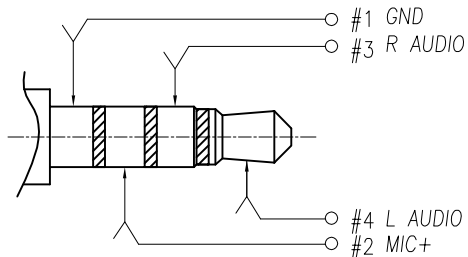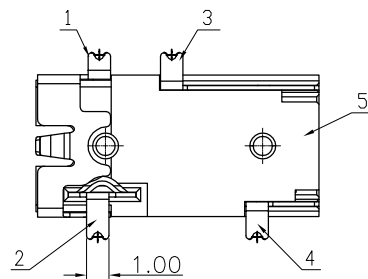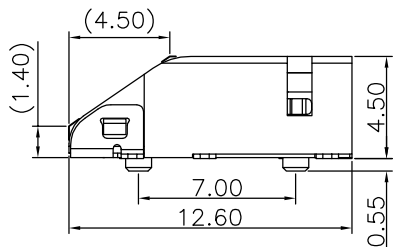

MALE PLUG SCHEMATIC

WLPJF9-04 2 X X 0 016

PLATING: COLOUR:
A:Black
1-G/F
2-AU 3U"
5-AU 15U"
6-AU 30U"

REV.	REVISION RECORD	DATE	☉	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO: WLPJF9-042XX0016	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd
AO	NEW RELEASE	21.01.13		LINEAR	ANGLES	1:1	Wang_jr	21.01.13			
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Ding_bo	21.01.13	TITLE: φ3.5 JACK 4.5H 4PIN short body		
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Ou_jian	21.01.13			