

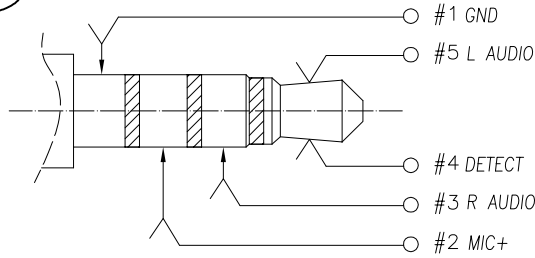


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements




RoHS

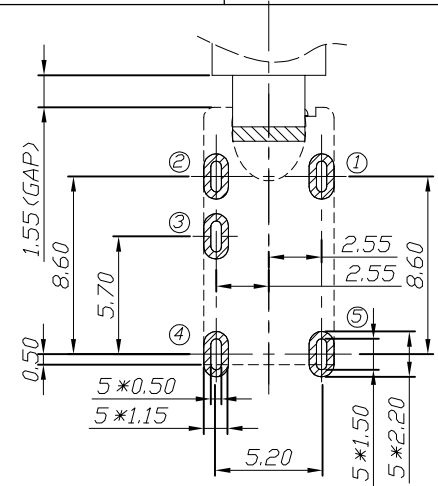

MALE PLUG SCHEMATIC



RECOMMEND PCB LAYOUT
TOLERANCE:±0.05

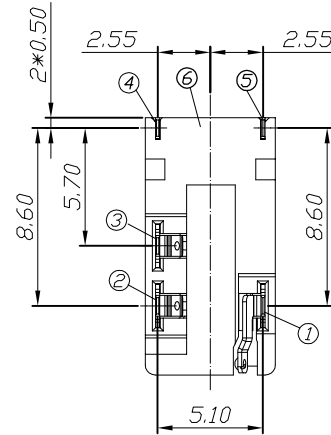

NOTE:

1.ELECTRICAL PERFORMANCE:

- 1-1.CURRENT RATING:0.5A
 - 1-2.VOLTAGE RATING:12V MAX
 - 1-3.CONTACT RESISTANCE: 50 millioHM (Initial) Max.
 - 1-4.INSULATION RESISTANCE: 100 MEGOHM Min.
 - 1-5.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.
- 2.ENVIRONMENTAL PERFORMANCE
OPERATING TEMPERATURE: -20°C~+85°C.

WLPJF9-05 1 X X 0 010

PLATING: COLOUR:
1-G/F A:Black
2-AU 3U"
5-AU 15U"
6-AU 30U"

6	Housing	PA9T UL 94V-0, COLOR: BLACK	1	
5	Contact #5		1	
4	Contact #4	CONTACT:C5210-H	1	
3	Contact #3	Underplating:Plated Ni 50u" Min.	1	
2	Contact #2	Contact area: Gold Flash Plated	1	
1	Contact #1		1	
ITEM	NAME	FINISH	Q'ty	REMARK

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	<p>WanLian Teconology Co., Ltd</p>	
A0	NEW RELEASE	21.01.13	LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	WLPJF9-051XX0010	ENDE05		
			0.0±0.35	X°REF±6°	DESIGNER	Ding_bo	21.01.13	TITLE:			
			UNIT: mm	0.00±0.25	X°±3°	DRAWN	Du_jian	21.01.13	On the board ø3.5 JACK 3.8H DIP TYPE		REV: A0
			SIZE: A4	0.000±0.10	X°X'±2°						