

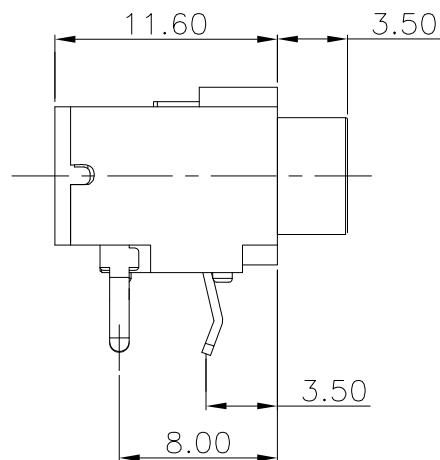
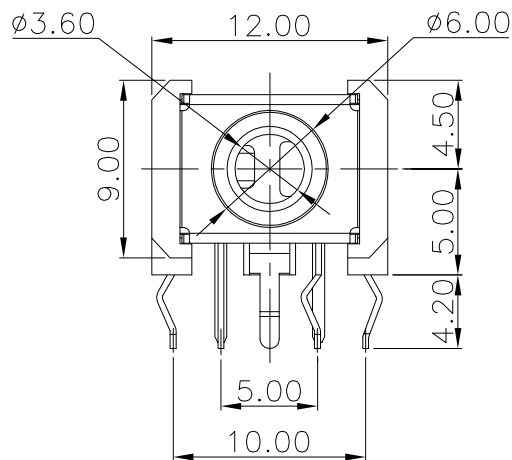
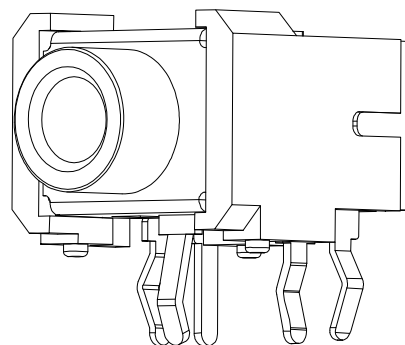
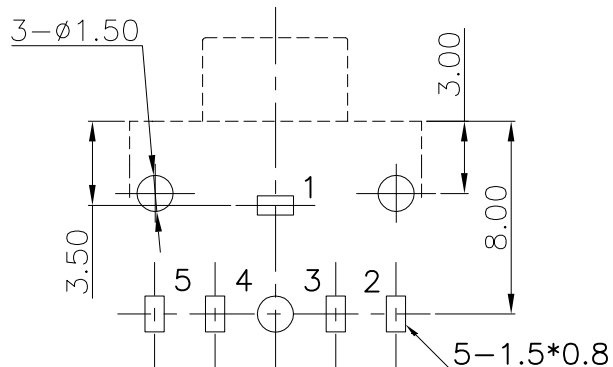


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS



电路原理图

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.THRUST SHAFT:BRASS $\phi 6$
 - 1-2.HOUSING:PA9T
 - 1-3.CONTACT CLIP: BRASS T=0.45mm
 - 1-4.SPRING 1,2: PHOSPHOR BRONZE T=0.30mm
 - 1-5.STATOR 1,2: BRASS T=0.40mm
 - 1-6.BACK COVER:PA9T
- 2.PLATING SPECIFICATION:
 - 2-1.THRUST SHAFT:NI-PLATING.
 - 2-2.CONTACT CLIP: SN-PLATING ON CONTACT AREA.
 - 2-3.SPRING 1,2: AG-PLATING ON CONTACT AREA.
 - 2-4.STATOR 1,2: AG-PLATING ON CONTACT AREA.
- 3.MECHANICAL PERFORMANCE:
 - 3-1.LIFE TEST: 5000 CYCLES
 - 3-2.INSERTION AND EXTRACTION FORCE: 3N~30N
- 4.ELECTRICAL PERFORMANCE:
 - 4-1.RATING CURRENT:0.5A
 - 4-2.RATING VOLTAGE:30V
 - 4-3.CONTACT RESISTANCE:50m Ω MAX; AFTER TEST:100m Ω MAX;
 - 4-4.INSULATION RESISTANCE:100M Ω MIN; AFTER TEST:50M Ω MIN;
 - 4-5.WITHSTANDING VOLTAGE: 500V AC
- 5.OPERATION TEMPERATURE RANGE: -20°C~+70°C

6.P/N:

WLPJF9-05 X 1 1 0 060

PLATED: 1.G/F 7.SN 8.AG HOUSING: 1.PA9T BLACK

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
AO	NEW RELEASE	21.01.13		LINEAR	ANGLES	1:1					
			0.00±0.25	X'±3'	DESIGNER	Han_Gao	21.01.13	WLPJF9-05X110060	PHONE JACK		
			0.00±0.10	X'X' ±2'	DRAWN	Zijun_Huang	21.01.13				