

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements



RoHS

NOTE:

- 1.MATERIAL SPECIFICATION:
  - 1-1.TERMINAL:COPPER ALLOY
  - 1-2.CONTACT:COPPER ALLOY
  - 1-3.FRAME:IRON
  - 1-4.LEVER:THERMOPLASTICS COLOUR:BLACK
  - 1-5.BASE:THERMOPLASTICS COLOUR:BLACK
- 2.PLATING SPECIFICATION:
  - 2-1.TERMINAL:AG PLATING ON CONTACT AREA.
  - 2-2.CONTACT:AG PLATING ON CONTACT AREA.
  - 2-3.FRAME:SN-PLATING.
- 3.ELECTRICAL PERFORMANCE:
  - 3-1.RATING CURRENT:0.5A
  - 3-2.RATING VOLTAGE:12V
  - 3-3.CONTACT RESISTANCE: 0.03Ω MAX;
  - 3-4.INSULATION RESISTANCE:100MΩ MIN
  - 3-5.WITHSTANDING VOLTAGE: 250V AC
- 4.MECHANICAL PERFORMANCE:
  - 4-1.ACTION FORCE: 260±30GF
  - 4-2.DURABILITY: 30000~50000 CYCLES.
- 5.OPERATION TEMPERATURE RANGE:-25°C~+85°C
- 6.P/N: WLSW19-03 1 X X 0 042

PLATED:  
1.G/F  
7.SN  
8.AG

COLOUR:  
A.BLACK

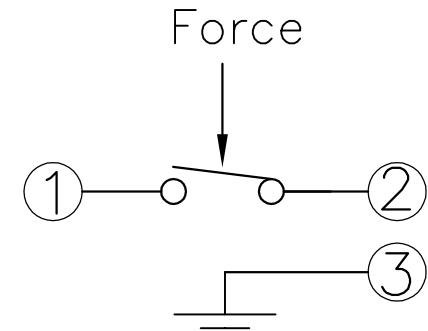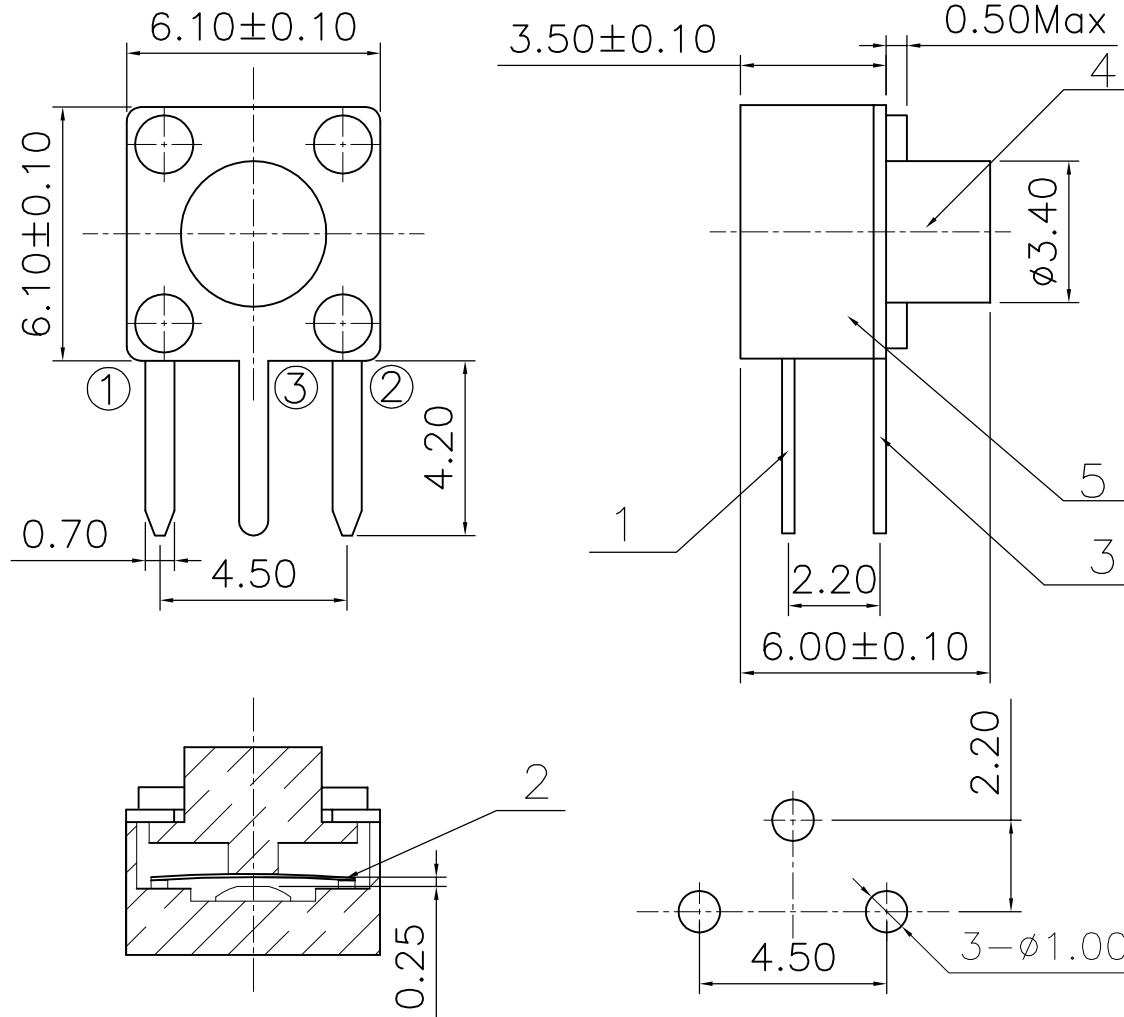

CIRCUIT DIAGRAM

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
AO	NEW RELEASE	21.01.13	LINEAR	ANGLES	1:1	Wang_jr	21.01.13	WLSW19-031XX0042	ENDE05	
			0.0±0.35	X'REF±6'	APPROVED	Han_Gao	21.01.13	TITLE:		
			0.00±0.25	X'±3'	DESIGNER	Zijun_Huang	21.01.13	TACT SWITCH		
			UNIT:mm	X'X' ±2'	DRAWN					
			SIZE: A4	0.000±0.10						

REV: A0 SHEET: 1/1