
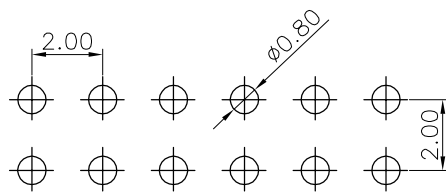
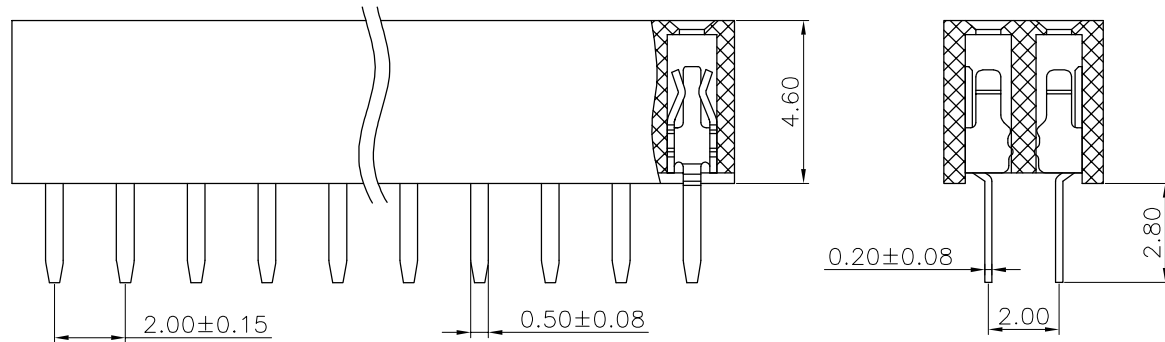


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

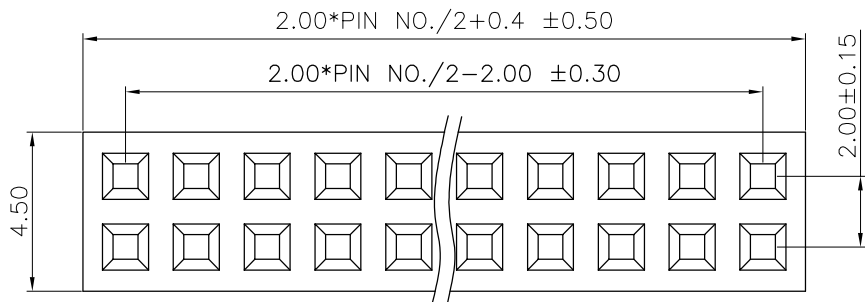

RECOMMENDED PCB LAYOUT  
(GENERAL TOLERANCE:±0.05)

**广东万连科技有限公司**  
**样品图纸专用章**  
**产品中心**

NOTE:

- 1.MATERIAL SPECIFICATION:
  - 1-1.HOUSING: UL94V-0
  - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
  - 2-1.CONTACTS: GOLD FLASH OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
  - 3-1.CURRENT RATING: 2A
  - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
  - 3-3.INSULATION RESISTANCE: 1000MΩ Min
  - 3-4.DIELECTRIC WITHSTANDING : 300V
- 4.ENVIRONMENTAL PERFORMANCE:
  - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: TRAY
- 6.P/N:

FH2005 46 F 0-2 XX 1 X X X 01

SERIES NO: \_\_\_\_\_ HOUSING: 1-PA6T

HEIGHT: \_\_\_\_\_ COLOR: A-BLACK

46: 4.6mm

MALE FEMALE: \_\_\_\_\_ PLATING: A-ALL AU G/F

F-FEMALE

ANGLE: \_\_\_\_\_ TERMPOINT: 1-DIP

0-180°

ROW NO: \_\_\_\_\_

2-DOUBLE ROW

PIN Q'PY: \_\_\_\_\_

04~80

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
				LINEAR	ANGLES						
A0	NEW RELEASE	21.10.15		0.00±0.35	X'REF±6°	APPROVED	Wang_jr	21.10.15	FH200546F0-2XX1XXX01	ENDE05	
			UNIT:mm	0.00±0.25	X'±3°	DESIGNER	Gao_Han	21.10.15	TITLE: 2.0 180° 双排排母H4.6		REV: A0 SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Gao_Han	21.10.15			