


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

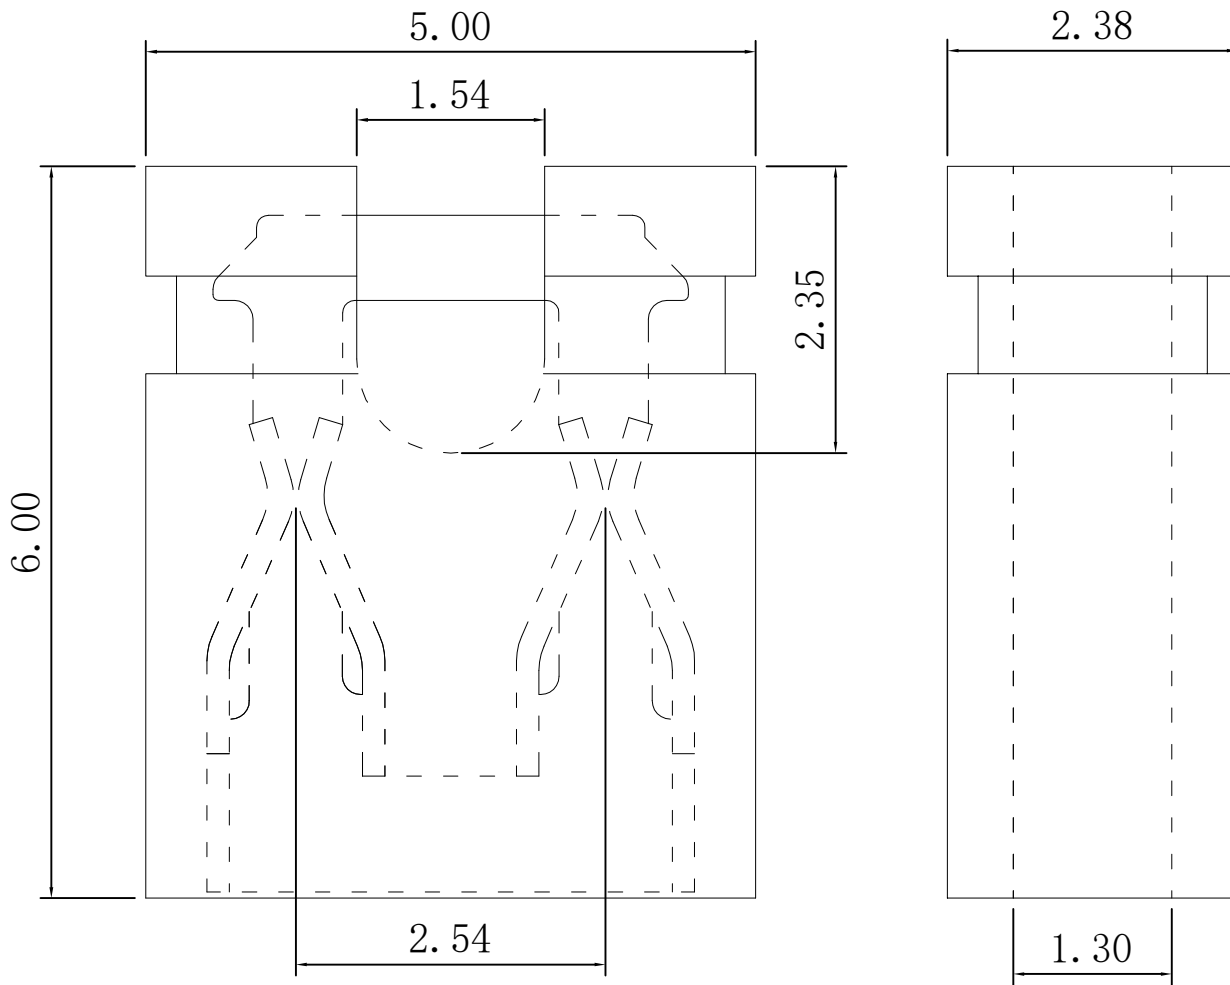

Specification:

Housing: PBT,UL94V-0

Contacts: BRASS

Nickel plating bottom 50U "Min

Retentivity Force: 0.5KGF/Pin Min

Durability: 100 Cycles.

Current Rating: 3.0A

Rated Voltage: 500V AC/DC

Contact Resistance: 30 mΩ Max

Insulation Resistance: 1000MΩ Min

Dielectric Withstanding: 1000V

Operating Temperature: -40°C~+105°C.

The Product Using Material And Processing Must Conform To The "WL-PZ-142"Hsf Technical Standard Control Requirements

P/N:

B2541 S 1 X 0-1 XX X X

SERIES NO:

CONNECTOR:

S-短路帽

1-TYPE CODE

PLATING:

A-ALL AU G/F

C-BRIGHE TIN

9-NI

ANGLE:

0-180°

1-WATER CODE

COLOR:

A-BLACK

K-WHITE

J-GRAY

PIN Q'PY:

02PIN

ROW NO:

1-SINGLE ROW

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	21.10.12		UNIT:mm	LINEAR 0.00±0.25	ANGLES X'±3'	APPROVED	Wang_jr	21.10.12	B2541S1X0-1XXXX	
			SIZE: A4	0.00±0.10	X'X' ±2'	DESIGNER	Han_Gao	21.10.12	TITLE: 2.54 MJ 5*6 开口全镍H=6.0		REV: A0
						DRAWN	Zijun_Huang	21.10.12			SHEET: 1/1

WanLian Teconology Co., Ltd