
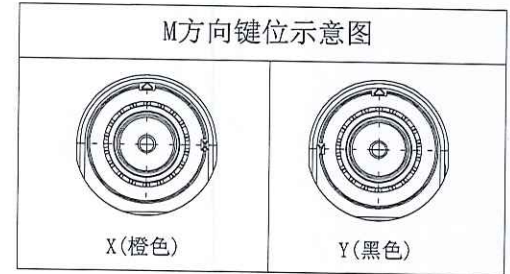
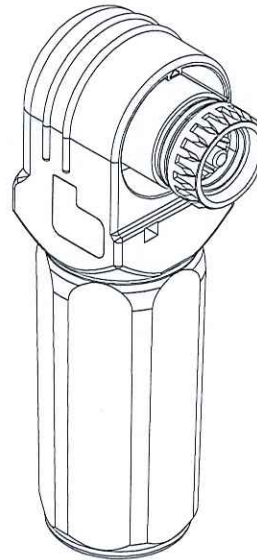
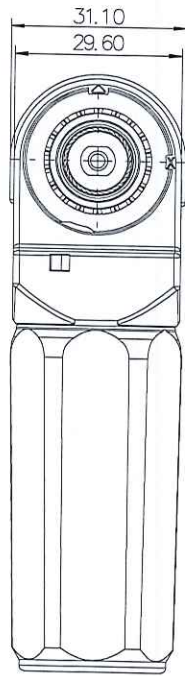


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

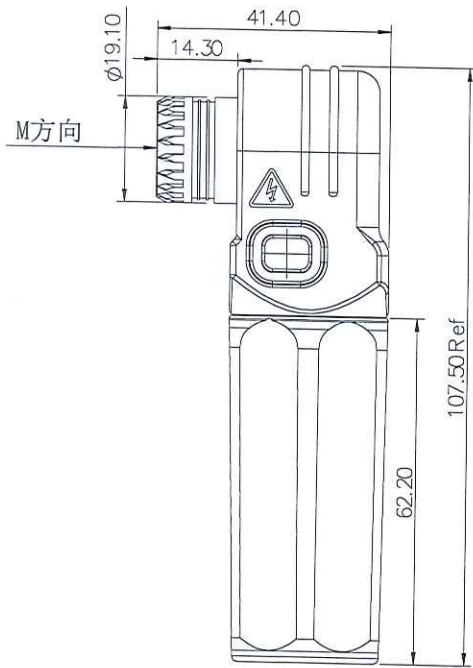

规格参数:

1. 工作温度: -40°C~125°C
2. 额定电流: 350A MAX
3. 额定电压: 1500V DC
4. 耐电压: 5000V DC
5. 防护等级: IP2X
6. 防水等级: IP65
7. 插入力: 50N Max
拔出力: 50N Max
8. 机械寿命: 100 Min
9. 铜排推荐安装扭矩: M8:7.2~8.8 N.m
10. 推荐法兰盘螺丝安装扭矩: 2.8~3.9 N.m

ES07PN-35001N X X 01

WIRE RANGE:
1-70mm²
2-95mm²

KEY&COLOR:
1-X KEY(橙色)
2-Y KEY(黑色)



Part No.	Material	Color	Note	Current
ES07PN-25001N1101	--	橙色	70mm ²	250A
ES07PN-25001N1201	--	黑色	70mm ²	250A
ES07PN-35001N2101	--	橙色	95mm ²	350A
ES07PN-35001N2201	--	黑色	95mm ²	350A

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:
AO	NEW RELEASE	21.10.23	LINEAR 0.0±0.35	1:1	东忠浩	21.10.23	ES07	ENDE05
			ANGLES X'REF±6'	APPROVED	李宇峰	21.10.23		
			0.00±0.25	DESIGNER	侯兰官	21.10.23		
			X'±3'	DRAWN				
			SIZE: A4					
			0.000±0.10					
			X'X' ±2'					


 WanLian Teconology Co., Ltd
 REV: AO SHEET: 1/1

