
4P~NP


2P~3P

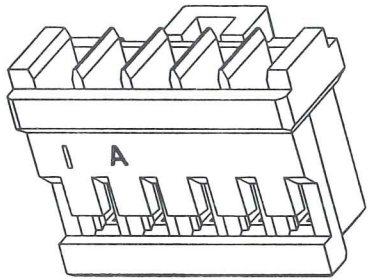

Specifications:
Rated Voltage : 250V AC/DC
Rated Current : 3A AC,DC
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -25°C~+85°C
The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

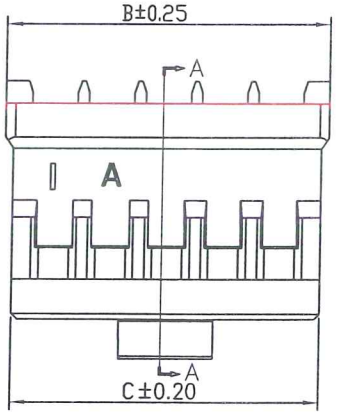

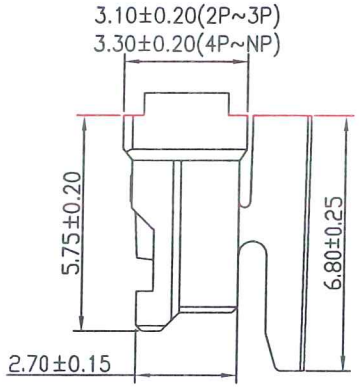

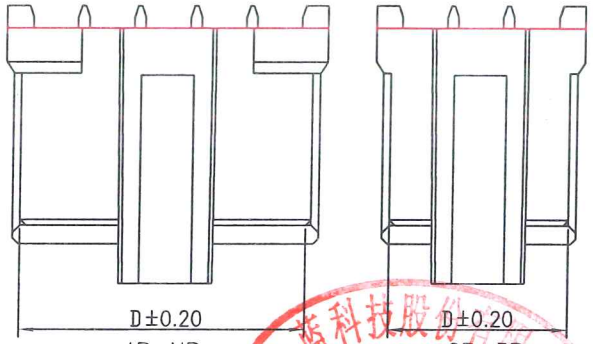

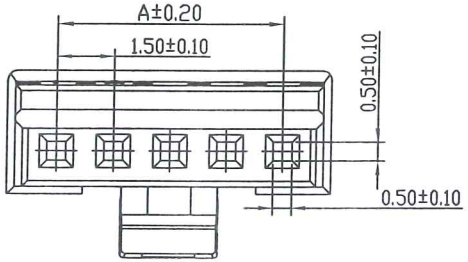

Part No	Dimensions			
	A	B	C	D
2P	--	4.10	3.70	3.30
3P	3.00	5.60	5.20	4.80
4P	4.50	7.10	6.70	6.30
5P	6.00	8.60	8.20	7.80
6P	7.50	10.10	9.70	9.30
7P	9.00	11.60	11.20	10.80
8P	10.50	13.10	12.70	12.30
9P	12.00	14.60	14.20	13.80
10P	13.50	16.10	15.70	15.30
11P	15.00	17.60	17.20	16.80
12P	16.50	19.10	18.70	18.30
13P	18.00	20.60	20.20	19.80
14P	19.50	22.10	21.70	21.30
15P	21.00	23.60	23.20	22.80

胜蓝科技股份有限公司
2020.12.08
工程部
技术文件发行章

Suitable for JCTC 11500 series terminal

Part No.	Material	Color
11500H00-NPA-L-HF-NK	Nylon 66,UL 94V-0	Black
11500H00-NP-L-HF-NK	Nylon 66,UL 94V-0	Natural(White)

REV.	REVISION RECORD	DATE
A0	新版发行	20.12.04

GENERAL TOLERANCES

LINEAR	ANGLES
0.0±0.25	X° REF±6°
0.00±0.15	X° ±3°
0.000±0.08	X° X'±2°

UNIT: MM
SIZE: A4

	NAME	DATE
SCALE: 1:1		
APPROVED		20.12.04
DESIGNER		20.12.04
DRAWN	张振坤	20.12.04

PART. NO: 11500H00-NPX-L-HF-NK
DWG. NO: ENDE05
TITLE: 1.50mm PITCH HOUSING
JCTC® TERMINAL&CONNECTORS
REV: A0
SHEET: 1/1