
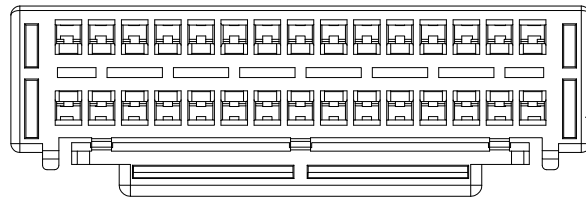

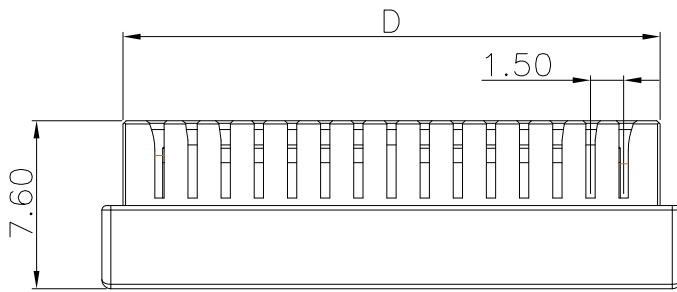



RoHS+HF

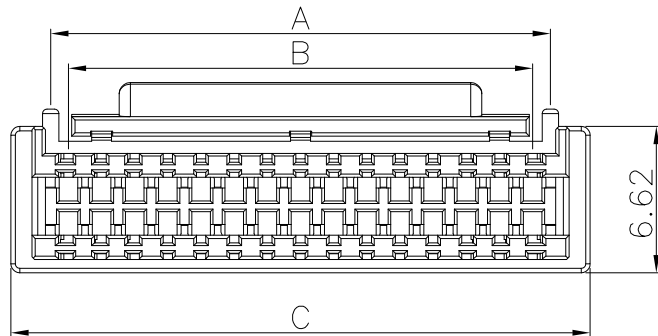

Specification:
 Housing: PA66,UL94V-0
 Retentivity Force: 0.15kgf/Pin Min
 Durability: 30 Cycles.
 Current Rating: 2A AC,DC(10~30P)
 1.5A AC,DC(32~40P)
 Rated Voltage: 100V AC/DC
 Contact Resistance: 30 mΩ Max
 Insulation Resistance: 500MΩ Min
 Dielectric Withstanding: 500V
 Operating Temperature: -25°C~+85°C.
 The Product Using Material And Processing Must Conform To The "WL-PZ-142" Hsf Technical Standard Control Requirements

P/N: 31501 H C-2 XX X-P 0002


① ②③⑤④⑥⑦ ⑧

- ① Series No.
- ② H : Male
- ③ C : 铆压式
- ④ 2 : Double row
- ⑤ No. of Circuits
- ⑥ Color: A-Black
K-White
O-NATURE
- ⑦ Package Spec: P-Pe bag
- ⑧ Water code


Ordering Information & Dimensions

PART NO.	Dimension mm			Q'ty/BAG
	A	B	C	
2*05	7.50	6.00	11.20	1000PCS
2*06	9.00	7.50	12.70	1000PCS
2*07	10.50	9.00	14.20	1000PCS
2*08	12.00	10.50	15.70	1000PCS
2*09	13.50	12.00	17.20	1000PCS
2*10	15.00	13.50	18.70	1000PCS
2*12	18.00	16.50	21.70	1000PCS
2*13	19.50	18.00	23.20	1000PCS
2*14	21.00	19.50	24.70	1000PCS
2*15	22.50	21.00	26.20	1000PCS


REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART.NO:	DWG NO.	 TERMINAL&CONNECTORS			
A0	NEW RELEASE	2022.03.02		LINEAR	ANGLES	APPROVED	WANG_JR	2022.03.02	31501HC-2XXX-P0002	ENDE05				
				0.0±0.35	X° REF±6°	DESIGNER	HU_XIAOYUN	2022.03.02	Pitch1.50 mm ZPD双排胶壳					
				0.00±0.25	X° ±3°	DRAWN	HAN_GAO	2022.03.02						
			SIZE: A4	0.000±0.10	X° X' ±2°					REV	A0	SHEET	1/2	

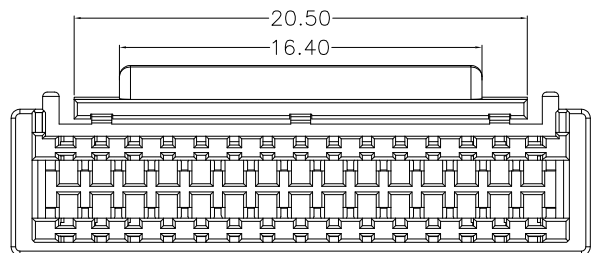


2*15




2*05

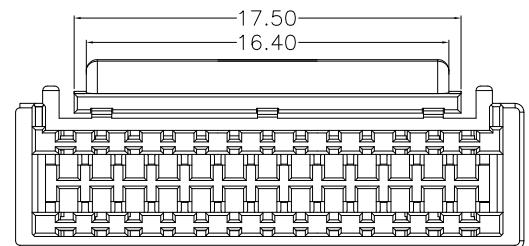


2*13




2*06

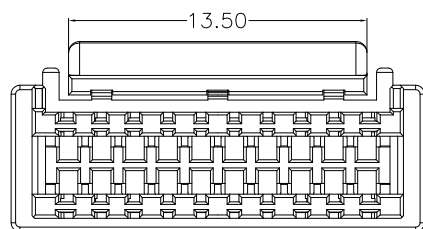


2*10



2*07

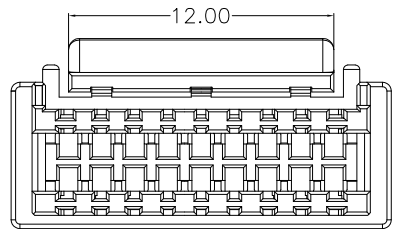

2*09

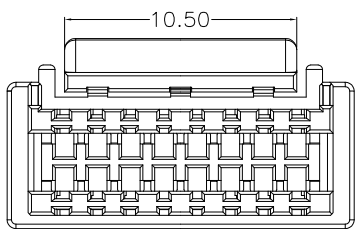

2*08

Specification:
 Housing: PA66,UL94V-0
 Retentivity Force: 0.15kgf/Pin Min
 Durability: 30 Cycles.
 Current Rating: 2A AC,DC(10~30P)
 1.5A AC,DC(32~40P)
 Rated Voltage: 100V AC/DC
 Contact Resistance: 30 mΩ Max
 Insulation Resistance: 500MΩ Min
 Dielectric Withstanding: 500V
 Operating Temperature: -25°C~+85°C.
 The Product Using Material And Processing Must Conform To The "WL-PZ-142" Hsf Technical Standard Control Requirements

- P/N: 31501 H C-2 XX X-P 0002
- ① Series No.
 - ② H : Male
 - ③ C : 铆压式
 - ④ 2 : Double row
 - ⑤ No. of Circuits
 - ⑥ Color: A-Black
K-White
O-NATURE
 - ⑦ Package Spec: P-Pe bag
 - ⑧ Water code

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART.NO:	DWG NO.			
A0	NEW RELEASE	2022.03.02		LINEAR	ANGLES	APPROVED	WANG_JR	2022.03.02	31501HC-2XXX-P0002	ENDE05			
				0.0±0.35	X° REF±6°	DESIGNER	HU_XIAOYUN	2022.03.02	Pitch1.50 mm ZPD双排胶壳				
				0.00±0.25	X° ±3°	DRAWN	HAN_GAO	2022.03.02					
			SIZE: A4	0.000±0.10	X° X' ±2°					REV	A0	SHEET	2/2