

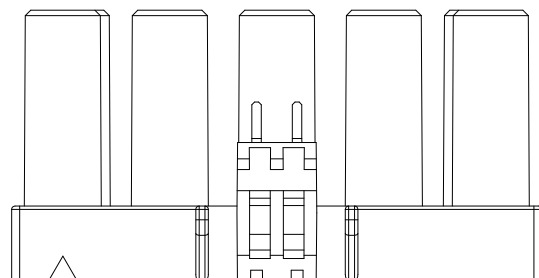


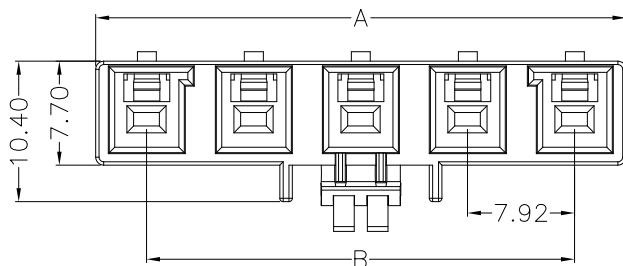


RoHS+HF



1 Pos.

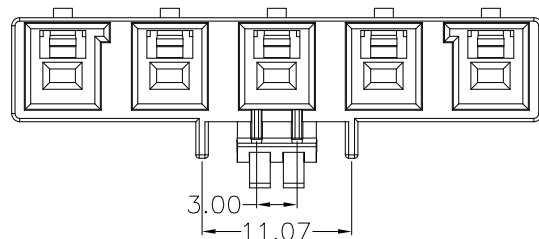

3 Pos. 5 Pos.button

Specification:

- * Housing: PA66,UL94V-0
- * Durability: 30 Cycles.
- * Current Rating: 30A
- * Rated Voltage: 600V AC/DC
- * Contact Resistance: 5 mΩ Max
- * Insulation Resistance: 1000MΩ Min
- * Dielectric Withstanding: 2500V
- * Operating Temperature: -35°C~+90°C.
- * The Product Using Material And Processing Must Conform To The "WL-PZ-142"Hsf Technical Standard Control Requirements
- * P/N:

38001 H C-1 XX X-P 0001

① ②③④⑤⑥⑦ ⑧

- ① Series No.
- ② H : Male
- ③ C :Pressure type
- ④ 1 : Single row
- ⑤ No. of Circuits
- ⑥ Color: A-Black
K-White
C-Red
- ⑦ Package Spec: P-Pe bag
- ⑧ Water code



Specification:

NO.of contacts	10 AWG	12 AWG	14 AWG	16 AWG
1	30A	25A	20A	15A
2	25A	20A	18A	15A
3	25A	20A	18A	15A
4	22A	18A	15A	13A
5	22A	18A	15A	13A


No. of Contacts	DIM A	DIM B
1	8.00	
2	15.50	7.92
3	23.42	15.84
4	31.34	23.76
5	39.26	31.68

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	NEW RELEASE	2022.3.2		LINEAR	ANGLES	1:1								
				0.0±0.35	X° REF±6°	APPROVED	WANG_JR	2022.3.2	38001HC-1XXX-P0001	ENDE05				
			UNIT: MM	0.00±0.25	X° ±3°	DESIGNER	HAN_GAO	2022.3.2	TITLE Pitch 7.92mm HRS 单排带扣胶壳					
			SIZE: A4	0.000±0.10	X° X' ±2°	DRAWN	HAN_GAO	2022.3.2			REV	AO	SHEET	1/2


RoHS+HF

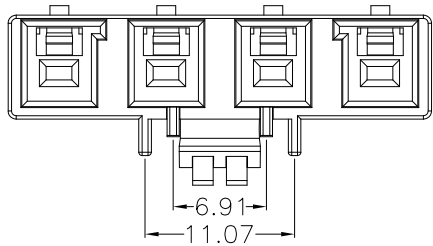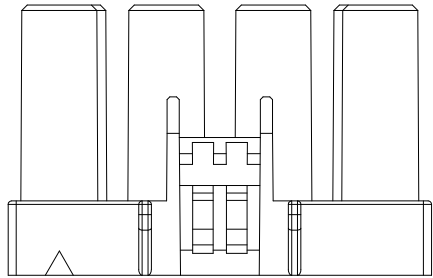


2 Pos. 4 Pos.button

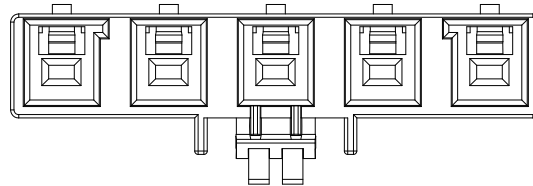

2-5PIN Guide Key : Inside Color : White

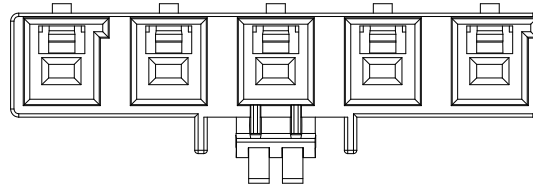

2-5PIN Guide Key : Right Side Color : Black

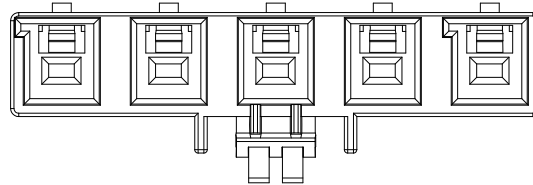

2-5PIN Guide Key : Left Side, Color : Red

Specification:

- * Housing: PA66,UL94V-0
- * Durability: 30 Cycles.
- * Current Rating: 30A
- * Rated Voltage: 600V AC/DC
- * Contact Resistance: 5 mΩ Max
- * Insulation Resistance: 1000MΩ Min
- * Dielectric Withstanding: 2500V
- * Operating Temperature: -35°C~+90°C.
- * The Product Using Material And Processing Must Conform To The "WL-PZ-142"Hsf Technical Standard Control Requirements
- * P/N:

38001 H C-1 XX X-P 0001

① ②③④⑤⑥⑦ ⑧

- ① Series No.
- ② H : Male
- ③ C :Pressure type
- ④ 1 : Single row
- ⑤ No. of Circuits
- ⑥ Color: A-Black
K-White
C-Red
- ⑦ Package Spec:
P-Pe bag
- ⑧ Water code

Specification:

NO.of contacts	10 AWG	12 AWG	14 AWG	16 AWG
1	30A	25A	20A	15A
2	25A	20A	18A	15A
3	25A	20A	18A	15A
4	22A	18A	15A	13A
5	22A	18A	15A	13A

No. of Contacts	DIM A	DIM B
1	8.00	
2	15.50	7.92
3	23.42	15.84
4	31.34	23.76
5	39.26	31.68

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	NEW RELEASE	2022.3.2		LINEAR	ANGLES	1:1								
			UNIT: MM	0.00±0.25	X° ±3°	APPROVED	WANG_JR	2022.3.2	38001HC-1XXX-P0001	ENDE05	TITLE Pitch 7.92mm HRS 单排带扣胶壳			
			SIZE: A4	0.000±0.10	X° X' ±2°	DESIGNER	HAN_GAO	2022.3.2						