
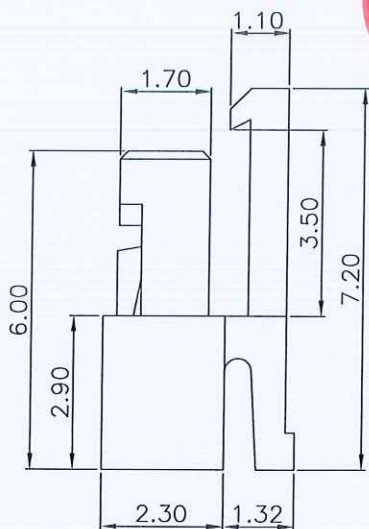
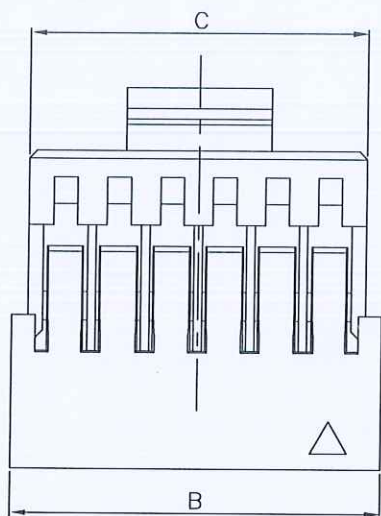
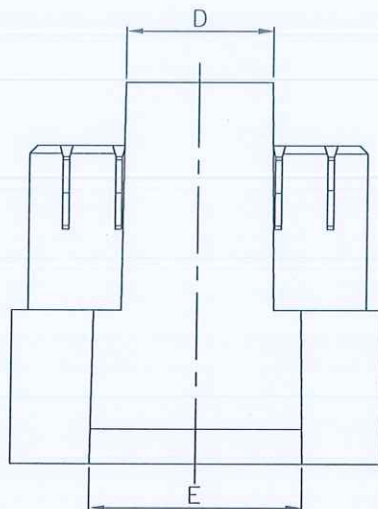


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

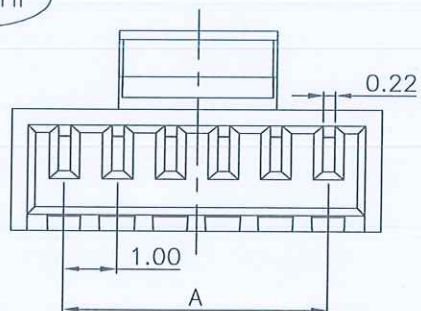

NOTE:

- 1.MATERIAL SPECIFICATION:
  - 1-1.HOUSING: PA66,UL94V-0
- 2.MECHANICAL PERFORMANCE:
  - 2-1.RETENTIVITY FORCE: 0.5KGF/Pin Min
  - 2-2.DURABILITY: 50 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
  - 3-1.CURRENT RATING: 1A AC/DC  
RATED VOLTAGE : 125V AC/DC
  - 3-2.CONTACT RESISTANCE: 20 mΩ MAX
  - 3-3.INSULATION RESISTANCE: 100MΩ Min
  - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
  - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

A1009 H 1 M-1 XX X 0

SERIES NO: \_\_\_\_\_ COLOR: A-BLACK S-NATURE

CONNECTOR: \_\_\_\_\_ H-HOUSING

TYPE CODE: \_\_\_\_\_ PIN Q'PY: 02~20

MALE FEMALE: \_\_\_\_\_ ROW NO: 1-SINGLE ROW

M-MALE



Circuit	Dimensions(mm)					Circuit	Dimensions(mm)				
	A	B	C	D	E		A	B	C	D	E
02	1.00	3.00	2.40	1.75	3.00	11	10.00	12.00	11.40	2.75	4.00
03	2.00	4.00	3.40	1.75	3.00	12	11.00	13.00	12.40		
04	3.00	5.00	4.40	2.75	4.00	13	12.00	14.00	13.40	或	或
05	4.00	6.00	5.40	2.75	4.00	14	13.00	15.00	14.40		
06	5.00	7.00	6.40	2.75	4.00	15	14.00	16.00	15.40	4.75	6.00
07	6.00	8.00	7.40			16	15.00	17.00	16.40		
08	7.00	9.00	8.40	或	或	17	16.00	18.00	17.40	或	或
09	8.00	10.00	9.40	4.75	6.00	18	17.00	19.00	18.40		
10	9.00	11.00	10.40	4.75	6.00	19	18.00	20.00	19.40	或	或
						20	19.00	21.00	20.40		

REV.	REVISION RECORD	DATE	⊙	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	26.01.29		LINEAR	ANGLES	APPROVED	26.1.29		A1009H1M-1XXX0	ENDE05	
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	26.01.29	TITLE:		REV: AO	SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	26.01.29	Pitch1.0mm NHB单排带扣无卤胶壳			