






The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

NOTE:  
 1.MATERIAL SPECIFICATION:  
 HOUSING:PA66 UL94V-0  
 2.ELECTRICAL PERFORMANCE:  
 2-1.CURRENT RATING:1A  
 2-2.VOLTAGE RATING:125V MAX  
 2-3.CONTACT RESISTANCE: 20mΩ Max.  
 2-4.INSULATION RESISTANCE: 100MΩ MIN  
 2-5.DIELECTRIC WITHSTANDING : 500V AC Min  
 3.ENVIRONMENTAL PERFORMANCE:  
 OPERATING TEMPERATURE: -25°C~+85°C.  
 4.PACKAGE SPEC: PE BAG  
 5.P/N:

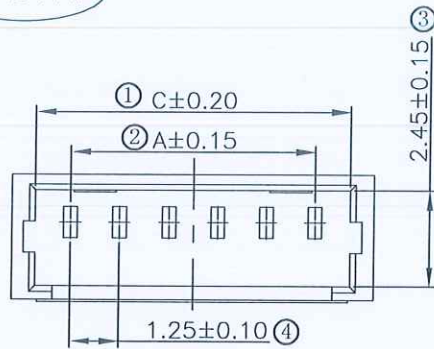

SERIES NO: A1251 H F-1 XX X 0  
 COLOR: S-NATURE  
 PIN Q'PY: 02~10  
 ROW NO: 1-SINGLE ROW  
 CONNECTOR: H-HOUSING  
 MALE FEMALE: F-FEMALE

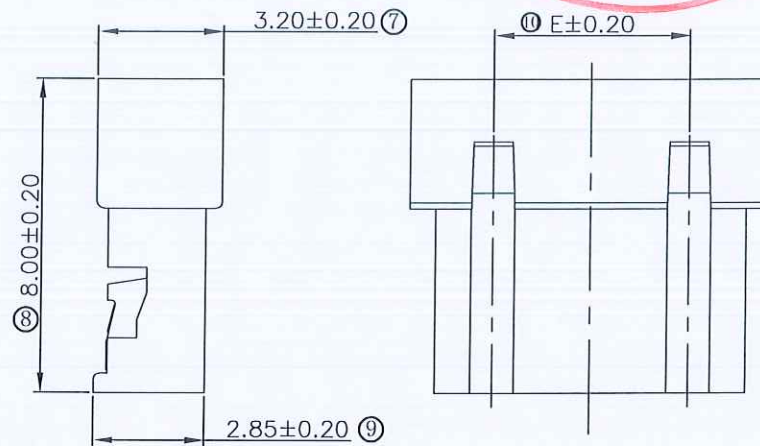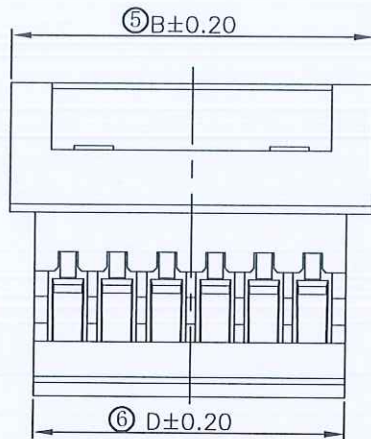

Ordering Information & Dimensions

Circuit	Dimensions(mm)				
	A	B	C	D	E
02	1.25	4.25	3.05	2.95	/
03	2.50	5.50	4.30	4.20	/
04	3.75	6.75	5.55	5.45	2.50
05	5.00	8.00	6.80	6.70	3.75
06	6.25	9.25	8.05	7.95	5.00
07	7.50	10.50	9.30	9.20	6.25
08	8.75	11.75	10.55	10.45	7.50
09	10.00	13.00	11.80	11.70	8.75
10	11.25	14.25	13.05	12.95	10.00

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	WanLian Technology Co., Ltd
A0	NEW RELEASE	26.02.02		SIZE: A4	LINEAR	ANGLES	1:1	APPROVED	26.2.2	A1251HF-1XXX0	
				0.00±0.25	X'±3'		DESIGNER	26.02.02	TITLE:		REV: A0
				0.000±0.10	X'X' ±2'		DRAWN	26.02.02	PITCH1.25MM 180' Female Housing		SHEET: 1/1