





The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

Circuit 1

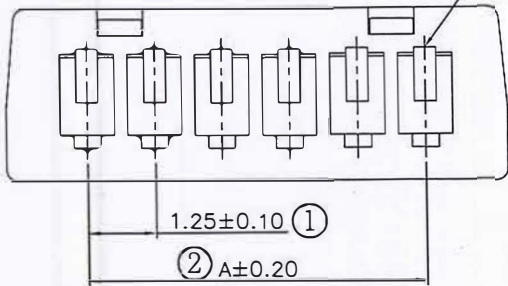

4P以上示意图

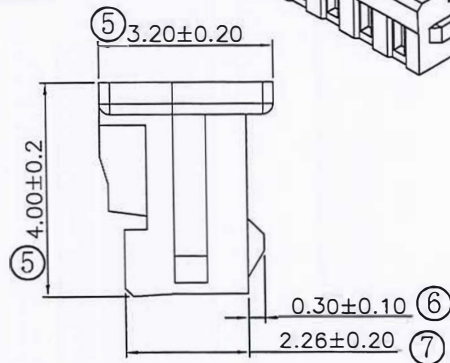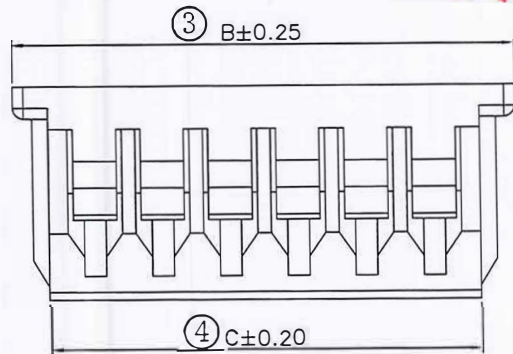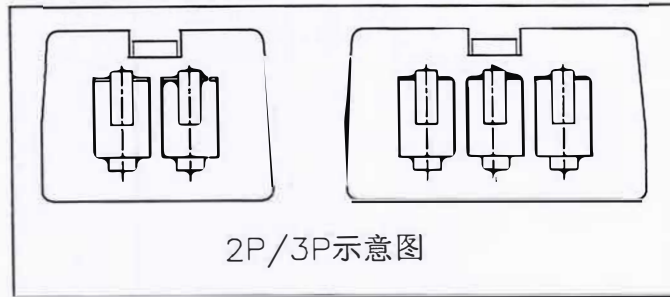

NOTE:

- 1.MATERIAL SPECIFICATION:
HOUSING:PA66 UL94V-0
- 2.MECHANICAL PERFORMANCE:
2-1.MAINTAIN FORCE: 0.5KGf/PIN MIN
2-2.DURABILITY: 50 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING:1A
3-2.VOLTAGE RATING:125V MAX
3-3.CONTACT RESISTANCE: 20mΩ Max.
3-4.INSULATION RESISTANCE: 100MΩ MIN
3-5.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC Min
- 4.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
- 5.PACKAGE SPEC:PE BAG
- 6.P/N ORDER:

SERIES NO: A1251 H M-1 XX X 0
 COLOR:
 A-BLACK
 K-WHITE
 S-NATURE
 PIN Q'PY:
 02~18
 ROW NO:
 1-SINGLE ROW

Ordering Information & Dimensions

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
02	1.25	4.25	2.95	11	12.50	15.50	14.20
03	2.50	5.50	4.20	12	13.75	16.75	15.45
04	3.75	6.75	5.45	13	15.00	18.00	16.70
05	5.00	8.00	6.70	14	16.25	19.25	17.95
06	6.25	9.25	7.95	15	17.50	20.50	19.20
07	7.50	10.50	9.20	16	18.75	21.75	20.45
08	8.75	11.75	10.45	17	20.00	23.00	21.70
09	10.00	13.00	11.70	18	21.25	24.25	22.95
10	11.25	14.25	12.95				

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 Wanlian Technology Co., Ltd	
A0	NEW RELEASE	26.02.02	LINEAR	ANGLES	1:1			A1251HM-1XXX0	ENDE05		
			0.0±0.35	X'REF±6°	APPROVED	8/8/4	26.2.2				
			UNIT:mm	0.00±0.25	X'±3°	DESIGNER	26.02.02	TITLE:			
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	26.02.02	PH1.25MM 180° Housing			
										REV: A0	SHEET: 1/1