


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

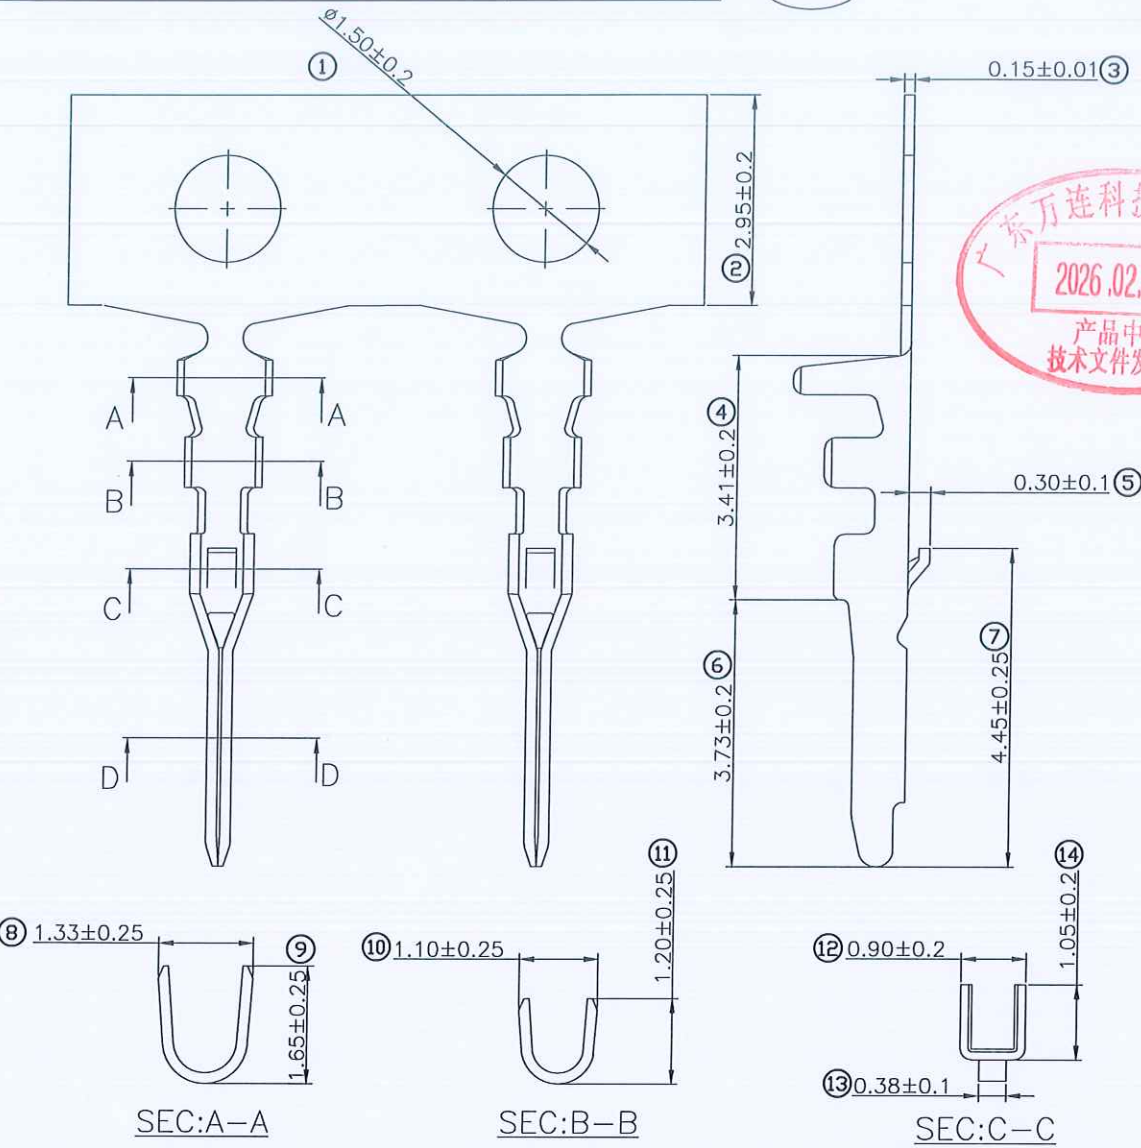

NOTE:

1.MATERIAL SPECIFICATION:

Terminal:Phosphor Bronze ,AWG # 28~# 32

2-1.INSERTION FORCE: 0.5kgf/pin max

2-2.REMOVAL FORCE: 0.5kgf/pin min

2-3.MAINTAIN FORCE: 0.5KGF/PIN MIN

2-4.DURABILITY: 50 CYCLES.

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING:1A

3-2.VOLTAGE RATING:125V MAX

3-3.CONTACT RESISTANCE: 20mΩ Max.

3-4.INSULATION RESISTANCE: 100MΩ MIN

3-5.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC Min

4.ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -25°C~+85°C.

6.PACKAGE SPEC:PAPER PLATE

7.P/N ORDER:

A1251 T M X-X
 SERIES NO: _____
 CONNECTOR: _____
 T-TERMINAL
 MALE FEMALE:
 F-FEMALE
 M-MALE
 PLATING:
 1-G/F
 A-ALL AU G/F
 C-BRIGHT TIN
 D-MATTE TIN
 METAL:
 P-PHOSPHOR BRONZE
 B-BRASS

REV.	REVISION RECORD	DATE	UNIT	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	26.02.03	mm	LINEAR: 0.0±0.35 ANGLES: X°REF±6° 0.00±0.25 X'±3° 0.000±0.10 X'X' ±2°	1:1	APPROVED	26.2.3	A1251TMX-X	ENDE05	
						DESIGNER	26.02.03	TITLE:		REV: A0
						DRAWN	26.02.03	Pitch1.25mm MALE Terminal		SHEET: 1/1