
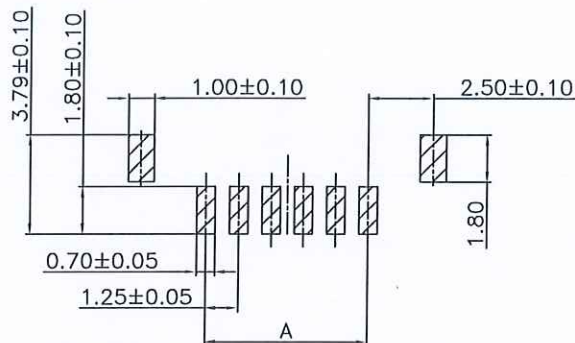


The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements



RoHS

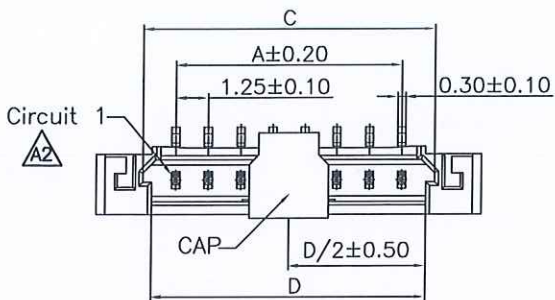


P.C.B. LAYOUT

NOTE:


- MATERIAL SPECIFICATION:
  - HOUSING:PA6T UL94V-0
  - CONTACTS:BRASS
  - Solder bobs: BRASS
- PLATING SPECIFICATION:
  - CONTACTS: TIN PLATED OVER ALL.
- ELECTRICAL PERFORMANCE:
  - RATED CURRENT : 1A AC,DC  
RATED VOLTAGE : 150V AC/DC
  - INSULATION RESISTANCE: 500MΩ MIN  
CONTACT RESISTANCE : 30mΩ MAX
  - WITHSTANDING VOLTAGE: 500V AC/minute
- ENVIRONMENTAL PERFORMANCE:
  - OPERATING TEMPERATURE: -25°C~+85°C.
- PACKAGE SPEC:REEL
- P/N:

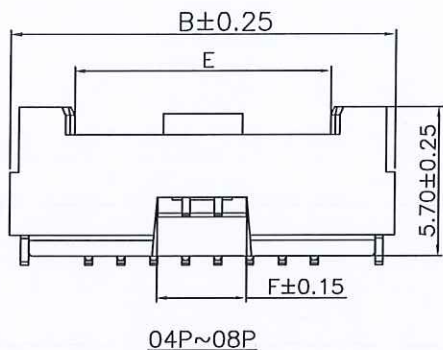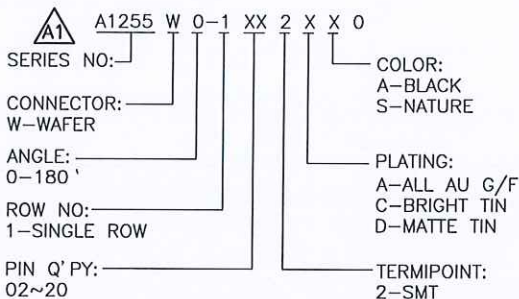


04P~08P



03P




02P




Ordering Information & Dimensions

Circuit	Dimensions(mm)					
	A	B	C	D	E	F
02	1.25	7.45	3.81	3.13	2.43	2.25
03	2.50	8.70	5.06	4.38	3.68	3.50
04	3.75	9.95	6.31	5.63	4.93	3.50
05	5.00	11.20	7.56	6.88	6.18	3.50
06	6.25	12.45	8.81	8.13	7.43	3.50
07	7.50	13.70	10.06	9.38	8.68	3.50
08	8.75	14.95	11.31	10.63	9.93	3.50
09	10.00	16.20	12.56	11.88	11.18	5.00
10	11.25	17.45	13.81	13.13	12.43	5.00
11	12.50	18.70	15.06	14.38	13.68	5.00
12	13.75	19.95	16.31	15.63	14.93	5.00
13	15.00	21.20	17.56	16.88	16.18	5.00
14	16.25	22.45	18.81	18.13	17.43	5.00
15	17.50	23.70	20.06	19.38	18.68	5.00
20	23.75	29.95	26.31	25.63	24.93	5.00

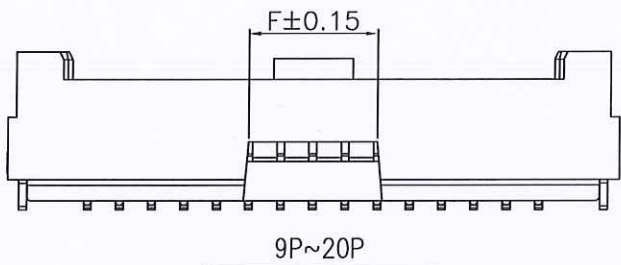

9P~20P

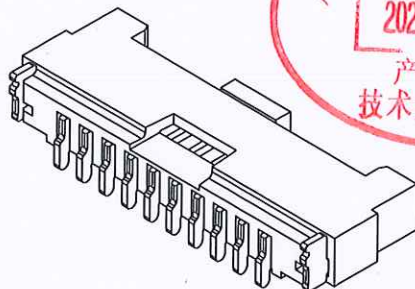


REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	21.01.13	LINEAR	APPROVED	2/21/20	21.10.10	A1255W0-1XX2XX0	ENDE05
A1	PART NUMBER RENEWAL	23.09.26	0.0±0.35	DESIGNER	丁	21.10.10	TITLE: 1.25mm PITCH 180°WAFER-SMT TYPE	REV: A3
A2	CHANGE CIRCUIT1 SEQUENCE	23.12.06	0.00±0.25	DRAWN	黄	21.10.10		
A3	CHANGE 03P DIM"F" TO 3.50	24.10.11	0.000±0.10					




SHEET: 1/2

The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements



RoHS

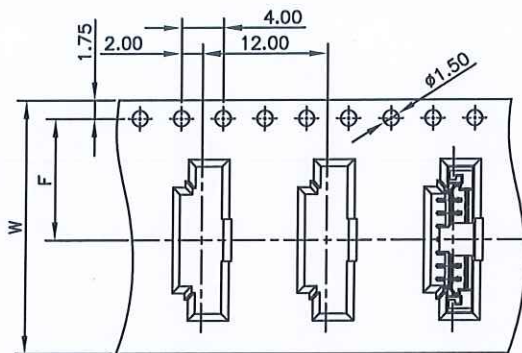



Unreeling direction  
02~07 Contacts

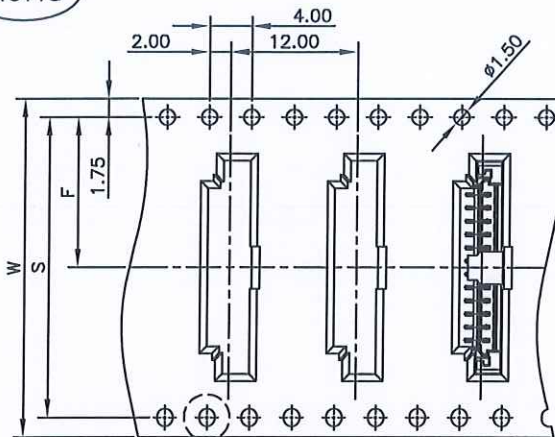

08~30 Contacts  
Unreeling direction

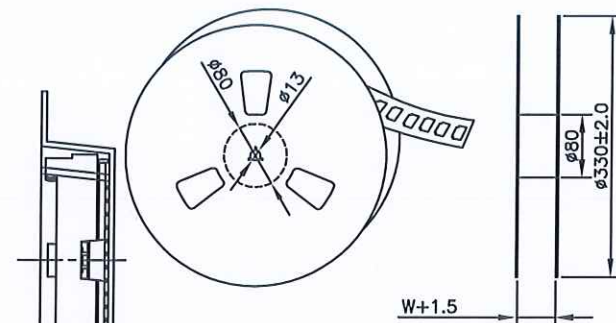

Carrier tape

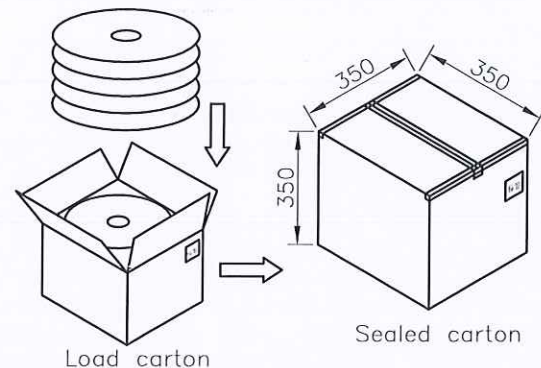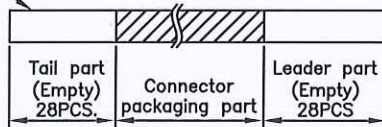

Load carton

Sealed carton

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel	Q'ty/Box
02P	16	7.50		900	14400
03P	24	11.50		900	10800
04P	24	11.50		900	10800
05P	24	11.50		900	10800
06P	24	11.50		900	10800
07P	24	11.50		900	10800
08P	32	14.20	28.40	900	8100
09P	32	14.20	28.40	900	8100
10P	32	14.20	28.40	900	8100
11P	32	14.20	28.40	900	8100
12P	32	14.20	28.40	900	8100
13P	44	14.20	28.40	900	6300
14P	44	14.20	28.40	900	6300
15P	44	14.20	28.40	900	6300
20P	56	20.20	40.40	900	4500
25P	56	20.20	40.40	900	4500
30P	56	26.20	52.40	900	4500

REV.	REVISION RECORD	DATE	UNIT	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.01.13	mm	LINEAR	1:1			A1255W0-1XX2XX0	ENDE05	
A1	PART NUMBER RENEWAL	23.09.26		ANGLES	APPROVED	8/8/24	24.10.10			
2	CHANGE CIRCUIT1 SEQUENCE	23.12.06	0.00±0.25	X'X'±3'	DESIGNER	JTB	24.10.10	TITLE: 1.25MM PITCH 180°WAFER-SMT TYPE, WAFER T BOSS TAPING SPEC	REV: A3	SHEET: 2/2
A3	CHANGE 03P DIM"F" TO 3.50	24.10.10	0.00±0.10	X'X'±2'	DRAWN:	黄岩	24.10.10			

1

2

3

4

5

6

7

8