


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS+HF

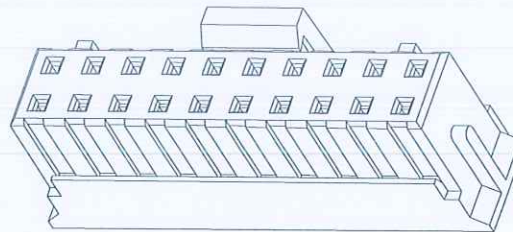

- NOTE:
- MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA66,UL94V-0
 - ELECTRICAL PERFORMANCE:
 - 2-1.CURRENT RATING: 3A AC/DC
 - 2-2.CONTACT RESISTANCE: 10 mΩ MAX
 - 2-3.INSULATION RESISTANCE: 1000MΩ Min
 - 2-4.DIELECTRIC WITHSTANDING : 800V
 - ENVIRONMENTAL PERFORMANCE:
 - 3-1.OPERATING TEMPERATURE: -25°C~+85°C.
 - PACKAGE SPEC: PE BAG
 - P/N:





A2006 H 1 M-2 XX X 0

SERIES NO: _____ COLOR: A-BLACK, K-WHITE

CONNECTOR: H-HOUSING

TYPE CODE: _____ PIN Q'PY: 04~32

MALE FEMALE: _____ ROW NO: 2-DOUBLE ROW

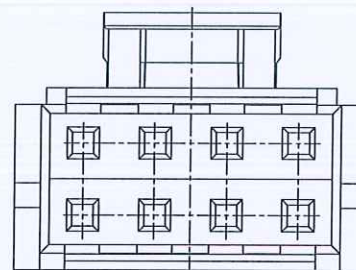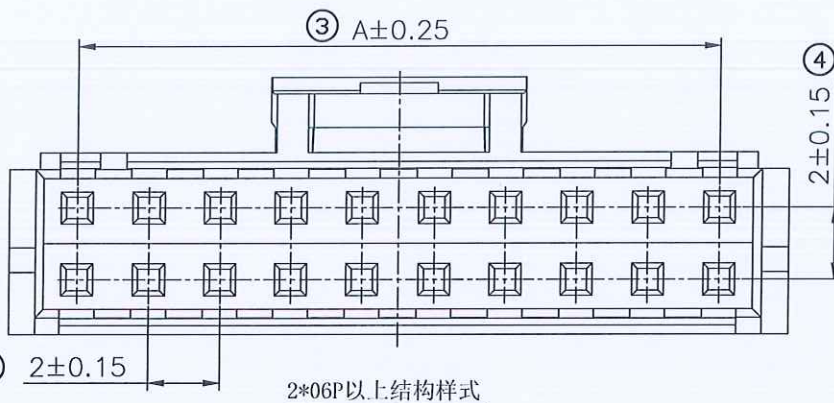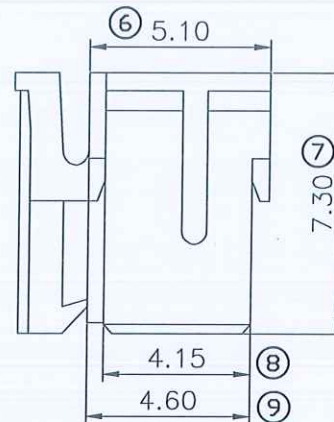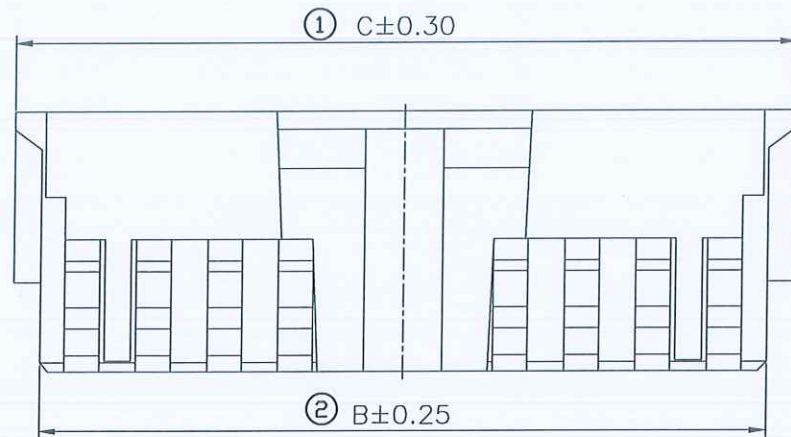

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
2*02	2.00	4.50	5.90	2*10	18.00	20.50	21.90
2*03	4.00	6.50	7.90	2*11	20.00	22.50	23.90
2*04	6.00	8.50	9.90	2*12	22.00	24.50	25.90
2*05	8.00	10.50	11.90	2*13	24.00	26.50	27.90
2*06	10.00	12.50	13.90	2*14	26.00	28.50	29.90
2*07	12.00	14.50	15.90	2*15	28.00	30.50	31.90
2*08	14.00	16.50	17.90	2*16	30.00	32.50	33.90
2*09	16.00	18.50	19.90				

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.10.28	 UNIT:mm SIZE: A4	LINEAR	ANGLES	 APPROVED	26.2.23	A2006H1M-2XXX0	ENDE05	
A1	05P STRUCTURE CHANGE	26.02.03		0.0±0.35	X'REF±6'					
				0.00±0.25	X'±3'	 DESIGNER	26.02.03	TITLE:		
				0.000±0.10	X'X' ±2'	 DRAWN	26.2.03	Pitch2.0mm PHD双排带扣 Housing 无卤		

REV: A1 SHEET: 1/1