

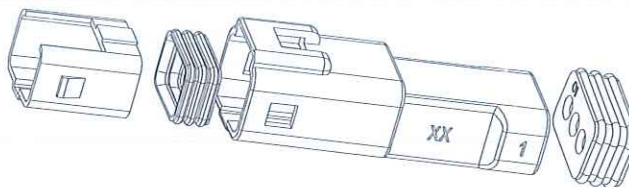
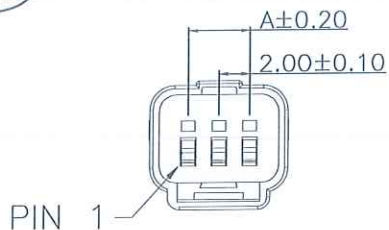





The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

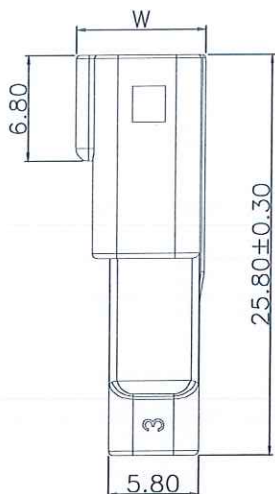

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING: PBT,UL94V-0
 2.ELECTRICAL PERFORMANCE:
 2-1.CURRENT RATING: 3A AC/DC
 RATED VOLTAGE : 100V AC/DC
 2-2.CONTACT RESISTANCE: 10 mΩ MAX
 2-3.INSULATION RESISTANCE: 1000MΩ Min
 2-4.DIELECTRIC WITHSTANDING : 1000V
 3.ENVIRONMENTAL PERFORMANCE:
 3-1.OPERATING TEMPERATURE: -40°C~+105°C.
 4.WIRE RANGE:22AWG~24AWG(OD:1.60~1.40MM)
 5.PACKAGE SPEC: PE BAG
 6.P/N:

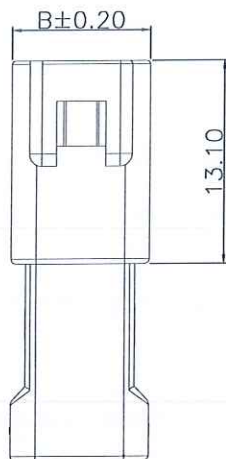

SERIES NO: C2004 H F-1 XX X 0
 COLOR: S-NATURAL
 CONNECTOR: H-HOUSING
 MALE FEMALE: F-FEMALE
 PIN Q'PY: 02~04
 ROW NO: 1-SINGLE ROW



NO.	DIM	
	A	B
2P	2.00	7.00
3P	4.00	9.00
4P	6.00	11.00

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	26.03.24	LINEAR	ANGLES	1:1			C2004HF-1XXX0	ENDE05
			0.0±0.35	X°REF±6'	APPROVED	刘艺坤	26.3.24		
			UNIT:mm	0.00±0.25	DESIGNER	黄碧娟	26.03.24	TITLE:	
			SIZE: A4	0.000±0.10	DRAWN	刘艺坤	26.03.24	Pitch2.00mm JWPF线对线防水IP67 单排 Female Housing	


 WanLian Technology Co., Ltd
 REV: A0 SHEET: 1/1