






The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

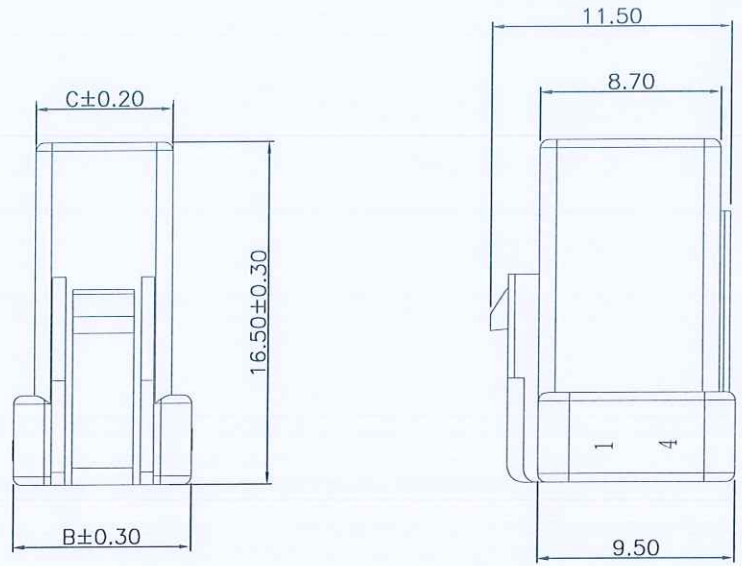

NOTE:  
 1.MATERIAL SPECIFICATION:  
 1-1.HOUSING: PBT,UL94V-0  
 2.ELECTRICAL PERFORMANCE:  
 2-1.CURRENT RATING: 3A  
 2-2.CONTACT RESISTANCE: 20 mΩ MAX  
 2-3.INSULATION RESISTANCE: 1000MΩ Min  
 2-4.DIELECTRIC WITHSTANDING : 1000V AC  
 3.ENVIRONMENTAL PERFORMANCE:  
 3-1.OPERATING TEMPERATURE: -40°C~+105°C.  
 4.WIRE RANGE:22AWG~24AWG(OD:1.60~1.40mm)  
 5.PACKAGE SPEC:  
 6.P/N:

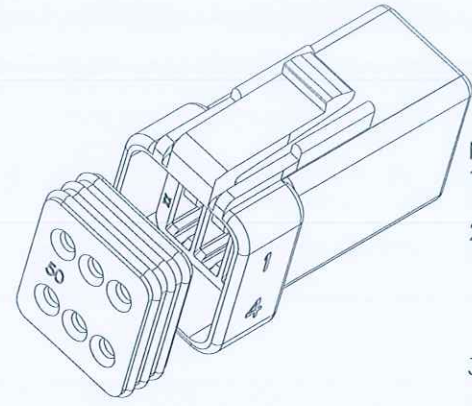

SERIES NO: C2004 H M-2 XX X 0  
 COLOR: A-BLACK, K-WHITE  
 CONNECTOR: H-HOUSING  
 PIN Q'PY: 12PIN  
 MALE FEMALE: M-MALE  
 ROW NO: 2-DOUBLE ROW

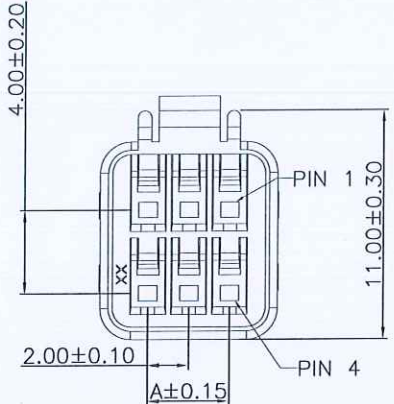

NO.	DIM		
	A	B	C
2X3P	4.00	8.70	6.70
2X4P	6.00	10.70	8.70
2X5P	8.00	12.70	10.70
2X6P	10.00	14.70	12.70

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	25.12.10	LINEAR	ANGLES	APPROVED	马子华	26.3.25	C2004HM-2XXX0	ENDE05
			0.0±0.35	X'REF±6'	CHECK	刘世焜	26.03.25	TITLE:	
			UNIT:mm	0.00±0.25	X'±3'	DRAWN	黄恩娟	26.03.25	Pitch2.00mm 防水IP67 Male Housing
			SIZE: A4	0.000±0.10	X'X' ±2'				

WanLian Technology Co., Ltd  
 REV: A0 SHEET: 1/1