


RoHS

Specifications:
 Rated Voltage : 125V AC/DC
 Rated Current : 1A AC,DC
 Withstand Voltage : 250V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C

11255H00-NPX-HF-NK





- ① Series No.
 ② H90 : Side Contact
 H00 : Up Contact
 ③ No. of Circuits
 ④ X : Product color(A--Y)
 Blank : Natural type
 ⑤ HF : Halogen Free
 ⑥ NK : No Mark
 Blank : Mark

Dimensional Ordering Information:				
Circuits Part No	Dimensions			
	A	B	C	D
2P	1.25	2.65	5.72	
3P	2.50	3.90	6.97	
4P	3.75	5.15	8.22	2.50
5P	5.00	6.40	9.47	3.75
6P	6.25	7.65	10.72	5.00
7P	7.50	8.90	11.97	6.25
8P	8.75	10.15	13.22	7.50
9P	10.00	11.40	14.47	8.75
10P	11.25	12.65	15.72	10.00
11P	12.50	13.90	16.97	11.25
12P	13.75	15.15	18.22	12.50
13P	15.00	16.40	19.47	13.75
14P	16.25	17.65	20.72	15.00
15P	17.50	18.90	21.97	16.25
16P	18.75	20.15	23.22	17.50
17P	20.00	21.40	24.47	18.75
18P	21.25	22.65	25.72	20.00
19P	22.50	23.90	26.97	21.25
20P	23.75	25.15	28.22	22.50
26P	31.25	32.65	35.72	22.50
30P	36.25	37.65	40.72	22.50

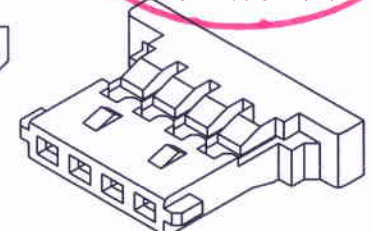

Suitable for JCTC 11255 series terminal

Part No.	Material	Color
11255H00-NP	Nylon 66,UL 94V-0	本色
11255H00-NPA	Nylon 66,UL 94V-0	黑色
11255H00-NP-NK	Nylon 66,UL 94V-0	本色
11255H00-NPA-NK	Nylon 66,UL 94V-0	黑色
11255H00-NP-HF	Nylon 66,UL 94V-0	本色无卤
11255H00-NPA-HF	Nylon 66,UL 94V-0	黑色无卤
11255H00-NP-HF-NK	Nylon 66,UL 94V-0	本色无卤

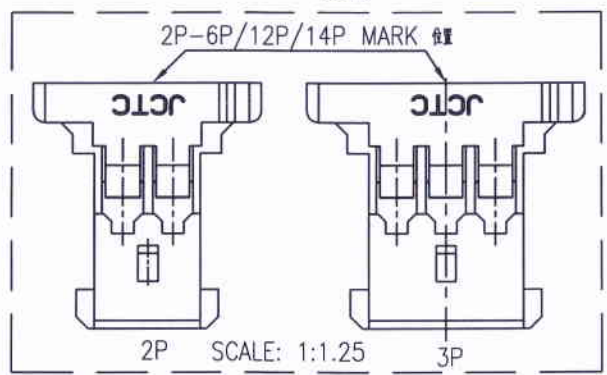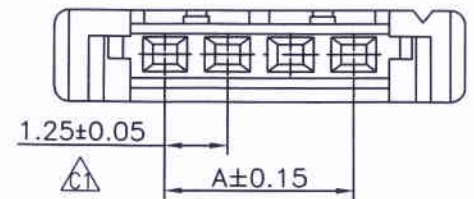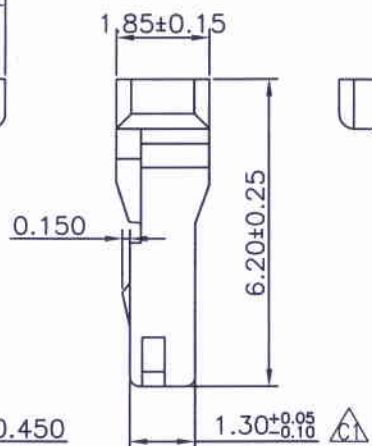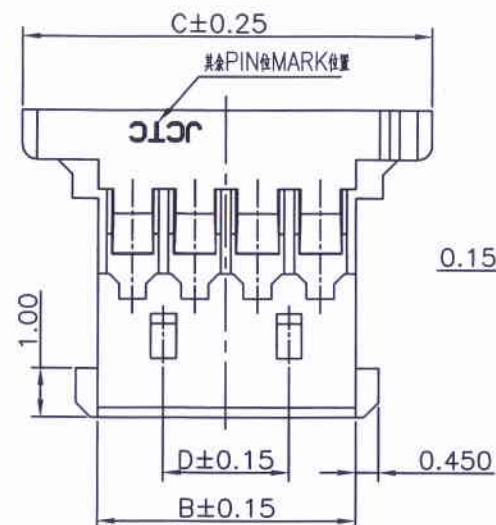

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE
C2	TN1010070090	10.10.07	LINEAR	1:1		
C3	新增黑色无卤规格料号	11.03.21	0.0±0.25	APPROVED		
C4	修改主体MARK位置	12.07.23	0.00±0.15	DESIGNER		
C5	变更公司名称	17.03.30	0.000±0.08	DRAWN	邓群庄	17.03.30

JCTC® 胜蓝科技股份有限公司
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司
 TITLE: 51146 1.25mm PITCH HOUSING

PART. NO.: 11255H00-NPX-XX-XX
 DWG. NO.: ENDE05
 REV: C5 SHEET: 1/1